



VENTILATION SOLUTIONS

General catalogue new 2025 HRV and HVAC range

New general catalogue dedicated
to Heat Recovery Ventilation systems,
Air Distribution and hybrid solutions


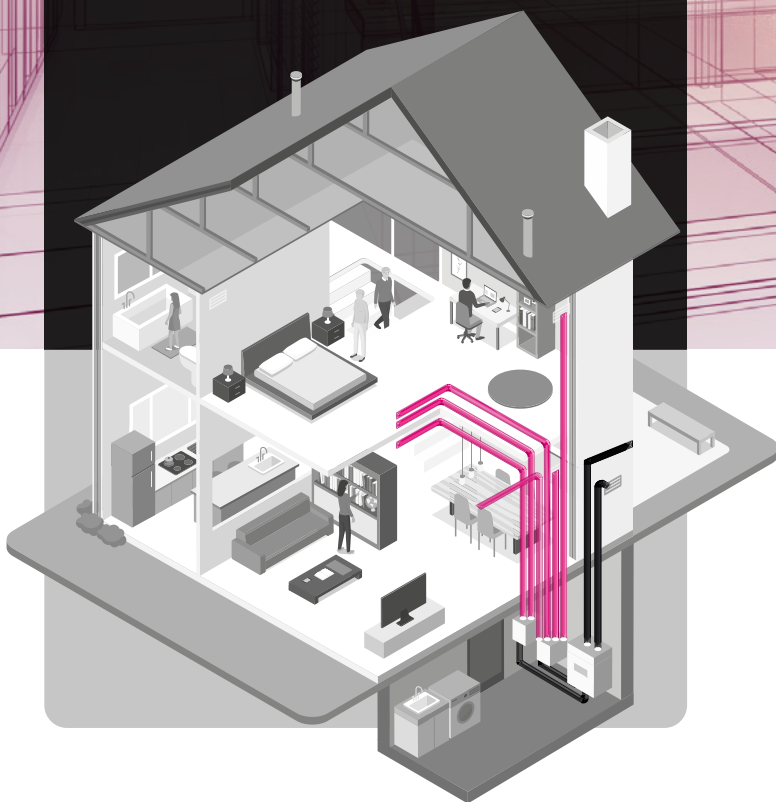


filt agix®

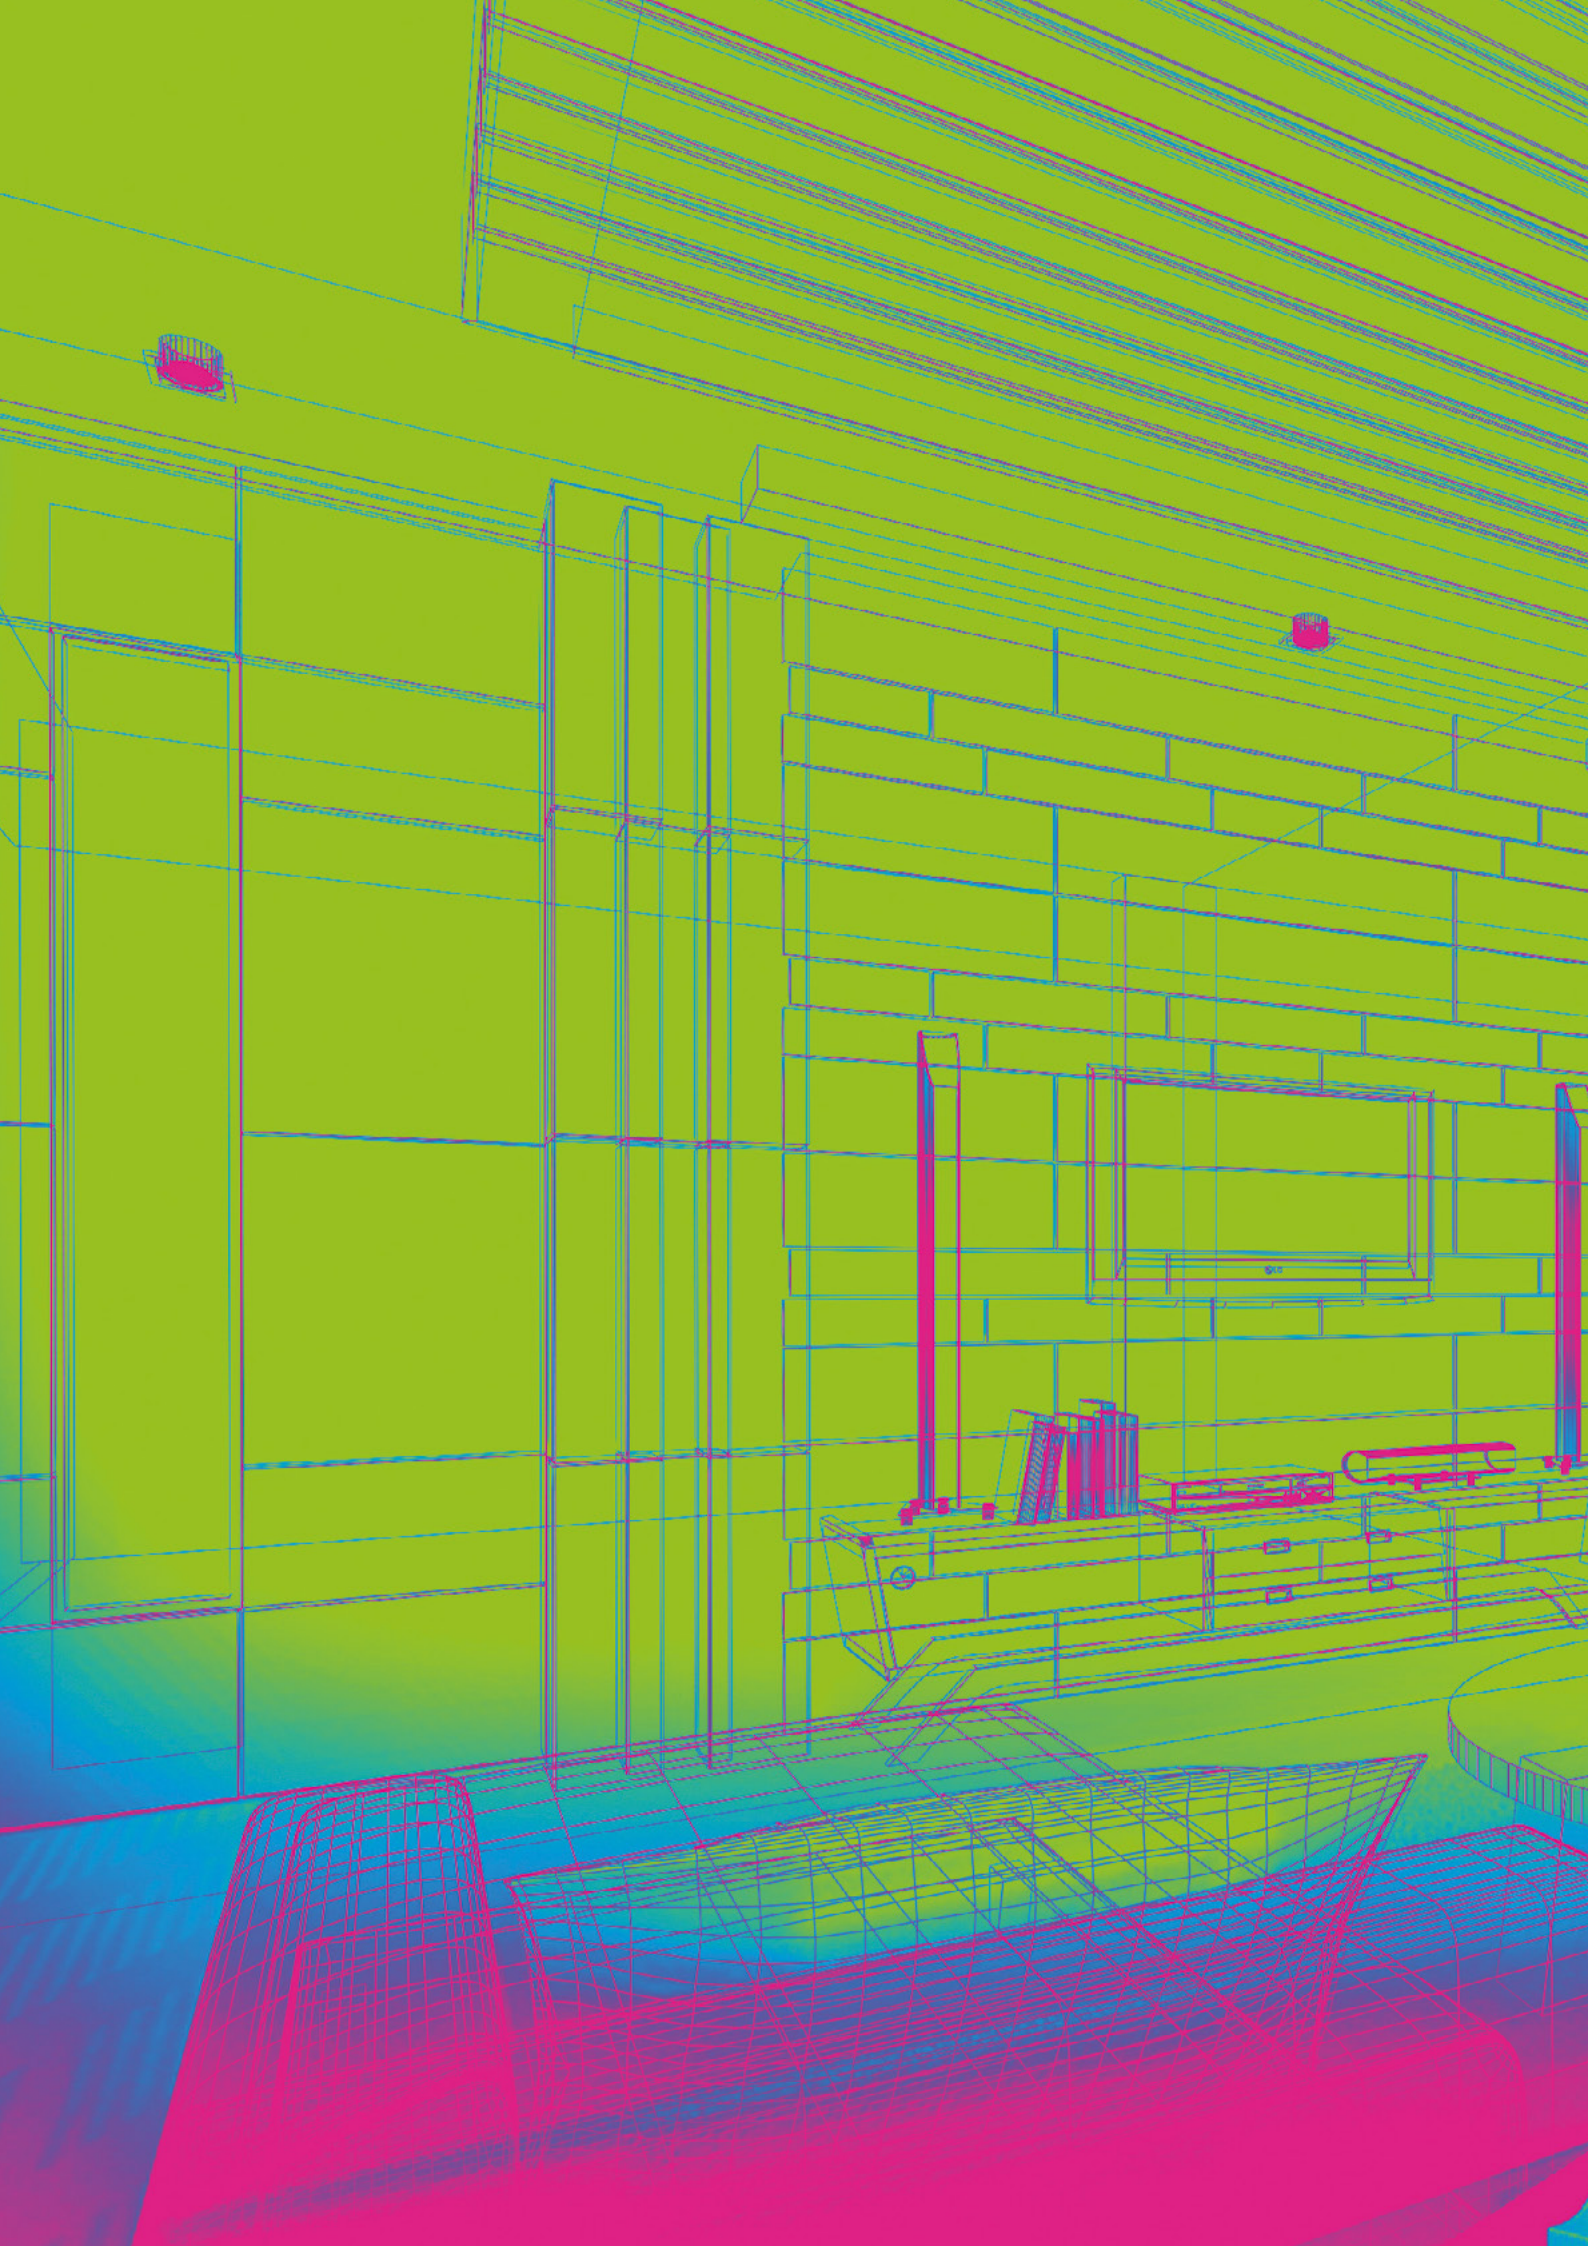



General catalogue
ventilation and air conditioning products 2025

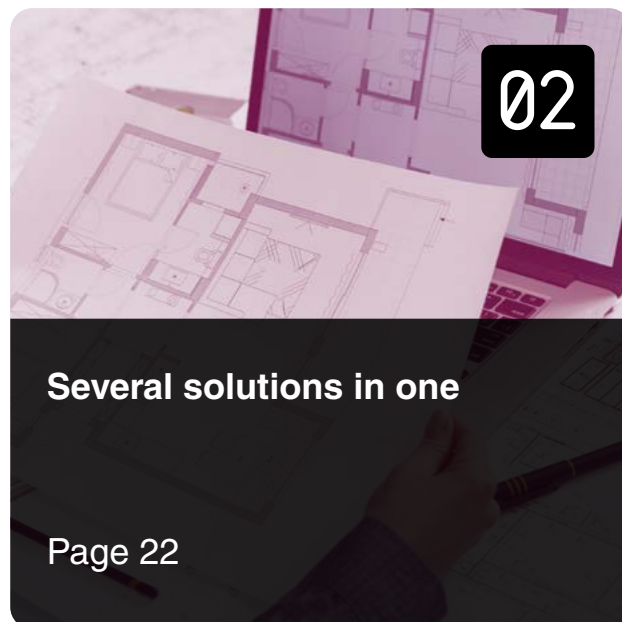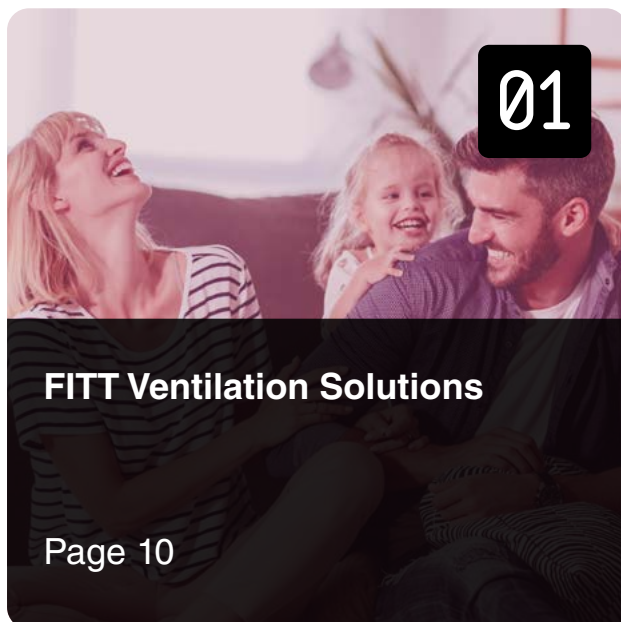

FITT and AIRPLAST	4	FITT Agix® Cross: Centralised HRV with heat recovery	24
FITT	6	FITT Agix® Mix: HRV and air distribution	26
The responsible flow	8	FITT Agix® One: decentralized HRV	28
The HRV system with superior performance	12		
FITT Agix®: the Kiwa Quality (KQ) certified system according to EN 17192	13		
HRV standards	14		
Ventilation units	15		
Air diffusion	16		
Antibacterial protection	18		
Filtration	19		
Diffusion grilles	20		



Heat Recovery Ventilation

Page 30

Ventilation units	34
Air distribution	50
Air conditioning-HRV air distribution	78
Airmix air conditioning-HRV	84



Air systems and components

Page 88

PVC plenum for ducted units	92
Air distribution pipes and accessories	102
Air diffusion and accessories	103

fitt and airplast

Since 2022, Airplast has been part of the FITT Group

Already a leader in the ventilation and air distribution market, Airplast joins the FITT Group: a partnership that completes the offer with the aim of ensuring technological and sustainability excellence.

The company

Airplast was founded in 1992 with the aim of offering the best technology in the field of heat recovery ventilation and air distribution.

Airplast stands out for its ability to combine innovative functional solutions with high aesthetic standards, offering reliable products characterised by market-leading technologies.

Always committed to innovation and a leader in the field of air diffusion, Airplast is able to offer a complete range of products, including custom made, capable of satisfying any technical and construction requirement, in extremely short times.

The philosophy

The challenge has always been to invest in internal and external “know-how”, differentiating itself from the competition by not being a simple “box moving company”, designing and building highly professional solutions/systems and offering a first-class service, together with constant search for technology and innovation.

Solutions that can be adapted to any site requirement, designed to facilitate installation in compliance with current regulations.



The products

The products are manufactured with the utmost respect for the environment, only using recyclable materials and taking special care not to create any waste for disposal during the installation cycle.

PVC is the main element of the product range: this material does not produce condensation, is anti-corrosive, does not generate noise, is light, is fireproof, can be coloured, does not absorb energy, and is therefore ideal and recommended in rooms with high energy efficiency class.

Airplast is a unique interlocutor, able to respond to any request with maximum environmental sustainability.

Certifications

Airplast is ISO 9001 certified for the management and quality of the design, production and marketing of aeronautical products and accessories for air distribution and heat recovery ventilation; it also complies with the UNI EN 15780:2011 standard for the design/production and storage of materials, in order to ensure maximum cleanliness of the components.

FITT, a leading global group established in Italy in 1969 - and today a benefit company - is a pioneer in the production and development of solutions for the transfer of fluids for domestic, professional and industrial applications.

Ingenious for life

The mission of the FITT group is to improve the performance of its customers by providing pipes, hoses and systems for the transport of liquid, gaseous and solid substances, with products at the forefront of technology, design and sustainability.

Ongoing progress

FITT, currently led by Alessandro Mezzalana, was founded in 1969 by his father Rinaldo. With headquarters in Sandrigo, in the province of Vicenza, FITT – an international reference point in its industry – currently has 14 production sites, 5 commercial branches and 15 logistic centres in Europe and worldwide.

FITT SOLUTIONS



Gardening
Solutions




Industrial
Solutions



Marine
Solutions



Food & Beverage
Solutions

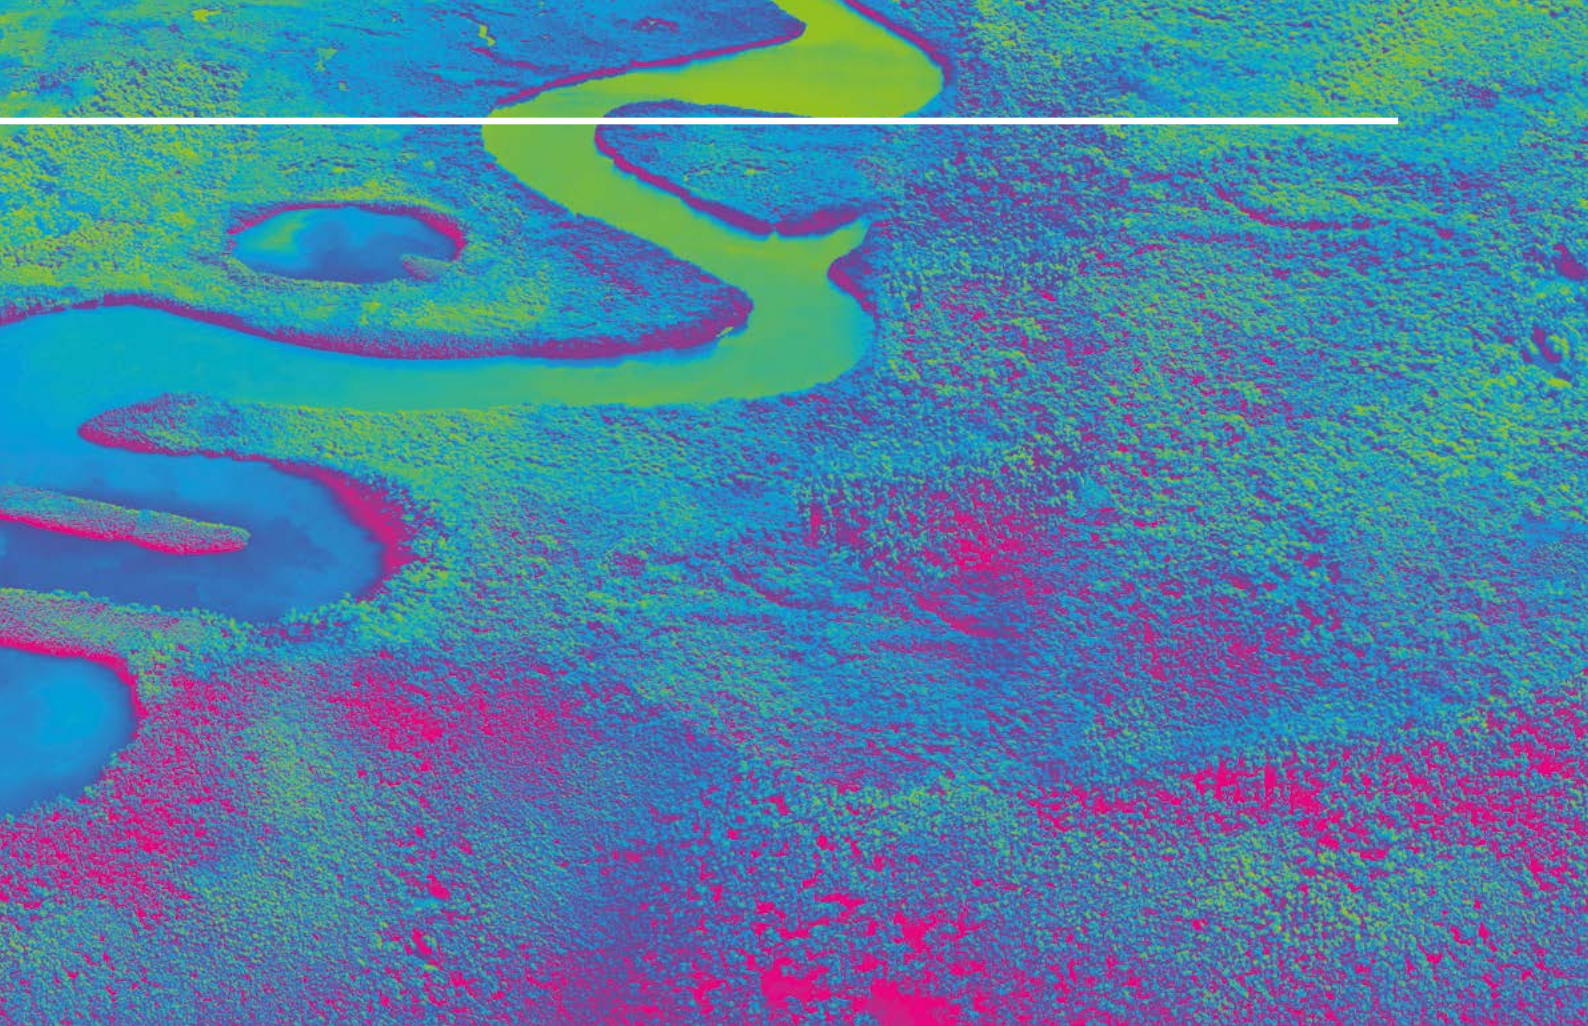

Innovative and pioneering technology

FITT strongly believes in Open Innovation and works with an international network of partners, universities and research bodies, taking advantage of external organisations for the validation of its own quality tests and protocols, defining the impact of its products.

Multiplant production and logistics

Flexible logistics, automated and customised, capable of meeting the requests of the various sales channels served by our organisation: from large customers to the single individual purchasing on line. The network of logistics centers of FITT, strategically located throughout Europe, allows to deliver in 48/72 h in the main European markets.

FITT Solutions

FITT develops state of the art solutions for the handling of fluids, ensuring reliability, safety, performance and ease of use applicable to 9 dedicated and specialised business units.



Building
Solutions



Pool & SPA
Solutions



Ventilation
Solution



Agriculture
Solutions



Infrastructure
Solutions

«the task that we are called to fulfil must contribute to make this world a better place, for us and for future generations»

Alessandro Mezzalana
CEO

Certified



This company meets high standards of social and environmental impact.

Corporation

THE RESPONSIBLE FLOW: FITT'S SUSTAINABILITY STRATEGY FOR 2030

The FITT journey

In FITT's vision, being a responsible company means transforming its business model to achieve an ideal balance, with the objective of **creating economic value and having a positive impact on the planet and on people's lives.**

FITT is a “**Società Benefit**”, and in addition to the object of making a profit, it has added in its statute the public and official commitment of a positive impact on society and the biosphere, operating in a sustainable and transparent manner.

Corporate responsibility

FITT is committed to producing state-of-the-art products, providing its customers with the best technologies in the field of fluid handling.

Investing in innovation, scientifically measuring the impact of its offering and adopting a supply chain approach that aims at minimising negative effects throughout the product life cycle, enables FITT to create an increasingly sustainable business model.

THE 7 GOALS SELECTED BY FITT





Environment:

FITT is engaged on two parallel fronts: the management of energy, water and waste, and the development of innovative products.

In the area of processes, the most important objective is **decarbonisation**, with the aim of setting **CO₂e reduction** targets (scopes 1-2-3), to be reached by the FITT GROUP by 2025. With this in mind, in 2023 FITT has started measuring its **Carbon Footprint** in accordance with the ISO 14064 GHG inventory. As far as sustainable development is concerned, the aim is to make sure that by 2025 10% of our turnover is from innovative products with lower impact, producing 10% less Co₂e q than their traditional equivalents.

Social:

FITT is engaged again on two complementary fronts, one internal and one external. The first includes the **creation of wellbeing, inclusion and security for the FITT People**. The second concentrates on support of social and environmental initiatives, both local and international, mainly in the fields of health, women, youth and people with special needs, creating partnerships with the stakeholders.

Governance:

Act as a responsible company by rewriting a new business model that creates shared value, thus contributing to bring about a positive impact in the life of people and the environment.



fitt ventilation solutions



An increasingly wider and better performing heat recovery ventilation range

The new range of FITT Agix® products meets to the needs of the ventilation market with an offering strongly focused on flexibility, best performance and aesthetic results, whilst also guaranteeing excellent air quality and the best living standards.



Solutions designed for the integration of HRV solutions with air distribution systems


FITT Agix® presents itself to the market as a valid solution for those looking to integrate their HRV with HVAC systems. A single solution for maximum adaptability and ease of installation.



Not just HRV; FITT Agix now also offers solutions for air distribution systems

FITT Agix® offers dedicated solutions for air conditioning systems, by proposing temperature control systems that allow easy management of multiple climate zones inside the home.



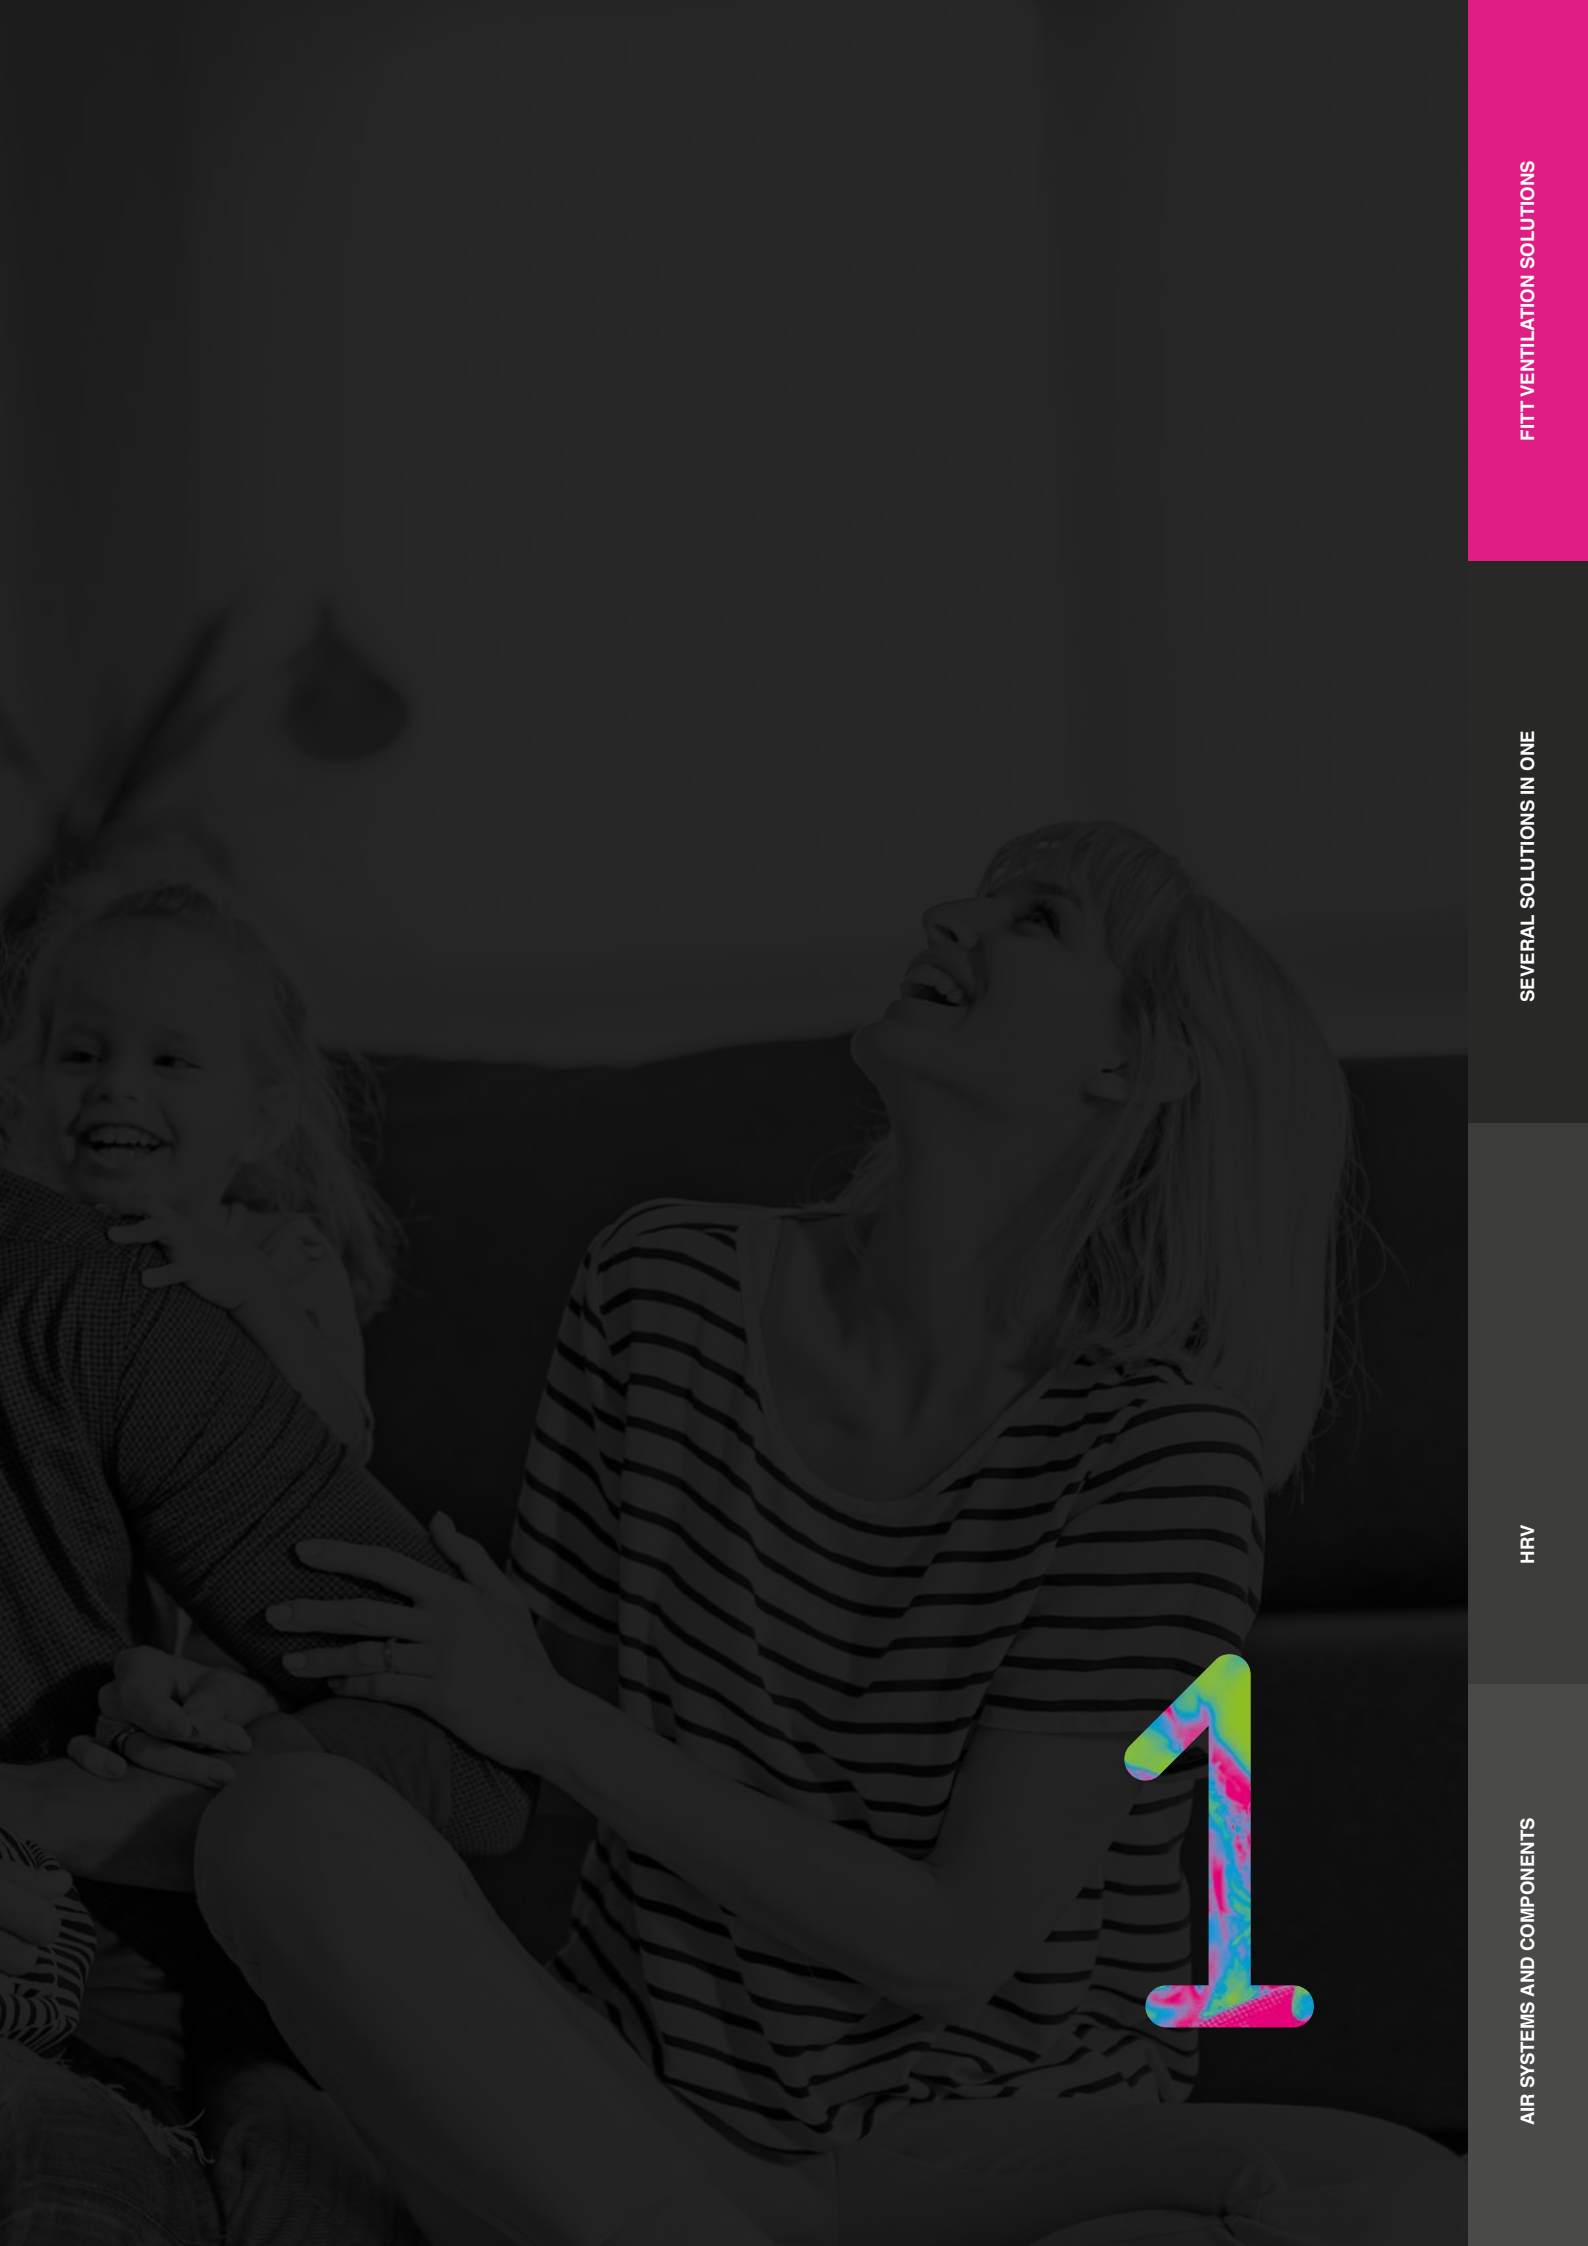

the hrv system with superior performance

Since the signing of the Kyoto Protocol, the focus on energy efficiency and sustainability of buildings has become more stringent. Within the EU, it has led to the enactment of a series of regulations (currently being implemented by the various states) aimed at promoting better energy performance of buildings. According to these directives, all new buildings from 2016 will have to meet the requirements of class A, and those from 2021 of class A+, making the installation of HRV systems mandatory. In response to this need, FITT has developed **FITT Agix®**, the new Heat Recovery Ventilation system that offers a complete and modular solution capable of facilitating the work of designers, retailers, installers and customers.

All this is possible thanks to its characteristics, conceived to simplify all stages and get the most out of your system. With its special features, FITT Agix® is the ideal system for: the **designer**, who can design an efficient system with just a few steps; the **retailer**, who only needs to handle a small number of references; the **installer**, who thanks to the flexibility and completeness of the components can easily solve any unforeseen or critical on-site issues; and, finally, the user, who can very easily identify the ideal configuration to ensure the best level of comfort in their home.



fitt agix®: the kiwa quality (kq) certified system according to en 17192(*)



A

A
K89 - EN 17192
KIP-104695

Indoor air quality is fundamental to people's health and well-being: in developed countries, people spend 90% of their time indoors. Indoor air can be more polluted than outdoor air, because chemical indoor pollutants and biological man-made contaminants are added to the outdoor pollutants that are trapped and accumulated.

This is why FITT, an international group pioneering the development of innovative technologies and solutions for the flow of fluids for domestic, professional and industrial use, has developed FITT Agix®, the first HRV distribution and diffusion system **certified by Kiwa according to the EN 17192:2019 European standard.**

The recently introduced EN 17192 European standard is **the first standard dedicated to non-metallic ventilation pipelines in residential buildings** and fully revisits the approach to the entire distribution system, introducing many tests and evaluations:

- **system air-tightness**, which measures the air-tightness of non-metallic pipelines in accordance with EN ISO 5817: 2017"
- **headloss of the individual components**, which measures the pressure drop of non-metallic pipelines in accordance with EN ISO 5801: 2017"
- **thermal conductivity**, which determines the thermal resistance of the material in accordance with EN 12667;
- **operating temperatures**, which defines the operating temperature range for the use of ventilation pipelines;
- **fire resistance**, which determines the reaction to fire in accordance with EN 13501
- **resistance to external pressure**, which determines the maximum allowable force in accordance with EN 17192;
- **antimicrobial resistance**, which measures the extent of microbial growth in accordance with ISO 846 and ISO 22196;
- **absence of hazardous substances**, which determines the registration, evaluation, authorisation and restriction of chemicals (REACH), in accordance with the RoHS directives and the PAHs (polycyclic aromatic hydrocarbons) directives on hazardous substances, as indicated in EC Regulation No. 1907/2006.

The new EN 17192 European standard covers all the aspects typical of a ventilation system: from the raw materials used in the production of the components to the conditions of use of the installed HRV system.

The elements used in FITT Agix® have been tested according to the strict provisions introduced by the standard, to guarantee the quality, safety and maximum durability of the system.

FITT Agix® is the certified, complete, quiet and performing modular solution by FITT that easily adapts to any installation condition.

(*) with reference to the ventilation system object of certification number KIP-104695/01, issued on 25.09.2020, PKC0004296 report



residential ventilation standards

SYSTEM SIZING STANDARDS

UNI EN 10339:1995 - It provides a classification of the systems, the definition of the minimum requirements and the values of the reference quantities during operation. It applies to air conditioning systems intended for the well-being of people in enclosed buildings.

UNITS 11300-1:2014 - It provides data and methods for the determination of the thermal energy needs of the building for summer and winter air climate control.

UNI EN 16798-1:2019 - It replaced the UNI EN 15251:2008 standard. It specifies the indoor environment parameters in terms of thermal energy, indoor air quality, lighting and acoustics, and how to meet these parameters during the design of the system of the building and the energy performance calculations.

UNI EN 16798-7:2018 - It replaced the UNI EN 15242:2008 standard. It describes the methods to calculate the ventilation air flow rates for buildings, to be used during energy calculations, and heating and cooling loads.

UNI 10349-1:2016 - It replaced the UNI/TR 11328-1:2009 standard. Only applicable to Italy, it provides the conventional climate data required for the assessment of the energy and thermo-hygrometric performance of buildings, including summer and winter air conditioning systems.

ISO 17772-1:2017 - Indoor air quality and energy performance values of buildings.

STANDARDS RELATING TO COMPONENTS

UNI EN 13142:2013 - It specifies the performance characteristics of the components/products that may be required for the design and sizing of residential ventilation systems, in order to ensure pre-calculated comfort conditions relating to temperature, air speed, humidity, hygiene and noise in the occupied area.

UNI EN 13141-2:2010 - Exhaust and supply air terminal devices.

UNI EN 13141-7:2011 - Mechanical supply and exhaust ventilation units (including heat recovery) for single family dwellings.

UNI EN 17192:2019 - It defines test methods and performance characteristics for rigid or semi-rigid non-metallic pipelines used for the ventilation and air conditioning of buildings.

STANDARDS FOR MEASURING SYSTEM PERFORMANCE*

UNI EN 15665:2009 - It defines the criteria for evaluating the performance of residential ventilation systems.

UNI EN 14134:2019 - It specifies the controls and measurement methods for assessing the suitability for purpose of ventilation systems installed in dwellings. It can be applied to the commissioning of new systems and to the performance testing of existing systems.

(*) ATTENTION

In some cases, the UNI EN 16798-3:2018 standard is improperly used as a reference.

This has replaced the UNI EN 13779:2008 standard. It applies to the design, the energy performance of buildings, and the installation of ventilation and air conditioning systems, and air conditioning of rooms of non-residential buildings occupied by people, excluding applications such as industrial processes. It focuses on the definition of the various parameters that are relevant to such systems.

ventilation units and energy recovery



AIR RECIRCULATION, HEAT RECOVERY, AND HIGH EFFICIENCY: VENTILATION UNITS ENSURE OPTIMAL ECONOMY OF OPERATION AND MANAGEMENT.

A ventilation unit makes it possible to **reciprocate the air** present inside rooms, such as offices, warehouses, halls, etc.


Thanks to these machines, it is possible to **recover the heat** that would be lost by simply opening the windows for natural air exchange.

Heat recovery allows energy **from the exhausted air** to be reused before it is expelled from the indoor environment.

The result is **great operating** economy that allows **high yields** and considerable savings.



Recovery unit 150/220 mc/h horizontal



Recovery unit 150/220 mc/h vertical



Recovery unit 300/400 mc/h horizontal



Recovery unit 300/400 mc/h vertical

air diffusion

DESIGN, TECHNOLOGY AND MATERIALS CERTIFIED FOR USE IN AIR DIFFUSION SYSTEMS

Thanks to its 30 years of experience, Airplast can guarantee a range of high-performance products, result of advanced studies and research into the best materials.

The diffusion plenums ensure perfect connection between the distribution pipelines and the air vents/grilles.


Each plenum is tightness-tested and checked for optimal coupling with the vents/grilles.

All plenums are made of antibacterial material, to ensure that the air passing through them is of the highest quality.

The vents/grilles are the result of continuous research and the development of new-generation materials.

The anti-condensation PVC is the distinguishing element of each product, and has optimal physical-chemical properties for the air distribution and diffusion sector.

Furthermore, Airplast was the first company to carry out tests (duly certified) on the antibacterial properties of PVC vents/grilles.

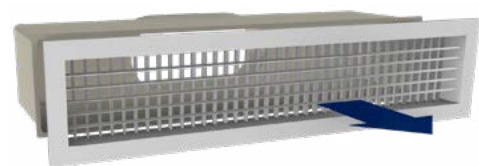


Customisation

Our range also includes polycarbonate and expanded polyisocyanurate (PAL) diffusion plenums for every requirement. The sizes and coupling diameters of the pipelines can also be customised.

We assemble the product in such a way that no welds are visible; at the same time, we also ensure the solidity of the frames by inserting non-visible supports that make them particularly robust. In this way, we can offer an aesthetically valuable product with the guarantee of healthiness provided by the intrinsic anti-fungal qualities of PVC.

The standard colour is RAL 9010, perfectly suited to the traditional paint used in residential and/or commercial premises.

The products carry the G PVC Compound mark as a guarantee of quality and sustainability of the PVC compound.

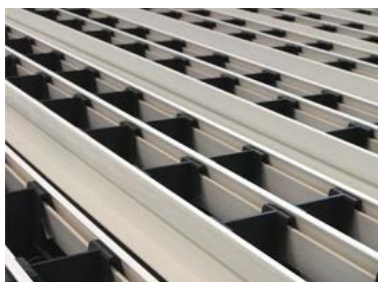

This label was created in order to protect the processing companies and the consumer, to promote quality in compliance with the regulations in force and to ensure operating methods that safeguard both health and the environment.

The use of the mark is subject to compliance with rules concerning the responsible use of additives, production of eco-friendly formulations, restriction of the use of certain substances, the obtaining of certifications and quality marks, minimisation of waste, and support, where managerially and economically possible, for regeneration or mechanical recycling activities.

**Slotted linear diffusers**

Slotted linear diffuser with directional nozzle terminals. Frame-surround plate made of anti-condensation PVC; directional nozzles and supports made of ABS.

antibacterial protection



A

A
Certified by
Sanitized AG

B

B
Certified by
HYGIENE-INSTITUT.



FOR BETTER INDOOR AIR QUALITY

FITT Agix® offers an innovative duct capable of ensuring a healthy environment. Its realisation is the result of a partnership between FITT and SANITIZED AG, the world's leading manufacturer of the hygienic antimicrobial function, which when integrated in the composition of the product inhibits the long-term growth of legionella, bacteria and mould.

Indoor environments can be at least twice as polluted as the outdoors, with a significant impact on the well-being and quality of life of those who spend time and live in them. FITT Agix® hoses treated with Sanitized® help to create a healthy environment, preventing the onset of allergies and asthma.

FITT Agix® with Sanitized® antimicrobial treatment guarantees a 99% reduction of the bacterial load commonly found on the internal surface of pipelines, preventing the formation of bacteria and fungi. The use of zinc pyrithione, a biocidal active ingredient, prevents the onset of bad odours.

The effectiveness of the hygienic function throughout the entire product life cycle has been tested at the Swiss Sanitized® laboratories for a wide range of pathogenic germs, including staphylococcus aureus, legionella pneumophila, pseudomonas aeruginosa and legionella pneumophila.

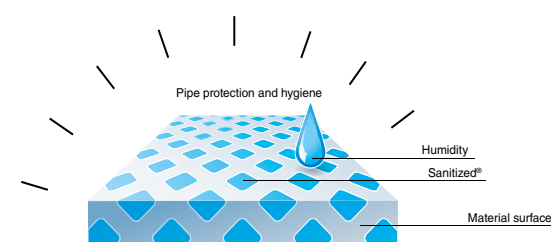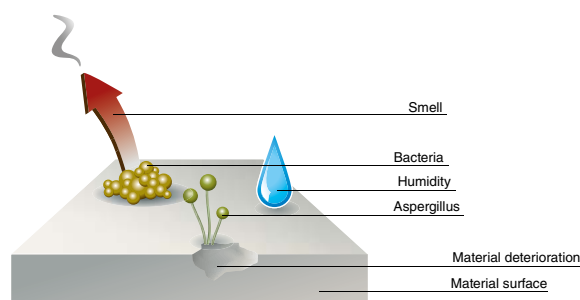

Test	Method	Percentage reduction	Certifying body
Antibacterial	ASTM E 2149-10	99.6 %	SANITIZED AG Switzerland
	ISO 22196:2007	99.9 %	
Antifungal	EN ISO 22196:2007	No fungal growth detected	ABCS srl Milano
Antistatic	INTERNAL METHOD	96 %	

CERTIFIED QUALITY

FITT Agix® has been developed in accordance with the most stringent regulations for ventilation and air conditioning systems. Product test reports from the renowned German Hygiene Institute HY confirm the compliance of the duct with the relevant standards.

ÖNorm H6021 (03/2020 | 03/2025)

Austrian law defining the methods and specifications for safeguarding the cleanliness of ventilation systems.

SWKI VA104-01 (03/2020 | 03/2025)

Standard issued by the Swiss Association of Civil Engineers which sets out the hygiene requirements for ventilation and air conditioning systems.

VDI 6022 (03/2020 | 03/2025)

Standard issued by the Association of German Engineers which sets out the hygiene requirements for ventilation and air conditioning systems.

ÖNorm H6038 (03/2020 | 03/2025)

Austrian standard providing guidelines for the design, installation, commissioning, operation and maintenance of ventilation systems.

Filtration

GENERAL CHARACTERISTICS

Filters are sorted by their capacity to purify air; this characteristic can be more or less accurate and indicates the type of filter.

Each filter has an ideal application in terms of maximum efficiency. Below we will define the types of filters according to the reference standards.

EN 779:2012

The previous applicable standard was the EN 779:2012, which defined the type of filter according to the particles being trapped: coarse, medium and fine.

The filters were then sorted according to the actual amount of particles the filter mesh was able to retain: each filter was in fact followed by a number, and the higher this number, the better the filtering capacity of the filter.




UNI EN 16890-1:2017

The current regulation (which entered into force on 23 March 2017), sets a particulate-based efficiency rating system (ePM) for general ventilation filters.

In fact, the standard indicates the type of particle that the filter model can trap, as well as the percentage of particles retained.

In the following table, the main filters are shown according to the previous and current regulations.

		Reference standards	Reference standards			
		EN 779:2012	UNI EN ISO 16890:2017			
		CLASSIFICATION				
GROUP	Coarse		Iso Coarse	ePM ₁₀	ePM _{2.5}	ePM ₁
		G1	40 %	n/a	n/a	n/a
		G2	60 %	n/a	n/a	n/a
		G3	80 %	n/a	n/a	n/a
	Medium	G4	90 %	n/a	n/a	n/a
		M5	n/a	50% to 55%	10% to 35%	5% to 20%
		M6	n/a	65% to 70%	50% to 55%	20% to 40%
	Fine	F7	n/a	80% to 85%	70% to 75%	60% to 65%
		F8	n/a	90% to 95%	80% to 85%	75% to 80%
		F9	n/a	95% to 100%	90% to 95%	85% to 90%

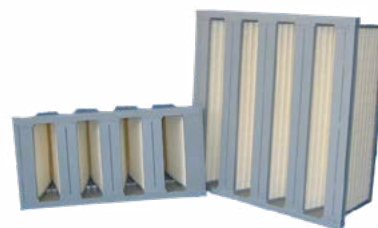

diffusion grilles

QUALITY AND DESIGN FOR AIR DIFFUSION

No longer cumbersome intake and extraction elements, but components that blend seamlessly with the interior design. The new Flat collection introduces a new way of interpreting the aesthetics of the air diffusion system, so that it can integrate perfectly with the design of the installation environment. The many available variants allow designers and architects to adapt the system to the style of the home, transforming air conditioning elements into elegant and discreet furnishing accessories.

Customisable versions allow HRV components to blend in seamlessly, giving the room designer full freedom of expression.

The new Flat range offers various customisations: from the clean and essential lines of the rectangular and square screens, available in white lacquered brushed stainless steel and glass versions, to the flush-to-the-wall screens, made of steel and offered in both white and brushed stainless steel versions.



Linear diffusion box with "Integra" range flat screen grille installed on the wall/false ceiling

**Indoor rectangular glass grille**

For the intake and extraction of air, it has a flat white or black back painted glass screen and aluminium frame.

several solutions in one

FITT Agix® cross offers even more powerful ventilation units with flow rates of up to 600/800 m³/h. The wide range allows for installation in larger residential dwellings, and even commercial and school premises.

The **FITT Agix® one** range includes 50 to 100 m³/h stand-alone recovery units, ideal when the installation of the whole centralised system is not feasible.

FITT Agix® mix offers solutions designed to integrate HRV systems with air distribution systems, and to manage the ambient conditions of each individual room in the home.



2

AIR SYSTEMS AND COMPONENTS

HRV


SEVERAL SOLUTIONS IN ONE

FITT VENTILATION SOLUTIONS


fitt agix® cross:

centralised hrv with heat recovery

GRAPHICS

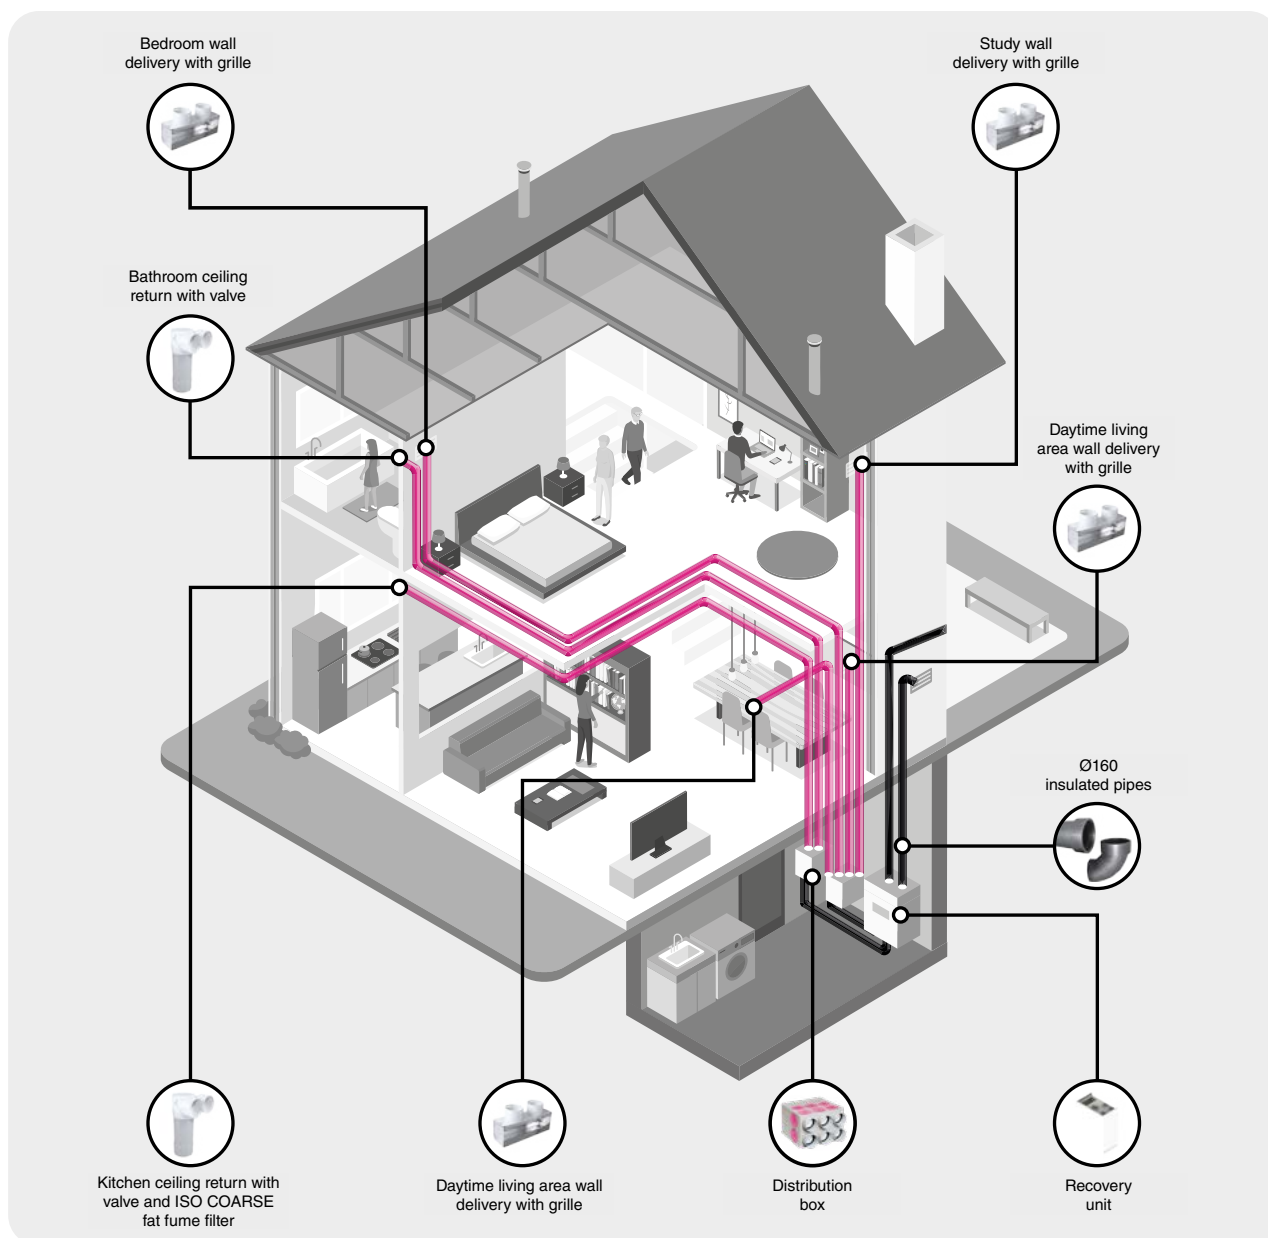

- | | | | |
|---|--|---|---|
| 1 | Maximum silence | 2 | High continuous air exchange capacity |
| 3 | System that can be perfectly integrated into living environments | 4 | Integrated, customisable and remotely manageable configurations |




LAYOUT DIAGRAM

- surface 100m²
- 3 bedrooms, 2 bathrooms, living room, kitchen
- 220 m³/h recovery unit
- recovery unit and distribution box installed in a technical compartment
- wall mounted delivery ports
- ceiling mounted suction vents
- Ø75mm hose

 Delivery flow

 Return flow

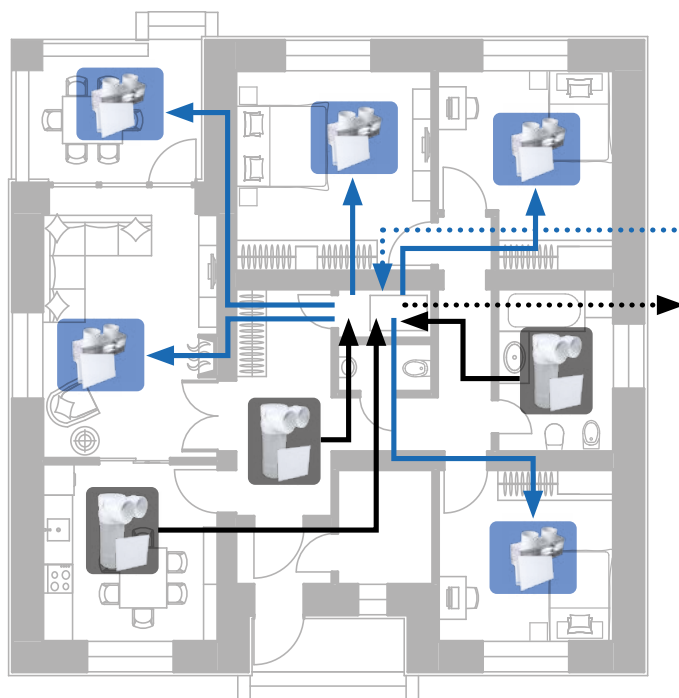


MATERIALS NEEDED FOR THE INSTALLATION OF THE SYSTEM



fitt agix® mix:

hrv and air distribution

GRAPHICS

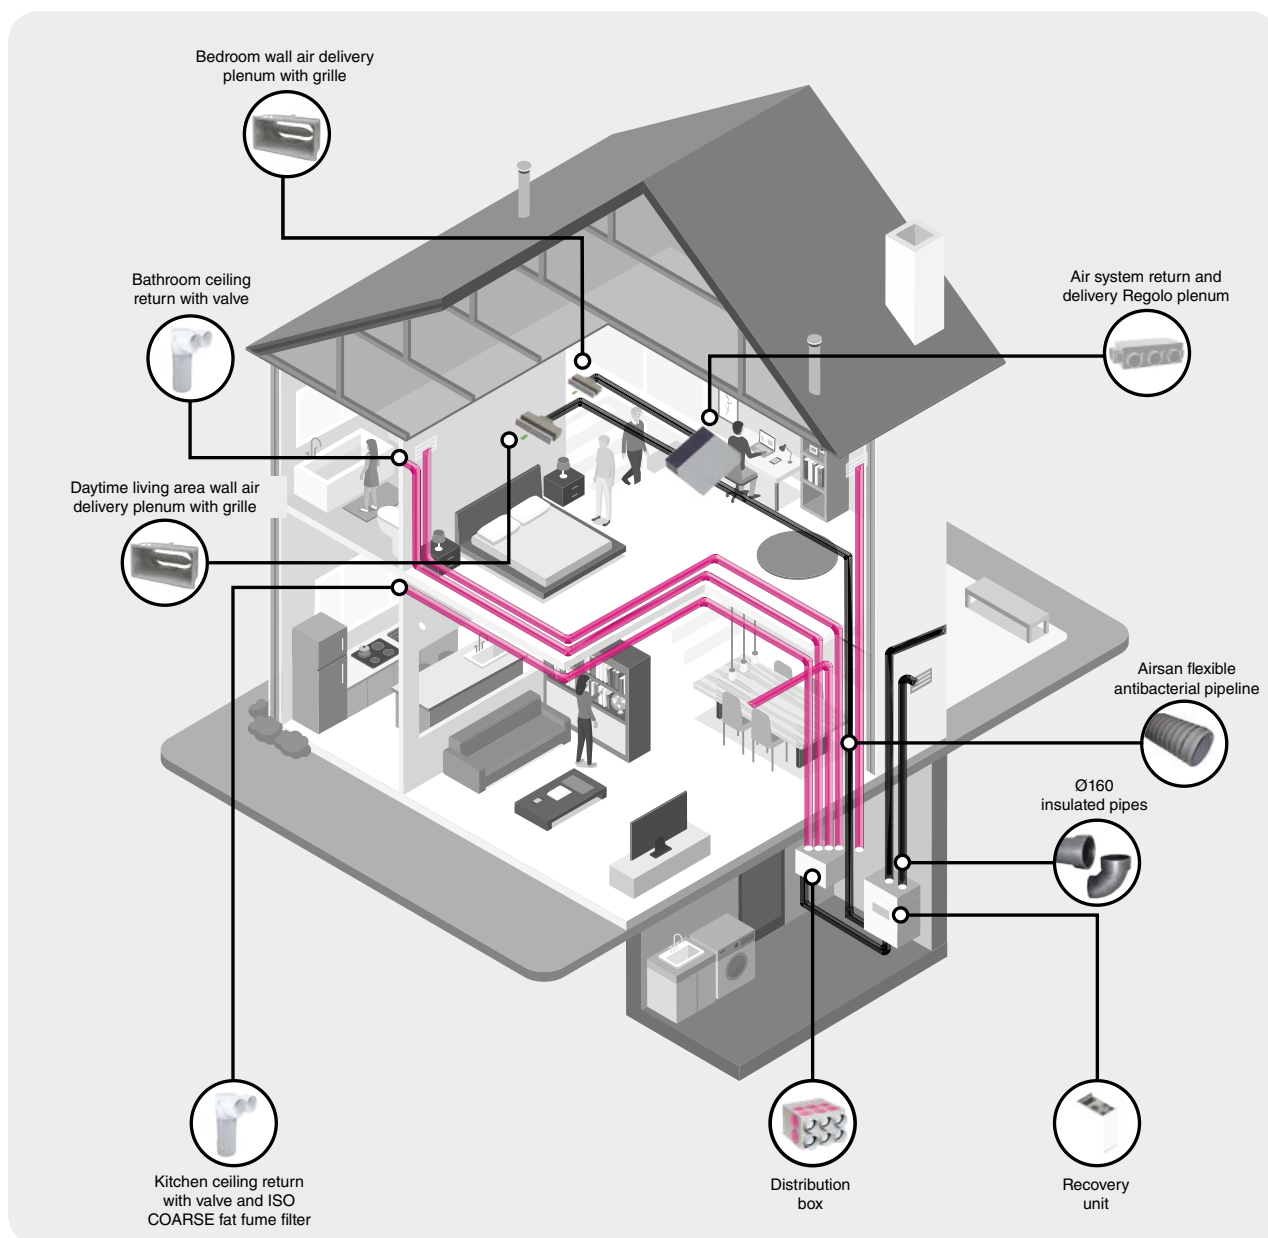


1 Perfect integration between HRV and air distribution system

2 High continuous air exchange capacity

3 Elegant design solutions for the wall and the ceiling

4 Zone management system, customisable configurations and remote coordination




LAYOUT DIAGRAM


- surface 100m²
- 3 bedrooms, 2 bathrooms, living room, kitchen
- 220 m³/h recovery unit
- recovery unit and air extraction box installed in a technical compartment
- Ø75mm air extraction hose
- indoor air conditioning unit
- AirMix system for air conditioning/HRV air delivery
- wall mounted delivery ports
- ceiling mounted suction vents

 Delivery flow

 Return flow

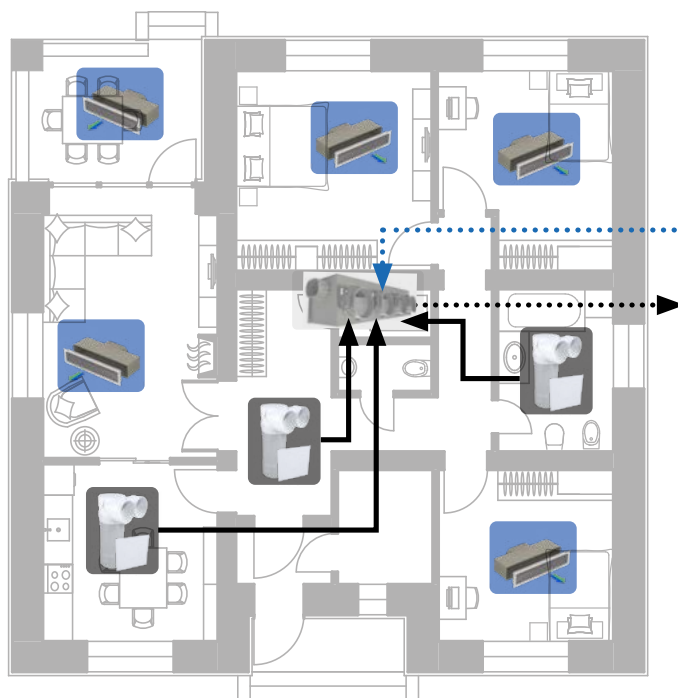


MATERIALS NEEDED FOR THE INSTALLATION OF THE SYSTEM

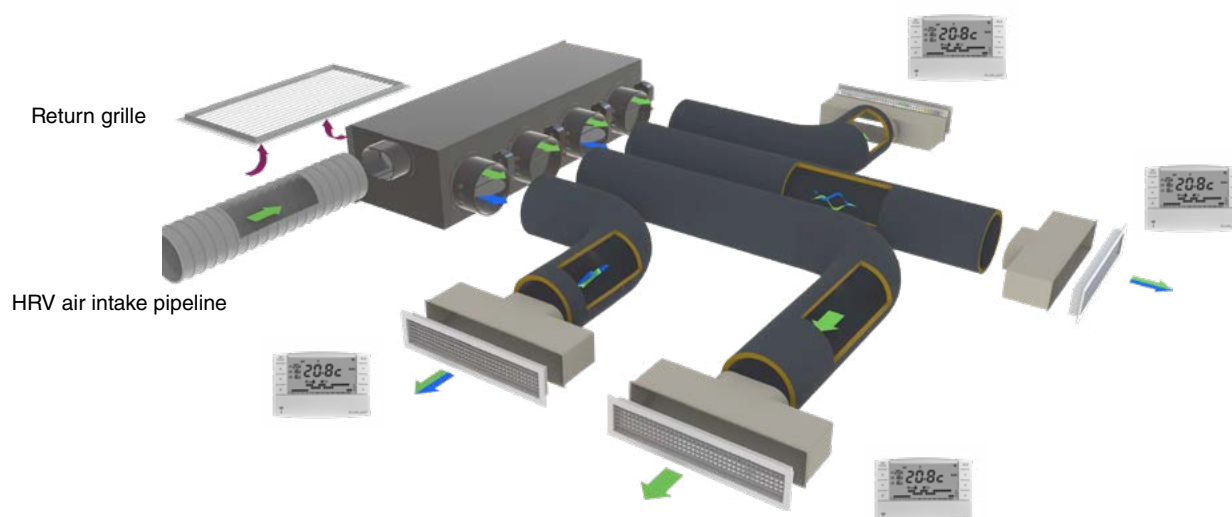

fitt agix® one: decentralized hrv

INFOGRAPHIC

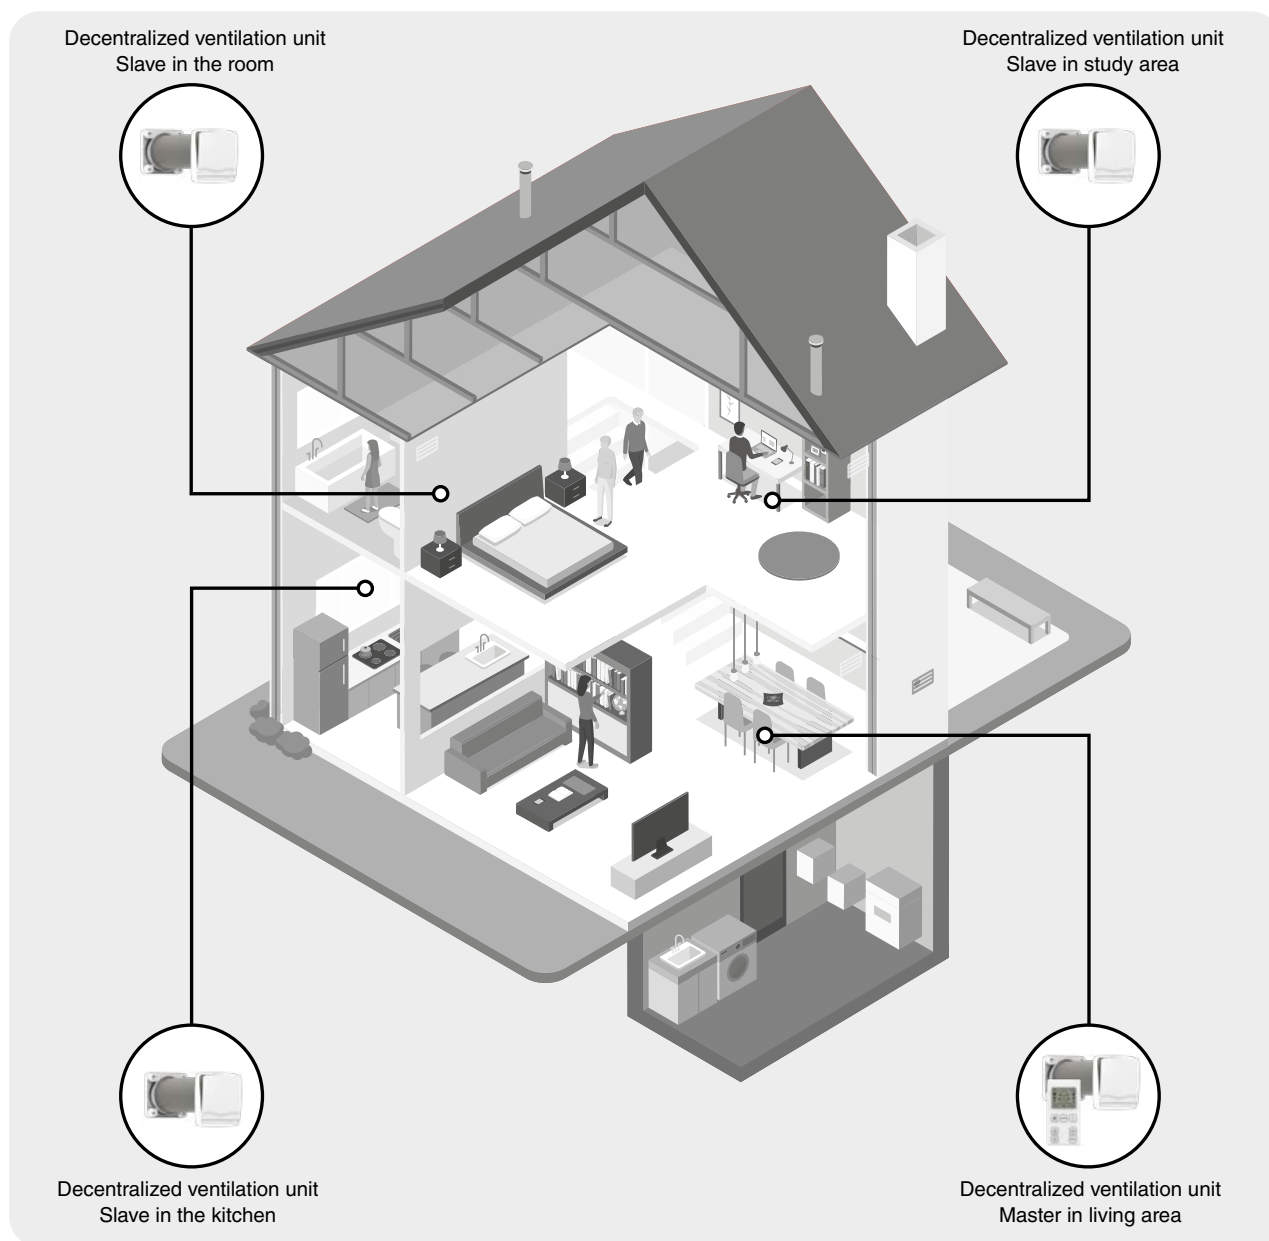


1 Quick installation and suitable for existing contexts

2 Ability to synchronize multiple units


3 Management of the entire system with a single wireless controller

4 Maximum possibility of management and integration into environments



LAYING SCHEME.

- area 70 square meters
- 2 bedrooms, 1 bathroom, living area, kitchen
- no. 1 recuperator 60mc/h master
- no. 4 recuperators 60mc/h slave

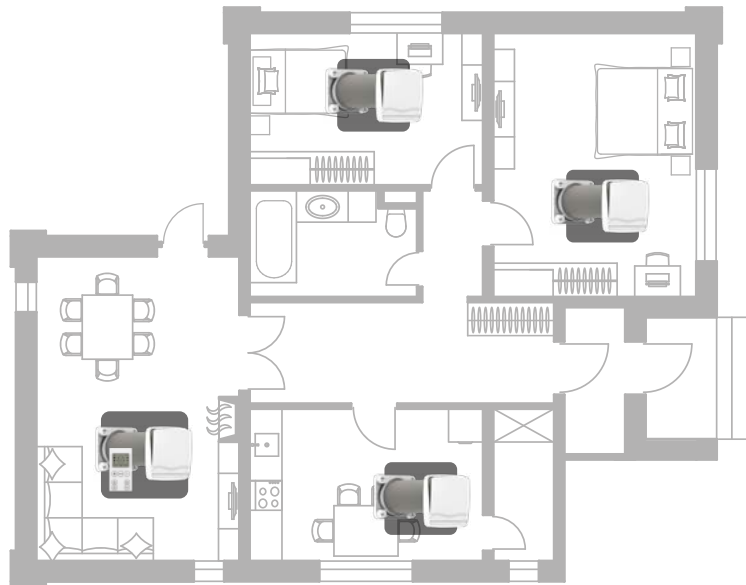

MATERIALS NEEDED FOR THE COMPOSITION OF THE SYSTEM



+



no. 1 recovery unit 60 mc/h master
+ Remote control command
(master version only)

no. 4 recovery units 60 mc/h slave

The background of the entire page is a dark, isometric illustration of a modern office or living space. It features a desk with a laptop and a person working, a round table with a lamp, a staircase, a dining table with chairs, and various indoor plants. The style is minimalist and architectural.

hrv

FITT Agix® is the ideal **Heat Recovery Ventilation** system for large, medium and small apartments (also for complete integration with the ceiling)



index

ventilation units

Decentralised HRV ventilation units with heat recovery



p. 34

Centralised HRV ventilating units with heat recovery



p. 42


air distribution

Outdoor grilles



p. 50

EPP pipes, silencers, flexible pipes



p. 52

Distribution boxes



p. 56

Semi-rigid pipes



p. 62

Airpiù system



p. 64

Adapters and "Flat" diffusers



p. 66

air conditioning/hrv distribution

Airbox sr, LINE-S and linear plenums



p. 78

HRV diffusers, plenums and grilles



p. 81

Ventilation valves



p. 83

airmix air conditioning-hrv

Airmix Smart Plenums




p. 84

fitt agix flat 30 decentralised recovery unit



DELOCALIZED WALL HEAT RECOVERY UNIT

Delocalized HRV unit designed for a simple and effective solution for heat recovery ventilation for individual rooms without ductwork.

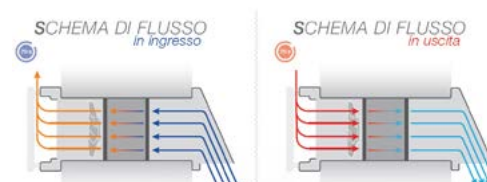

FITT AGIX FLAT 30 FEATURES

- Elegant design from both the inside (depth of only 4 cm) and outside;
- L=15 cm ceramic heat exchanger for increased performance;
- Fan positioned after the heat exchanger, facing outward, for quiet operation with alternating flows of 70 sec;
- External grille designed to reduce noise from outside;
- Beep signal and LED for signaling command acquisition;
- Master-Slave programming simplified by dip-switches;
- Class G3 filters;
- Ease of assembly;
- Easy maintenance without disassembling the wall unit;
- Inner cover included.

FEATURES AND FUNCTIONS OF THE MULTIFUNCTION REMOTE CONTROL (FOR DUO AND WIRELESS MODELS)

- Night function (5 m³/h) and 3 speed levels (10, 20, 30 m³/h);
- 3 humidity levels: 40%, 60%, 90%;
- Boost extraction function (timed for 20 min);
- Physical remote control lock/unlock key;
- Filter reset button;
- Device operation status information display;
- Touch buttons;

TECHNICAL SPECIFICATIONS

		FITT AGIX FLAT 30 BASIC PRO	FITT AGIX FLAT 30 DUO	FITT AGIX FLAT 30 WIRELESS	FITT AGIX FLAT 30 APP
Ventilation capacity [m ³ /h]		30	30	30	30
PVC pipeline	Ø [mm]	100	100	100	100
	length [mm]	500 (can be cut to 250 mm)			
Exchanger type		Ceramic	Ceramic	Ceramic	Ceramic
Operation		Alternating flows	Alternating flows	Alternating flows	Alternating flows
Master-Slave Connection		No	Cable	Wireless	APP
Command		Basic remote control	Remote control with multifunction display		SMARTPHONE
Night function and boost function for extraction		-	✓	✓	✓
On/off switch on board unit		✓	✓	✓	✓
Visual function indicator and filter cleaning		-	✓	✓	✓
Built-in twilight and hygrostat with 40%, 60%, 90% thresholds		-	✓	✓	✓
Speed levels		2: min and max	4: night + 3 speeds	4: night + 3 speeds	4: night + 3 speeds
Indoor unit H x W x D [mm]		250x233x42	250x233x42	250x233x42	250x233x42
Noise at min/max speed at 3 m [dB]		18/37	18/37	18/37	18/37
Power consumption at maximum speed [W]		6,9	6,9	6,9	6,9
Weight [kg]		4,3	4,3	4,3	4,3
Filter classification		G3	G3	G3	G3
Degree of protection		IPX4	IPX4	IPX4	IPX4




basic remote control for the BASIC PRO model

- ON/OFF: power on/off;
- V+: speed selection;
- V-: speed selection.



MULTIFUNCTION REMOTE CONTROL for DUO and WIRELESS models (included in delivery)

Night function (10 m³/h) and 3 speed levels (20, 40, 60 m³/h); 3 humidity levels: 40%, 60%, 90%; Boost extraction function (timed for 20 min); large display; touch buttons.



MASTER REMOTE PANEL

(optional) for DUO and WIRELESS models. Available in the following versions:

- Panel for DUO unit
- Panel+CO₂ for DUO unit
- Panel for WIRELESS unit
- Panel+CO₂ for WIRELESS unit

FITT AGIX FLAT 30

Code	Description
VMA30-FLAT-B1	FITT AGIX FLAT 30 BASIC PRO - BASIC REMOTE CONTROL
VMA30-FLAT-D	FITT AGIX FLAT 30 DUO - night + 3 speeds MULTIFUNCTION REMOTE CONTROL - Master/Slave via cable
VMA30-FLAT-W	FITT AGIX FLAT 30 WIRELESS - night + 3 speeds MULTIFUNCTION REMOTE CONTROL - Wireless Master/Slave
VMA30-FLAT-APP	FITT AGIX FLAT 30APP with smartphone app

The WIRELESS version is equipped with:

- Wireless communication between units;
- Remote control with display included;
- Built-in humidity sensor and twilight sensor, enabling various automatic operation modes (see remote control);
- Ability to manage up to 16 units within a system in master/slave mode, with simple configuration via dip switches;
- 4 settable speeds (including 1 night speed).

The APP version is equipped with:

- Communication via WiFi between the units;
- Ability to control the units from smartphones with the Air.app even remotely;
- Built-in humidity, twilight, temperature and VOC sensors that enable various automatic operation modes;
- SMART mode that allows comparison of indoor and outdoor air quality data by connecting to the nearest weather station by which the product will automatically adjust;
- Ability to configure up to 16 units within the system via APP;
- 4 settable speeds (including 1 night speed).

ACCESSORIES


Code	Description	Suitable for
VMA30FILTERS	Kit no. 4 honeycomb filters	FITT AGIX FLAT 30 BASIC PRO / DUO / WIRELESS / APP (replacement)
VMA36-FLAT-DP	MASTER Remote Panel	FITT AGIX FLAT 30/60 - DUO
VMA36-FLAT-DPCO	MASTER remote panel + CO ₂ sensor	FITT AGIX FLAT 30/60 - DUO
VMA36-FLAT-WP	MASTER Remote Panel	FITT AGIX FLAT 30/60 - WIRELESS
VMA36-FLAT-WPCO	MASTER remote panel + CO ₂ sensor	FITT AGIX FLAT 30/60 - WIRELESS
VMGRESIR100	External folding grate DN100	FITT AGIX FLAT 30 BASIC PRO / DUO / WIRELESS / APP

fitt agix flat 60 decentralised recovery unit



DELOCALIZED WALL HEAT RECOVERY UNIT

Delocalized HRV unit designed for a simple and effective solution for heat recovery ventilation for individual rooms without ductwork.

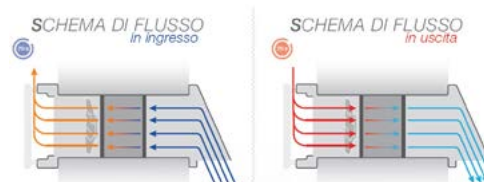

FITT AGIX FLAT 60 FEATURES

- Elegant design from both the inside (depth of only 4 cm) and outside;
- Ceramic heat exchanger L=15 cm;
- Fan positioned after the exchanger for quiet operation with alternating flows of 70 sec;
- External grille designed to reduce noise from outside;
- Beep signal and LED for signaling command acquisition;
- Master-Slave programming simplified by dip-switches;
- Ease of assembly and maintenance;
- Inner cover included

TECHNICAL SPECIFICATIONS

	FITT AGIX FLAT 60 BASIC PRO	FITT AGIX FLAT 60 DUO	FITT AGIX FLAT 60 WIRELESS	FITT AGIX FLAT 60 APP
Ventilation capacity [m³/h]	60	60	60	60
PVC pipeline Ø [mm] (included) length [mm]	160	160	160	160
	500 (can be cut to 250 mm)			
Exchanger type	Ceramic	Ceramic	Ceramic	Ceramic
Operation	Alternating streams of 70 sec.	Alternating streams of 70 sec.	Alternating streams of 70 sec.	Alternating streams of 70 sec.
Master-Slave Connection	No	Cable	Wireless	App
Command	Basic remote control	Remote control with multifunctional display		Smartphone
Night function and timed boost function for air extraction	-	✓	✓	✓
On/off switch on board unit	✓	✓	✓	✓
Visual function indicator and filter cleaning	-	✓	✓	✓
Built-in twilight and hygrostat with 40%, 60%, 90% thresholds	-	✓	✓	✓
Speed levels	2: min and max	4: night + 3 speeds	4: night + 3 speeds	4: night + 3 speeds
Indoor unit A (height) x W (width) x D (depth) [mm].	250x230x40	250x230x40	250x230x40	250x230x40
Noise at min/max speed at 3 m [dB].	9/30	9/30	9/30	9/30
Power consumption at maximum speed [W]	6,7	6,7	6,7	6,7
Weight [kg]	4,3	4,3	4,3	4,3
Filter classification	G3	G3	G3	G3
Degree of protection	IPX4	IPX4	IPX4	IPX4

FITT AGIX FLAT 60

Code	Description
VMA60-FLAT-B1	FITT AGIX FLAT 60 BASIC PRO - Basic Remote Control
VMA60-FLAT-D	FITT AGIX FLAT 60 DUO - night + 3 speeds MULTIFUNCTION REMOTE CONTROL- Master/Slave via cable
VMA60-FLAT-W	FITT AGIX FLAT 60 WIRELESS - night + 3 speeds MULTIFUNCTION REMOTE CONTROL - Wireless Master/Slave
VMA60-FLAT-APP	FITT AGIX FLAT 60 APP with smartphone application



basic remote control for the BASIC PRO model

- ON/OFF: power on/off;
- V+: speed selection;
- V-: speed selection.



MASTER REMOTE PANEL

(optional) for DUO and WIRELESS MODELS.

Available in the following versions:

- Panel for DUO UNIT
- Panel+CO2 for DUO UNIT
- Panel for WIRELESS UNIT
- Panel+CO2 for WIRELESS UNIT



MULTIFUNCTION REMOTE CONTROL for DUO and WIRELESS models (included in delivery)

Night function (10 m³/h) and 3 speed levels (20, 40, 60 m³/h); 3 humidity levels: 40%, 60%, 90%; Boost extraction function (timed for 20 min); large display; touch buttons.





SILENCER

Silencer for installation inside the recuperator pipe, made of polyester fiber certified for nonproliferating air duct bacteria coated at both ends with polyethylene foam film. It is to be inserted by hand under pressure inside the pipeline of FITT AGIX FLAT 60 near the outer grid without the need for the use of adhesives. In tests performed on a 60-cm-long bare pipe, with the indoor noise base of about 32 dB(A), artificially created outdoor noise of about 60 dB(A), a noise abatement of about 9 dB(A) was found.



POLYSTYRENE PREDICING Provision of template, made of sintered expanded polystyrene, within the masonry for subsequent installation of piping for the heat recovery unit. Leaving the cylindrical part on the inside, the arrangement should be inserted perfectly "in bubble" inside the masonry, taking care to place the side marked as "inside" toward the interior of the room, so as to have the other side toward the outside that allows condensation to drain outside due to the effect of the slope.



EXTERNAL GRID EXTENSIONS PVC extensions in RAL7035 color (painted by the customer) for support of the external grille, which can be used if the wall thickness is less than 25 cm (minimums required for the installation of the heat recovery unit), available in depths of 5 cm and 10 cm. A set for attaching the extension to the wall and the outer grill of the recuperator to the extension is supplied with each extension.



LOWERED JAMB KIT

Solution designed for corner installation on jamb. Avoids the presence in the facade of the grill greatly limiting the aesthetic impact, decreases the noise from outside, provides the possibility of access to the outdoor grill even without the presence of the terrace.



ACCESSORIES

Code	Description	Suitable for
VMA60TI500	Preparation tube Ø160 L=500 mm	FITT AGIX FLAT 60 and PANEL60
VMA60TI700	Preparation pipe Ø160 L=700 mm	FITT AGIX FLAT 60 and PANEL60
VMA60-FLATPRE	Polystyrene arrangement (light blue color)	FITT AGIX FLAT 60 and PANEL60
VMA60-FLATSIL	Silencer for pipe 160 made of PET-coated polyester fiber.	FITT AGIX FLAT 60 and PANEL60
VMKSA60-FLAT2	Jamb installation kit (lowered type)	FITT AGIX FLAT 60 and PANEL60
VMA60FILTERS	Kit no. 4 honeycomb filters	FITT AGIX FLAT 60 and PANEL60
VMGRESIR160	Foldable outdoor grille quick installation from inside	FITT AGIX FLAT 60 and PANEL60
VMGAIR160A60	External grid with collar Ø160	FITT AGIX FLAT 60 and PANEL60
VMA60-FLATPRO5	5 cm wall extension for outdoor grill	FITT AGIX FLAT 60 and PANEL60
VMA60-FLAT-PRO1	10 cm wall extension for outdoor grill	FITT AGIX FLAT 60 and PANEL60
VMA36-FLAT-DP	MASTER Remote Panel	FITT AGIX FLAT 30/60 - DUO
VMA36-FLAT-DPCO	MASTER remote panel + CO ₂ sensor	FITT AGIX FLAT 30/60 - DUO
VMA36-FLAT-WP	MASTER Remote Panel	FITT AGIX FLAT - WIRELESS / PANEL--W
VMA36-FLAT-WPCO	MASTER remote panel + CO ₂ sensor	FITT AGIX FLAT - WIRELESS / PANEL--W

fitt agix panel 60 decentralised recovery unit



DECENTRALIZED ALTERNATING-FLOW HEAT RECUPERATOR

- Motor fan placed after the exchanger, inside the wall, to make the product highly silent;
- High-efficiency heat exchanger (up to 93%) made of ceramic material;
- Constructed of durable, high-quality and aesthetically pleasing materials;
- Front cover made of ABS and outer grille made of ASA, a noble material that resists UV, heat, shock and aging, making it perfectly suitable for outdoor use;

- Equipped with a high-tight tilting front to prevent unwanted air re-entry when the product is turned off;
- Possibility of embedding the product with the embedding KIT included in the package;
- External grille designed to minimize noise from outside;
- Minimum wall depth 250 mm for the external wall version and 300 mm for the built-in version - maximum recommended depth 3 mt (2.5 mt if a 90° bend is present);
- DC motor fan on ball bearings with low power consumption and long service life;
- Ease of maintenance and cleaning;
- Double washable dust filter easily accessible for maintenance;
- IPX4 degree of protection;
- LED visual indicators for command reception and filter cleaning;
- Humidity sensor and twilight sensor;
- Remote control included in delivery;
- It does not require condensate drainage;
- Operating temperature: - 30°C + 50°C;
- Ability to replace the standard filter with optional filters;
- Available in versions: - WIRELESS (wireless connection); - APP (connection via APP for smartphones);

LOCATION: Panel is designed to be installed in any room of the house. With synchronization technology, the products will communicate with each other in a way that achieves maximum efficiency.

TECHNICAL SPECIFICATIONS

	FITT AGIX PANEL 60 WIRELESS	FITT AGIX PANEL 60 APP
Duct Ø [mm] (included)	160	160
Voltage [Volts]	220-240	220-240
Frequency [Hz]	50	50
"IN" flow rate max [m³/h]	60	60
Max "OUT" flow rate [m³/h]	60	60
Command	Multifunction remote control	Smartphone
Master Slave connection	Wireless	APP for Smartphone
Power [W]	6,6	6,6
Noise level [dB(A)3m]	25	25
Weight [kg]	5,3	5,3



FITT AGIX PANEL 60

Code	Description
VMPANEL60-W	FITT AGIX PANEL 60 WIRELESS
VMPANEL60-APP	FITT AGIX PANEL 60 APP with Smartphone Application

ACCESSORIES

Code	Description
VMA36-FLAT-WP	Remote "Master" Panel for Wireless version
VMA36-FLAT-WPCO	"Master" remote panel for Wireless + CO ₂ sensor version

The WIRELESS version is equipped with:

- Wireless communication between units;
- Remote control with display included;
- Built-in humidity sensor and twilight sensor, enabling various automatic operation modes (see multifunction remote control);
- Ability to manage up to 16 units within a system in master/slave mode, with simple configuration via dip switches;
- 4 settable speeds (including 1 night speed).

The APP version is equipped with:

- Communication via WiFi between the units;
- Ability to control the units from smartphones with the Air.app even remotely;
- Built-in humidity, twilight, temperature and VOC sensors that enable various automatic operation modes;
- SMART mode that allows comparison of indoor and outdoor air quality data by connecting to the nearest weather station by which the product will automatically adjust;
- Ability to configure up to 16 units within the system via APP;
- 4 settable speeds (including 1 night speed).

Possibility of both external wall and recessed installation with the special recessed KIT included in the package.

**ACCESSORIES**

Code	Description	Suitable for
VMA60TI500	Preparation pipe Ø160 L=500 mm	FITT AGIX FLAT 60 and PANEL60
VMA60TI700	Preparation pipe Ø160 L=700 mm	FITT AGIX FLAT 60 and PANEL60
VMA60-FLATPRE	Polystyrene arrangement (light blue color)	FITT AGIX FLAT 60 and PANEL60
VMA60-FLATSIL	Silencer for pipe Ø160 made of PET-coated polyester fiber	FITT AGIX FLAT 60 and PANEL60
VMKSA60-FLAT2	Jamb installation kit (lowered type)	FITT AGIX FLAT 60 and PANEL60
VMA60FILTERS	Kit no.4 honeycomb filters	FITT AGIX FLAT 60 and PANEL60
VMGRESIR160	Foldable outdoor grille quick installation from inside	FITT AGIX FLAT 60 and PANEL60
VMGAIR160A60	External grid with collar Ø160	FITT AGIX FLAT 60 and PANEL60
VMA36-FLAT-WP	MASTER Remote Panel	FITT AGIX FLAT - WIRELESS / PANEL--W
VMA36-FLAT-WPCO	MASTER remote panel + CO ₂ sensor	FITT AGIX FLAT - WIRELESS / PANEL--W

fitt agix panel 100 decentralised recovery unit



DECENTRALIZED ALTERNATING-FLOW HEAT RECUPERATOR

- Motor fan placed after the exchanger, inside the wall, to make the product highly silent;
- High-efficiency heat exchanger (up to 93%) made of ceramic material;
- Constructed of durable, high-quality and aesthetically pleasing materials;
- Front cover made of ABS and outer grille made of ASA, a noble material cheresistant to UV rays, heat, shock, and aging, and thus perfectly suited for outdoor use;

- Equipped with a high-tight tilting front to prevent undesired air re-entry when the product is turned off;
- Possibility of embedding the product with the embedding KIT included in the package;
- External grille designed to minimize noise from outside;
- Minimum wall depth 250mm for the external wall version and 300mm for the built-in version - maximum recommended depth 3mt (2.5mt if a 90° bend is present);
- DC motor fan on ball bearings with low power consumption and long service life;
- Ease of maintenance and cleaning;
- Double washable dust filter easily accessible for maintenance;
- IPX4 degree of protection;
- LED visual indicators for command reception and filter cleaning;
- Humidity sensor and twilight sensor;
- Remote control included in delivery;
- Does not require condensate drainage;
- Operating temperature: - 30°C + 50°C;
- Ability to replace the standard filter with optional filters;
- Available in versions:- PANEL WIRELESS (wireless connection) - PANEL APP (connection via APP for smartphones);

LOCATION: Panel is designed to be installed in any room of the house. With synchronization technology, products will communicate with each other for maximum efficiency

NB: Pipe Ø 200 mm excluded from delivery

TECHNICAL SPECIFICATIONS

	FITT AGIX PANEL100 WIRELESS	FITT AGIX PANEL100 APP
Duct Ø [mm] excluded	200	200
Voltage [Volts]	220-240	220-240
Frequency [Hz]	50	50
"IN" flow rate [m³/h]	100	100
"OUT" flow rate [m³/h]	100	100
Command	Multifuction remote control	APP for Smartphone
Master Slave connection	Wireless	APP
Power [W]	11,9	11,9
Noise level [dB(A)3m]	32	32
Weight [kg]	6,4	6,4



PANEL 100

Code	Description
VMPANEL100-W	FITT AGIX PANEL100 WIRELESS
VMPANEL100-APP	FITT AGIX PANEL100 with APP for Smartphone

ACCESSORIES

Code	Description
VMA36-FLAT-WP	Remote "Master" Panel for Wireless version
VMA36-FLAT-WPCO	"Master" remote panel for Wireless + CO ₂ sensor version

The WIRELESS version is equipped with:

- Wireless communication between units;
- Remote control with display included;
- Built-in humidity sensor and twilight sensor, enabling various automatic operating modes (see multifunction remote control);
- Ability to manage up to 16 units within a system in master/slave mode, with simple configuration via dip switches;
- 4 settable speeds (including 1 night speed).

The APP version is equipped with:


- Communication via WiFi between the units;
- Ability to control the units from smartphones with the Air.app even remotely;
- Built-in humidity, twilight, temperature and VOC sensors that consent various automatic operation modes;
- SMART mode that allows comparison of indoor and outdoor air quality data by connecting to the nearest weather station by which the product will automatically adjust;
- Ability to configure up to 16 units within the system via APP;
- 4 settable speeds (including 1 night speed).

Possibility of both external wall and recessed installation with the special recessed KIT included in the package.

**ACCESSORIES**

Code	Description	Suitable for
VMPAN100T1500	Preparation pipe Ø200 L=500 mm	FITT AGIX PANEL100
VMPAN100T1700	Preparation pipe Ø200 L=700 mm	FITT AGIX PANEL100

fitt agix cross 150 recovery unit



Recovery unit 150 mc/h - e.g. horizontal installation

Recovery unit 150 mc/h - e.g. vertical installation

Code		VMAG-150PS
Fans		
Fan Type	-	Forward-bladed centrifugal - directly coupled brushless electronic motor
Number Fans	No.	2
Air flow rate	mc/h	140
Useful pressure	Pa	100
Heat exchanger (UNI EN 13141-7, temp. int. 20°C, humidity int. 28%, temp. est. 7°C, humidity est. 72%)		
Exchanger type	-	countercurrent plates polypropylene material
Number of Exchangers	No.	1
Recovery efficiency	%	85,2
Filters		
Type of filters	-	flat filters
Filtration class	-	ePM1 80%
Acoustic data (UNI EN 3741 and UNI EN 3744)		
Sound power Lw transmitted by the structure	dB(A)	49
Sound power Lw radiated into the channel	dB(A)	54
Average sound pressure Lp at 1m	dB(A)	42,1
Average sound pressure Lp at 3m	dB(A)	34,7
Electrical data		
Supply voltage	V	230 / 1 / 50 Hz
Absorbed current	A	0,8
Power consumption	W	95
Degree of protection	IP	IPX0



CONTROL PANEL INCLUDED

Removable panel for mounting on 502-503 box or wall.

Speed, temperature and mode control.


Maximum connection length 50m if made with 4-wire braided shielded cable.

Wifi control for management via smartphone or tablet and dedicated APP.




Prepared for both horizontal and vertical installation

Horizontal ceiling installation dimensions

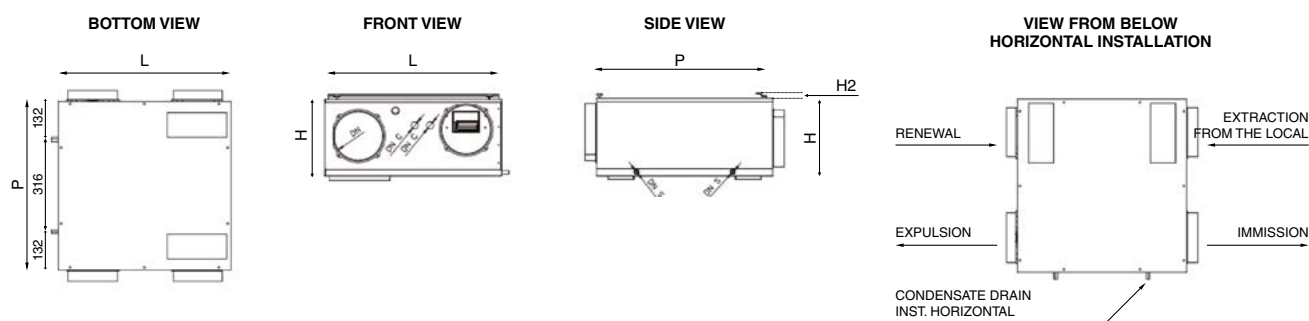

Width L	mm	580
Depth P	mm	580
Height H	mm	255
H2 bracket height	mm	16
Air diameter DN	Ø	160
Condensate drain diameter DN S	mm	12
Cable diameter DN S	mm	16
Weight	Kg	19

Vertical wall installation dimensions

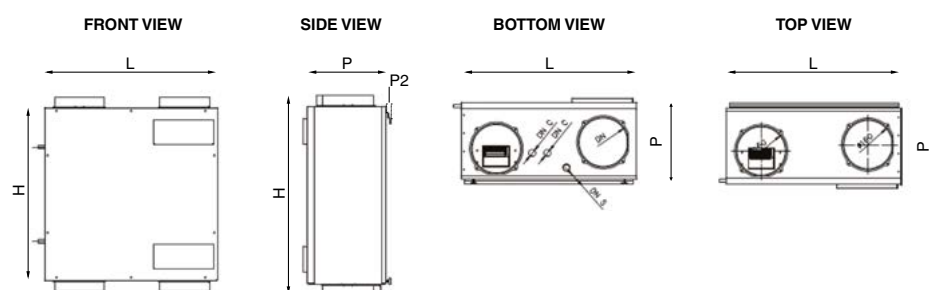


Width L	mm	580
Depth P	mm	255
Height H	mm	580
P2 bracket depth	mm	16
Air diameter DN	Ø	160
Condensate drain diameter DN S	mm	20
Cable diameter DN S	mm	16
Weight	Kg	19



ACCESSORIES

Code	Description
VMAG-KF9-1522	FITT Agix® filters ePM1 80% (2 pcs. kit) for 150/220 horizontal and vertical units

fitt agix cross 220 recovery unit



Recovery unit 220 mc/h - e.g. horizontal installation

Recovery unit 220 mc/h - e.g. vertical installation

Code		VMAG-220PS
Fans		
Fan Type	-	forward-bladed centrifugal - directly coupled brushless electronic motor
Number Fans	No.	2
Air flow rate	mc/h	190
Useful pressure	Pa	100
Heat exchanger (UNI EN 13141-7, temp. int. 20°C, humidity int. 28%, temp. est. 7°C, humidity est. 72%)		
Exchanger type	-	countercurrent plates polypropylene material
Number of Exchangers	No.	1
Recovery efficiency	%	81,1
Filters		
Type of filters	-	flat filters
Filtration class	-	ePM1 80%
Acoustic data (UNI EN 3741 and UNI EN 3744)		
Sound power Lw transmitted by the structure	dB(A)	51
Sound power Lw radiated into the channel	dB(A)	56
Average sound pressure Lp at 1m	dB(A)	43,8
Average sound pressure Lp at 3m	dB(A)	36,0
Electrical data		
Supply voltage	V	230 / 1 / 50 Hz
Absorbed current	A	1,2
Power consumption	W	130
Degree of protection	IP	IPX0



CONTROL PANEL INCLUDED

Removable panel for mounting on 502-503 box or wall.

Speed, temperature and mode control.


Maximum connection length 50m if made with 4-wire braided shielded cable.

Wifi control for management via smartphone or tablet and dedicated APP.




Prepared for both horizontal and vertical installation

Horizontal ceiling installation dimensions

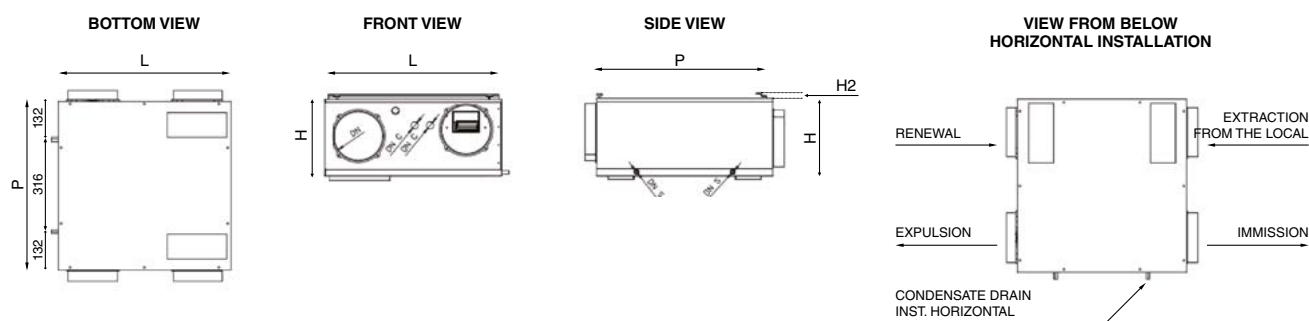

Width L	mm	580
Depth P	mm	580
Height H	mm	255
H2 bracket height	mm	16
Air diameter DN	Ø	160
Condensate drain diameter DN S	mm	12
Cable diameter DN S	mm	16
Weight	Kg	19

Vertical wall installation dimensions

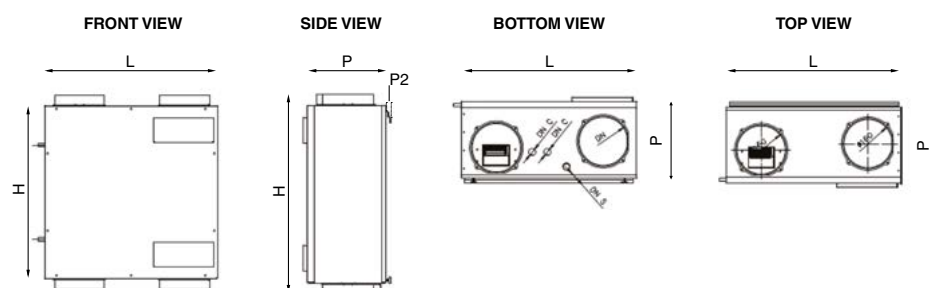

Width L	mm	580
Depth P	mm	255
Height H	mm	580
P2 bracket depth	mm	16
Air diameter DN	Ø	160
Condensate drain diameter DN S	mm	20
Cable diameter DN S	mm	16
Weight	Kg	19



ACCESSORIES

Code	Description
VMAG-KF9-1522	FITT Agix® filters ePM1 80% (2 pcs. kit) for 150/220 horizontal and vertical units

fitt agix cross 300 recovery unit



VMAG-300S23 recovery unit horizontal only




VMAG-300 recovery unit vertical only

Code		VMAG-300S23	VMAG-300
Model		horizontal	vertical
Fans			
Type of Fans	-	Radial backward blade - directly coupled brushless electronic motor - 0/10 V signal	
Number Fans	No.	2	2
Air flow rate	mc/h	306	295
Useful pressure	Pa	100	100
Heat exchanger (Data referred to UNI EN 13141-7, temp. int. 20°C, humidity int. 28%, temp. est. 7°C, humidity est. 72%)			
Exchanger type	-	countercurrent plates - polypropylene material	
Number of Exchangers	No.	1	1
Recovery efficiency	%	85	82
Filters			
Type of filters	-	flat filters	flat filters
Filtration class	-	ePM1	ePM1
Acoustic data (UNI EN 3741 and UNI EN 3744)			
Sound pressure at 3 m	dB(A)	41	41.5
Electrical data			
Supply voltage	V	230 / 1 / 50 Hz.	230 / 1 / 50 Hz.
Absorbed current	A	1.6	1.6
Power consumption	W	170	170
Degree of protection	IP	44	44


CONTROL PANEL included

Panel for mounting on 502-503 box or wall. Speed, temperature and mode control.
Maximum connection length 50m if made with 4-wire braided shielded cable.
Wifi control for management via smartphone or tablet and dedicated APP.



Prepared for horizontal and vertical installation on ceiling and wall


Dimensions horizontal ceiling installation VMAG-300S23

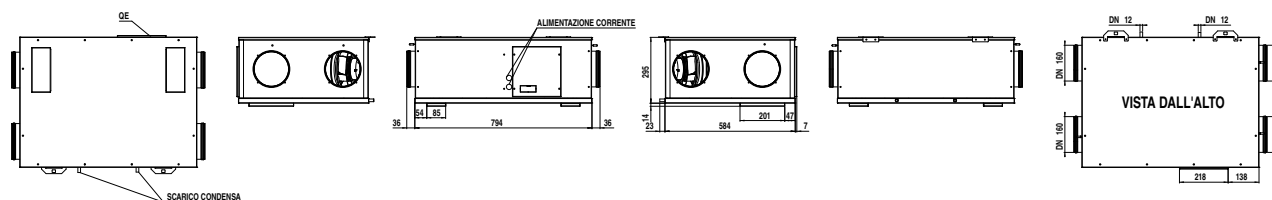

Width A	mm	790
Depth B	mm	590
Height C	mm	300
DN diameter	Ø	160
A1	mm	30
B1	mm	30
B2	mm	300
C1	mm	300
Weight	Kg	30
Condensate	Ø	12

N.B.: dimensions refer to the unit as seen from above

VMAG-300 Vertical Installation Dimensions

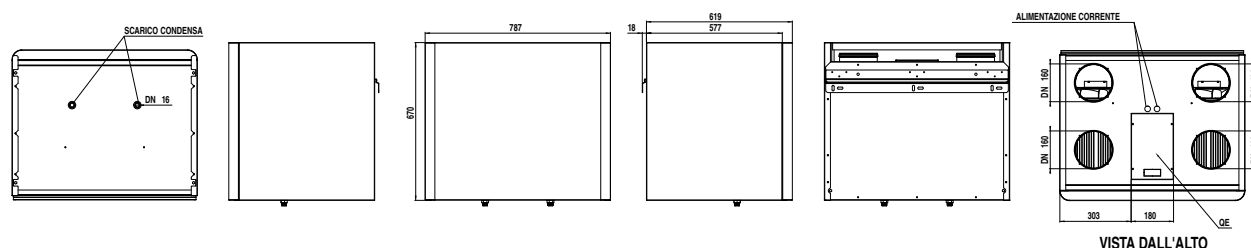

Width A	mm	790
Depth B	mm	640
Height C	mm	670
DN diameter	Ø	160
A1	mm	50
B1	mm	300
C1	mm	500
Weight	Kg	38
Condensate	Ø	20



ACCESSORIES

Code	Description
VMAG-KF9-3040	FITT Agix® filters ePM1 80% (2 pcs. kit) for 300/400 horizontal and vertical units

fitt agix cross 400 recovery unit



VMAG-400S23 recovery unit horizontal only




VMAG-400 recovery unit vertical only

Code		VMAG-400S23	VMAG-400
Model		horizontal	vertical
Fans			
Type of Fans	-	Radial backward blade - directly coupled brushless electronic motor - 0/10 V signal	
Number Fans	No.	2	2
Air flow rate	mc/h	375	375
Useful pressure	Pa	100	100
Heat exchanger (Data referred to UNI EN 13141-7, temp. int. 20°C, humidity int. 28%, temp. est. 7°C, humidity est. 72%)			
Exchanger type	-	countercurrent plates - polypropylene material	
Number of Exchangers	No.	1	1
Recovery efficiency	%	87.6	87
Filters			
Type of filters	-	flat filters	flat filters
Filtration class	-	ePM1	ePM1
Acoustic data (UNI EN 3741 and UNI EN 3744)			
Sound pressure at 3 m	dB(A)	42.6	38.4
Electrical data			
Supply voltage	V	230 / 1 / 50 Hz.	230 / 1 / 50 Hz.
Absorbed current	A	1.6	1.6
Power consumption	W	170	170
Degree of protection	IP	44	44


CONTROL PANEL INCLUDED

Removable panel for mounting on 502-503 box or wall.
 Speed, temperature and mode control.
 Maximum connection length 50m if made with 4-wire braided shielded cable.
 Wifi control for management via smartphone or tablet and dedicated APP.



Prepared for horizontal and vertical installation on ceiling and wall


Dimensions horizontal ceiling installation VMAG-400S23

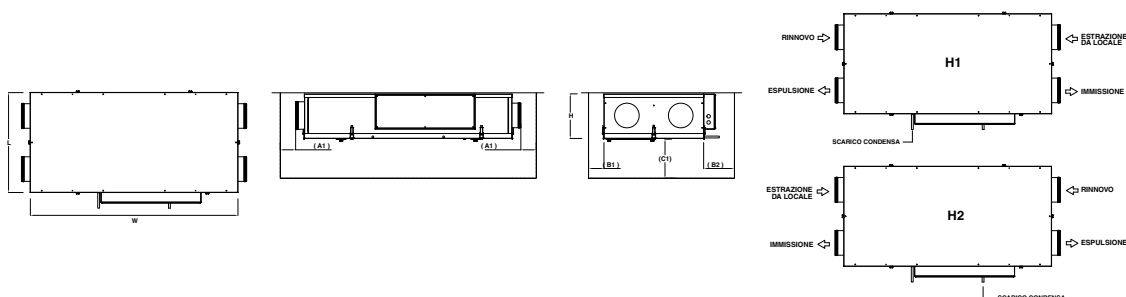

Width A	mm	1150
Depth B	mm	650
Height C	mm	290
DN diameter	Ø	160
A1	mm	30
B1	mm	30
B2	mm	300
C1	mm	250
Weight	Kg	38
Condensate	Ø	18

N.B.: dimensions refer to the unit as seen from above

VMAG-400 Vertical Installation Dimensions

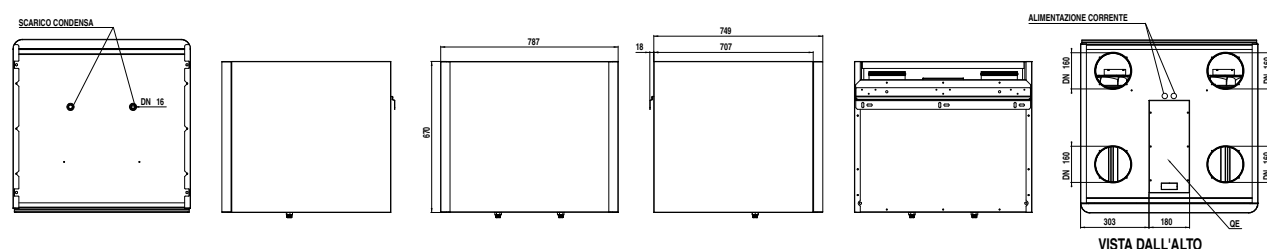


Width A	mm	790
Depth B	mm	770
Height C	mm	670
DN diameter	Ø	160
A1	mm	50
B1	mm	300
C1	mm	600
Weight	Kg	42
Condensate	Ø	20



ACCESSORIES

Code	Description
VMAG-KF9-3040	FITT Agix® filters ePM1 80% (2 pcs. kit) for 300/400 horizontal and vertical units

vmgair16 outdoor grilles



Outdoor inspectionable air intake/exhaust snap-on grille with insect screen. Easy cleaning and maintenance.
RAL 9010 powder-coated galvanised metal

Code	Description	Finish	B X B [mm]
VMGAIR16100	VMGAIR galvanised metal outdoor grille with Ø100 connection	RAL 9010	168 x 168
VMGAIR161251	VMGAIR galvanised metal outdoor grille with Ø125 connection	RAL 9010	230 x 230
VMGAIR1616181	VMGAIR galvanised metal outdoor grille with Ø160 / 180 connection	RAL 9010	270 x 270
VMGAIR16200	VMGAIR galvanised metal outdoor grille with Ø200 connection	RAL 9010	300 x 300
VMGAIR16250	VMGAIR galvanised metal outdoor grille with Ø250 connection	RAL 9010	300 x 300

vmgair-pvc outdoor grilles



PVC external air intake/exhaust grille, compact, shaped and with insect screen removable from below.
CONSTRUCTION MATERIAL: anti-condensation PVC, thickness 3 mm
RAL 7035 COLOUR;
Collar made of PVC pipe elements.
Fixing methods: screws and dowels (included)

NEW

Code	Connection
VMGAIR125PVC	Ø 125
VMGAIR160PVC	Ø 155-160
VMGAIR200PVC	Ø 200

vmge grille - flush mounting adapter



Customisable grille - flush mounting adapter for air intake/exhaust with coarse insect screen.
Ideal for flush mounting on an external wall with a depth of 100 mm.

Code	Description	Connection	Construction material/Finish
VMGE125B	VMGE outdoor metal grille	Ø 125	RAL 9010 galvanised powder-coated metal
VMGE125I	VMGE outdoor metal grille	Ø 125	INOX
VMGE1618B	VMGE outdoor metal grille	Ø 160 / 180	RAL 9010 galvanised powder-coated metal
VMGE1618I	VMGE outdoor metal grille	Ø 160 / 180	INOX

exhaust grille




Code	Description
VMGEESFB	White ABS exhaust grille with non-return butterfly damper (removable) Universal collar Ø100/110/120/130/150

abs grilles




Code	Description
VMGET125	Ø125 round ABS grille with springs
VMGET160	Ø160 round ABS grille with springs
VMGET200	Ø200 round ABS grille with springs

rigid epp pipes and sleeves

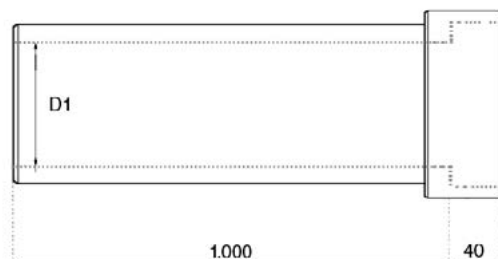

INSULATED PIPE

Codes		VMEPP-L1-125	VMEPP-L1-160	VMEPP-L1-180
Internal diameter (D1)	mm	125	160	180
Length	mm	1000	1000	1000
Thickness	mm	15	15	15
Thermal conductivity	W/m*K	0.039	0.039	0.039
Airtightness	class	C	C	C
Surface roughness	mm	0.077	0.077	0.077
Material		EPP	EPP	EPP



INSULATED SLEEVE


Codes		VMEPP-M-125	VMEPP-M-160	VMEPP-M-180
Internal diameter (D1)	mm	125	160	180
Thickness	mm	15	15	15
Thermal conductivity	W/m*K	0.039	0.039	0.039
Airtightness	class	C	C	C
Surface roughness	mm	0.077	0.077	0.077
Material		EPP	EPP	EPP

rigid epp bends



INSULATED 45° BEND

Codes		VMEPP-C45-125	VMEPP-C45-160	VMEPP-C45-180
Internal diameter (D1)	mm	125	160	180
Thickness	mm	15	15	15
Thermal conductivity	W/m*K	0.039	0.039	0.039
Airtightness	class	C	C	C
Surface roughness	mm	0.077	0.077	0.077
Material		EPP	EPP	EPP

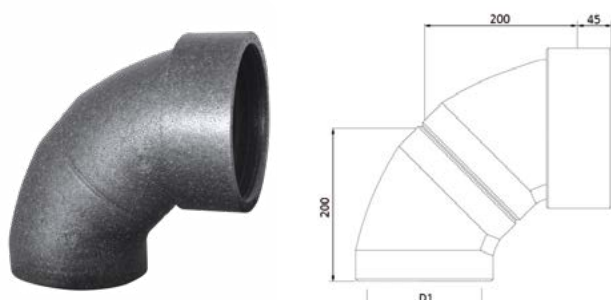

INSULATED 90° BEND

Codes		VMEPP-C90-125	VMEPP-C90-160	VMEPP-C90-180
Internal diameter (D1)	mm	125	160	180
Thickness	mm	15	15	15
Thermal conductivity	W/m*K	0.039	0.039	0.039
Airtightness	class	C	C	C
Surface roughness	mm	0.077	0.077	0.077
Material		EPP	EPP	EPP



SILENCERS, "AIRSAN" PIPES AND RELATED ACCESSORIES

VMSI16125		L=1 m	Ø 125
VMSI16160		L=1 m	Ø 160
VMSI16180	Silencers for EPP hoses or pipes consisting of a pipe section with a plastic interior with spiral. Glass wool pipe insulation, thickness 25mm, density 16 kg/m³, with 150 micron thick non-woven inner membrane. Glass-fibre reinforced aluminised polyester outer protection.	L=1.5 m	Ø 180
VMSI1620015		L=1.5 m	Ø 200
VMSI16200		L=10 m	Ø 200
VMSI1625020		L=2 m	Ø 250
VMSI16250		L=10 m	Ø 250



VML2610085		Ø 85
VML2610102	AIRSAN flexible pipes	Ø 102
VML2610127	L=10ml with SANITIZED anti-bacterial/anti-mould internal treatment, heat-insulating coating and external resin film protection.	Ø 127
VML2610165	Internal harmonic steel wire spiral	Ø 165
VML2610203	It can be cleaned with a probe.	Ø 203
VML2610254		Ø 254



VML2610127R	AIRSAN COATED flexible ducting	Ø 127
VML2610160R	L=10ml with SANITIZED anti-bacterial/anti-mould internal treatment, heat-insulating coating and external resin film protection.	Ø 160
VML2610203R	Incorporated steel wire spiral. Outer coating of 25 mm polyester fibre wrapped with aluminised film vapour barrier layer	Ø 203
VML2610254R	Cleanable with probe.	Ø 254



-Q/03100		Ø 100
-Q/03125	PVC coupling sleeves for joining flexible hoses to each other and to anchors: flexible pipes - Airsan silencers - Airsan, silencers - hose	Ø 125
-Q/03160		Ø 160
-Q/03200		Ø 200
-Q/03245	An appropriately sized hose clamp can be used to fasten the hose.	Ø 245
-Q/03295		Ø 295




-N/0160135		for Ø 127
-N/0160215	Steel hose clamps, width 9 mm, thickness 0.6 mm. (pack of 10 pcs.)	for Ø 160 and 200
-N/0160380		for Ø 254



AIRBOX PP DISTRIBUTION BOXES Ø125

VMABOX12475		4 collars Ø 75
VMABOX12490	AIRBOX Ø 125 connection - N.B. excluding any anti-unthreading clips	4 collars Ø 90
VMABOX12675		6 collars Ø 75
VMABOX12690		6 collars Ø 90
VMABOXRAC	PVC fitting for Ø 125 coupling on Airbox	

Ø125 AIRBOX COMPOSITION EXAMPLES WITH THE MAIN AIR DISTRIBUTION PIPES


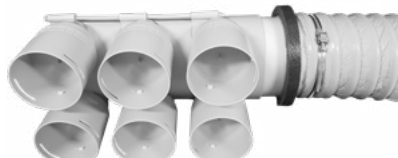
AIRBOX 125 code VMABOX12675  and VMABOXRAC fitting 	+ EPP pipe Ø125 code VMEPP-L1-125 	→ 
	+ Airsan pipe Ø127 code VML2610125  Hose clamp code -N/0160135 	→ 
	+ Silencer Ø125 code VMSI16125  Hose clamp code -N/0160135 	→ 

smart small sheet metal distribution box



Smart Small externally insulated distribution box
sizes WxHxD: 387x192x192 mm.

(including 1 main collar diameter increasing ring)



Smart Small box +
Expansion plate



Code	Description	Main collar Ø [mm]
VMSMART1216675	with 6 Ø75 "Grey" pipe collars	125/160
VMSMART1618675	and no. 1 preset on short side for the PVC expansion plate (EXCLUDED)	160/180
VMSMART12161075	with 10 Ø75 "Grey" pipe collars	125/160
VMSMART16181075	and no. 1 preset on short side for the PVC expansion plate (EXCLUDED)	160/180
VMSMART1216690	with 6 Ø90 "Grey" pipe collars	125/160
VMSMART1618690	and no. 1 preset on short side for the PVC expansion plate (EXCLUDED)	160/180


Note: all sheet metal-pvc Smart boxes are partially lined internally with 10 mm thick polyester fibre panel with film:



* With thermo-acoustic lining

* Prevents the proliferation of fungi and bacteria; suitable for installation inside ventilation ducts

expansion plate



PVC expansion plate with no. 2 additional collars for Smart Small box on the short side and for Smart Medium and Large box on one side

Screws and gaskets included

Note: excluding the use of expansion plates on the FITT Agix Smart-PVC series boxes

Code	Description	Diffusion collars Ø [mm]
VMSMPL275	PVC expansion plate	75
VMSMPL290		90

smart medium sheet metal distribution box

AXIAL



REVERSIBLE





SIDE

Smart Medium reversible externally insulated distribution box sizes WxHxD: 321x307x220 mm.

(including 1 collar diameter increasing ring)

Reversible: supplied as standard with axial/rear connections, which are however reversible (side connections obtained by rotating the plate on site).



*space requirement for expansion plate

Code	Description	Main collar Ø [mm]
VMSMM1216675	with 6 Ø75 pipe collars on base plate and no. 2 side presets for the PVC expansion plates (EXCLUDED)	125/160
VMSMM1618690	with 6 Ø90 collars on base plate and no. 2 side presets for the PVC expansion plates (EXCLUDED)	160/180

smart large sheet metal distribution box

AXIAL





REVERSIBLE



SIDE

Smart Large externally insulated distribution box sizes WxHxD: 424x307x220 mm.

(including 1 collar diameter increasing ring)



*space requirement for expansion plate

Code		VMSML1618875	VMSML1618890	VMSML1820875	VMSML1820890
Collars diameter for diffusion side pipe	mm	75	90	75	90
collars supplied as standard	no.	8	8	8	8
optional collars max	no.	2+2	2+2	2+2	2+2
Main collar diameter	mm	160/180	160/180	180/200	180/200
Maximum flow rate with 8 collars (air speed 3 m/s)	mc/h	272	384	272	384
Maximum flow rate with 8+4 collars (air speed 3 m/s)	mc/h	408	450	408	450

fitt agix smart box pvc distribution boxes

Boxes for distributing fresh air to living rooms, or extracting exhaust air from humid rooms.

Fully made of anti-condensation PVC, thickness 3 mm.

They are internally lined with 10 mm thick polyester fibre panels covered with a self-extinguishing protective film that is impermeable to water, oil and dust.

They are also externally coated with 3 mm thick polyethylene foam insulation.

The boxes have a PP main coupling with gasket (diameter Ø125-Ø160 or Ø160-Ø180, depending on model), for connection to the ventilation unit by means of a rigid or flexible pipeline (if required, with the interposition of a silencer, not supplied but recommended).

Fixing to the wall or ceiling is by means of 4 adjustable 'L' brackets with self-tapping PVC screws supplied.

To allow distribution to the various rooms, they have PP connections ("Grey" type) to the round semi-rigid pipes (Ø75 or Ø90, depending on model).

The 'SMART BOX S' series has 6 connections consisting of threaded Grey collars, and also 2 threaded sealing plugs on the face opposite the main connection. These plugs are easily unscrewed for the installation of additional threaded Grey collars or for swapping the positions of the Grey collars installed at the factory.

The "SMART BOX M" series has 6 connections consisting of threaded Grey collars, and also 6 threaded sealing plugs on one of the sides, as well as 2 more threaded plugs on both sides.


These plugs are easily unscrewed for the installation of additional threaded Grey collars (please note that there are only 4 couplings on the sides for the addition of further connections) or for swapping the positions of the Grey collars installed at the factory.

The "SMART BOX L" series has 8 connections consisting of threaded Grey collars, and also 8 threaded sealing plugs on one of the sides, as well as 2 more threaded plugs on both sides.


These plugs are easily unscrewed for the installation of additional threaded Grey collars (please note that there are only 4 couplings on the sides for the addition of further connections) or for swapping the positions of the Grey collars installed at the factory.

Accessories: Grey threaded collars Ø75 or Ø90.

For other accessories, relating to collars and semi-rigid and flexible pipes.

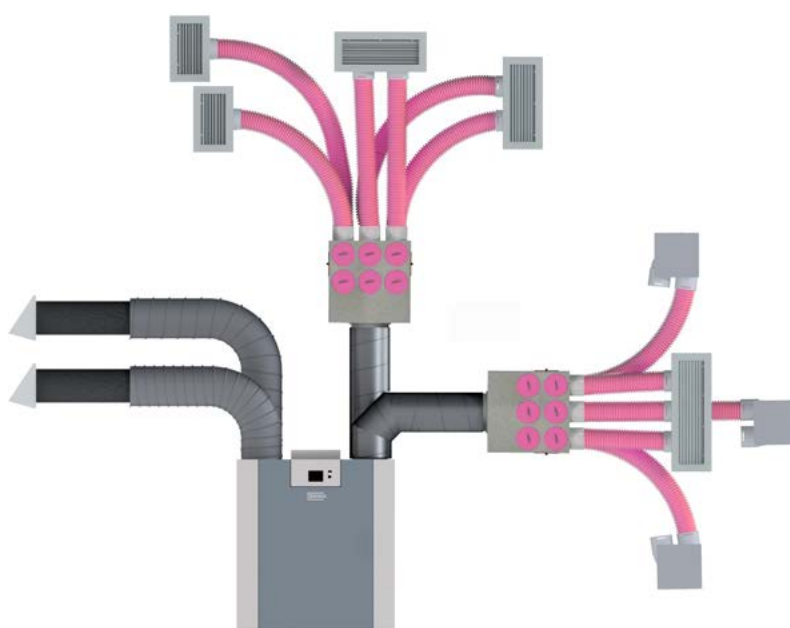

fitt agix smart box s distribution box

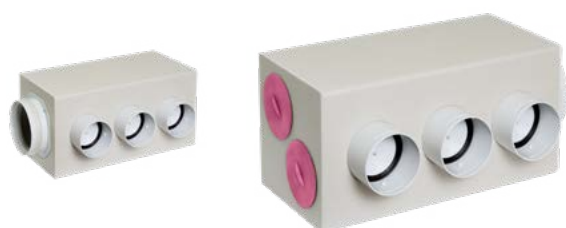

Internally and externally insulated Smart box S distribution box.
Entirely made of PVC
Sizes WxHxD: 387x192x192 mm
(including 1 main collar diameter increasing ring)

NEW

PATENT
PENDING

Code	Description	Ø diffusion side pipe collars [mm]	Collars supplied as standard [no.]	Main collar Ø [mm]
VMSMSP1275	n. 2 presets for collars, with threaded plugs	75	6	125/160
VMSMSP1675		75	6	160/180
VMSMSP1290		90	6	125/160
VMSMSP1690		90	6	160/180

fitt agix smart box m distribution box




Internally and externally insulated Smart box M distribution box.
Entirely made of PVC
Sizes WxHxD: 321x307x220 mm.
(including 1 collar diameter increasing ring)

NEW

PATENT
PENDING

Code	Ø diffusion side pipe collars [mm]	Collars supplied as standard [no.]	Max optional collars [no.]	Ø main collar [mm]	Maximum flow rate with 6 collars (air speed 3 m/s) [m³/h]	Maximum flow rate with 6+4 collars (air speed 3 m/s) [m³/h]
VMSMMP75	75	6	2+2	125/160	204	340
VMSMMP90	90	6	2+2	160/180	288	400

fitt agix smart box l distribution box

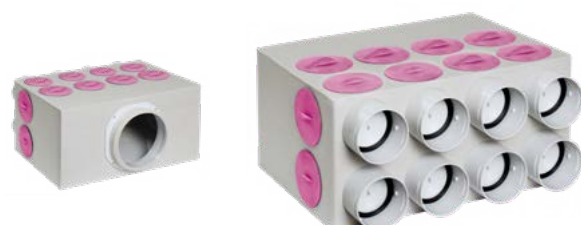

Internally and externally insulated Smart box L distribution box.
Entirely made of PVC
Sizes WxHxD: 424x307x220 mm.
(including 1 collar diameter increasing ring)

NEW

PATENT
PENDING

Code	Ø diffusion side pipe collars [mm]	Collars supplied as standard [no.]	Max optional collars [no.]	Ø main collar [mm]	Maximum flow rate with 8 collars (air speed 3 m/s) [m³/h]	Maximum flow rate with 8+4 collars (air speed 3 m/s) [m³/h]
VMSMLP75	75	8	2+2	160/180	272	408
VMSMLP90	90	8	2+2	160/180	384	450

slim little pvc distribution box



SLIM LITTLE distribution box insulated externally and lined in internal bottom side with thermal-acoustic panel. No. 1 Ø125 or Ø160 main collar with gasket and Ø75 or Ø90 distribution collars for round semi-rigid pipe.

Box body dimensions (253 x 253 x 118 mm).
Anti-condensation PVC material.
Ideal for floor use

Code	Model
VMBSL12875	Ø125 and 8 x Ø75
VMBSL12890	Ø125 and 8 x Ø90
VMBSL16875	Ø160 and 8 x Ø75
VMBSL16890	Ø160 and 8 x Ø90



Technical detail of the
Slim little PVC distribution box


slim medium pvc distribution box



SLIM MEDIUM distribution box insulated externally and lined in internal bottom side with thermal-acoustic panel. No. 1 Ø160 or Ø180 main collar with gasket and Ø75 or Ø90 distribution collars for round semi-rigid pipe.

Box body dimensions (354 x 354 x 118 mm)
Anti-condensation PVC material.
Ideal for floor use

Code	Model
VMBSM161275	Ø160 and 12 x Ø75
VMBSM161290	Ø160 and 12 x Ø90
VMBSM181275	Ø180 and 12 x Ø75
VMBSM181290	Ø180 and 12 x Ø90
VMBSM201275	Ø200 and 12 x Ø75
VMBSM201290	Ø200 and 12 x Ø90

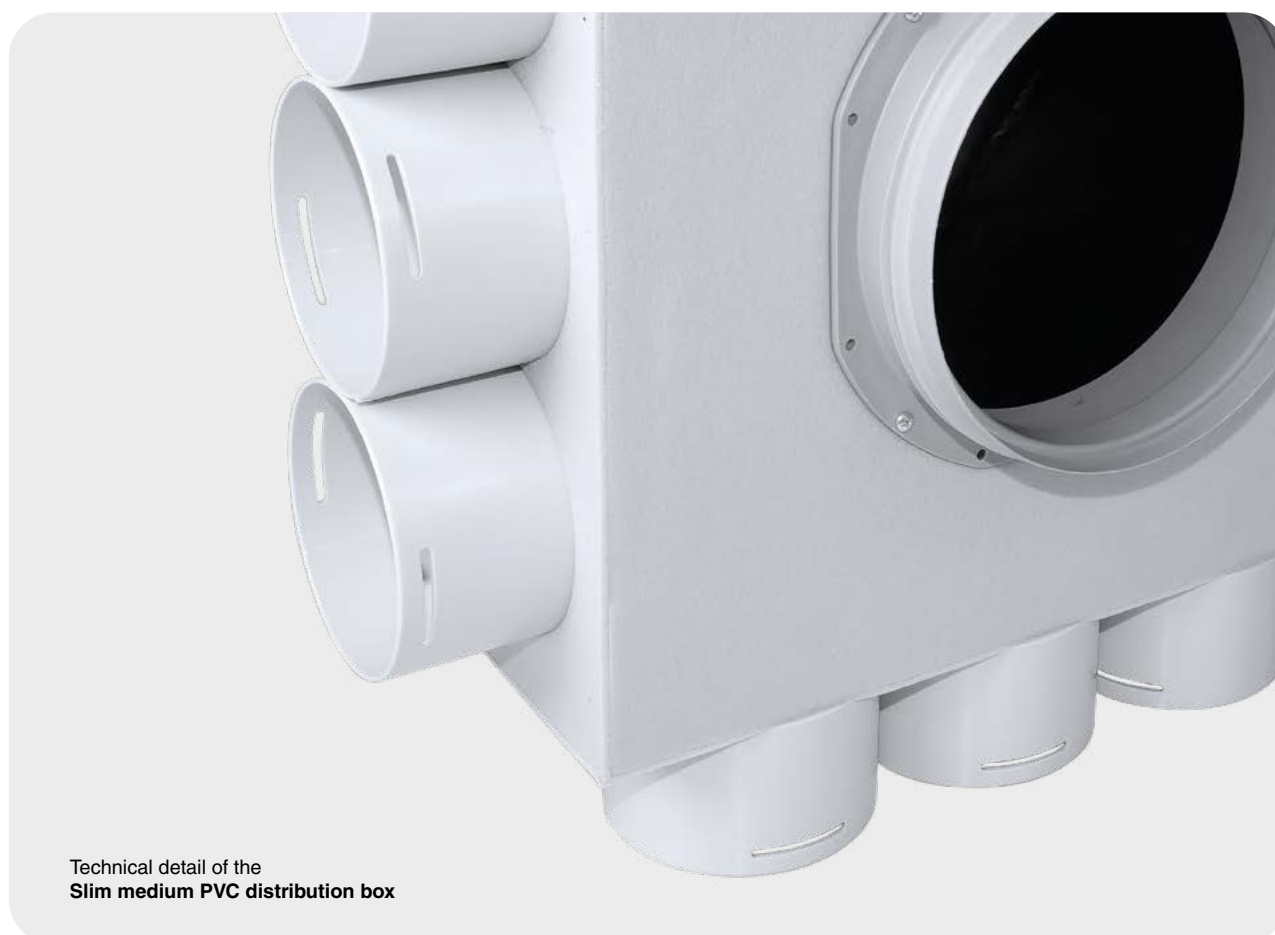

Technical detail of the
Slim medium PVC distribution box

semi-rigid round pipes



SEMI-RIGID ROUND PIPE Ø75 / Ø90

VMLA187550AG	Antimicrobial, antibacterial and antistatic round pipe Flow rate at 3 m/s: 34 m³/h L= 50 m (3 rolls/pallet)	Ø 75
VMLA189050AG	Antimicrobial, antibacterial and antistatic round pipe Flow rate at 3 m/s: 48 m³/h L= 50 m (5 rolls/pallet)	Ø 90

COMPLIANT WITH EN ISO846:1999 - Resistant to static loads

VMGI1875-AG	Joint-sleeve for round pipe	Ø 75
VMGI1890-AG		Ø 90

VMCUTAG-7590FIT	Cutter for semi-rigid round pipes (5 pcs/box)	For pipes Ø75 - Ø90
VMCUT75	Semi-rigid round pipe cutter support - cutter not included -	For pipes Ø75
VMCUT90		For pipes Ø90

insulated semi-rigid round pipes



INSULATED SEMI-RIGID ROUND PIPES Ø75 / Ø90

VMLAI61875FITT	Antimicrobial, antibacterial, antistatic round pipe L= 25 m	Ø 75
VMLAI61890FITT	Externally insulated with chemically cross-linked closed-cell PE foam adhesive mat Insulation thickness 6 mm	Ø 90
VMLAI101875FITT	Antimicrobial, antibacterial, antistatic round pipe L= 25 m	Ø 75
VMLAI101890FITT	Externally insulated with chemically cross-linked closed-cell PE foam adhesive mat Insulation thickness 10 mm	Ø 90

ACCESSORIES FOR SEMI-RIGID ROUND PIPE Ø75 E Ø90



VMAT186375AP	Round pipe sealing rings (10 pcs/pack)	Ø 75
VMAT187590AP		Ø 90

VMCFA75	Anti-unthreading rings for round tube (optional)	Ø 75
VMCFA90		Ø 90

VMCLIP-75BL	Pipe clips with safety spring The ducts can be secured in any condition	(50 pcs/pack)	blue	Ø75
VMCLIP-75NR	Available in blue and black Immediate recognition of delivery (blue)	(50 pcs/pack)	black	Ø75
VMCLIP-90BL	and return (black) circuits Modular hook for multiple lines	(40 pcs/pack)	blue	Ø90
VMCLIP-90NR	Speed and ease of installation	(40 pcs/pack)	black	Ø90

VTDB75AGFITT	Round pipe plugs (10 pcs/pack)	Ø 75
VTDB90AGFITT		Ø 90

airpiu' system components for semi-rigid pipe



VMGI186375APFIT	Round pipe straight joint, sealing rings included	Ø 75
VMGI187590APFIT		Ø 90



VMC1875AP	AIRPIU 90° bend for round pipe (with pipe holding claws) - sealing rings included	Ø 75
VMC1890AP		Ø 90



VMRC187590AP	AIRPIU Ø90 - Ø75 pipe reduced bend	
---------------------	------------------------------------	--



VMRD187590AP	AIRPIU Ø90 - Ø75 pipe reduced coupling for system round pipe (with pipe holding claws) - including sealing rings	
---------------------	--	--



VMRP1875	Round pipe flow regulators (10 pcs pack)	Ø 75
VMRP1890	Round pipe flow regulators (5 pcs pack)	Ø 90

SEMI-RIGID PIPE GREY COLLARS Ø75 AND Ø90



COLL75-7035	Quick coupling collar suitable for connecting semi-rigid corrugated double-wall pipes with an external diameter of Ø75 mm (and internal diameter of Ø63 mm) or Ø90 mm (and internal diameter of Ø75 mm), for use in HRV systems.	for semi-rigid pipes Ø75
COLL90-7035	Collar made of hPP (polypropylene monopolymer). Easy to install by screwing onto a threaded base*, a threaded ring nut, or using glue.	for semi-rigid pipes Ø90

HRV AIRSAN PIPE





VML2610085	AIRSAN flexible pipe L= 10 m with SANITIZED anti-bacterial/anti-mould internal treatment, heat-insulating coating and external resin film protection. Internal harmonic steel wire spiral. It can be cleaned with a probe	Ø 85	for collars Ø75
VML2610102		Ø 102	for collars Ø90

ø125 pp airpiù system circular adapters



Ø125 PP AIRPIÙ SYSTEM CIRCULAR ADAPTERS - CEILING INSTALLATION

VMAVC75PROLFITT	Ø125 circular adapter with 33 cm extension and Ø75 or Ø90 sealing rings included	2 collars Ø75
VMAVC90PROLFITT	Ø 125 PP plug for on-site protection included	2 collars Ø90



VMLT125PROL	Ø125 circular adapter extension - useful length 33 cm
--------------------	---



VMKFAV1251	Ø 125 adapter fixing kit for installation on plasterboard, including 15 cm extension
-------------------	--



Ø125 PP AIRPIÙ SYSTEM CIRCULAR ADAPTERS - WALL INSTALLATION

VMAVC75APFITT	Ø125 circular adapter with mortar protective cover FOR WALL INSTALLATION	2 collars Ø75
VMAVC90APFITT	Including sealing rings	2 collars Ø90








rectangular reversible adapters



Galvanised sheet metal and PVC adapters with factory set side connections that can also be moved to the rear ("reversible"), including "Grey" type collars
With semi-rigid pipe sealing rings. Cardboard template for dust protection included.
Suitable for Flat vents, grilles and diffusers, and perforated grilles.

Depth 103 mm

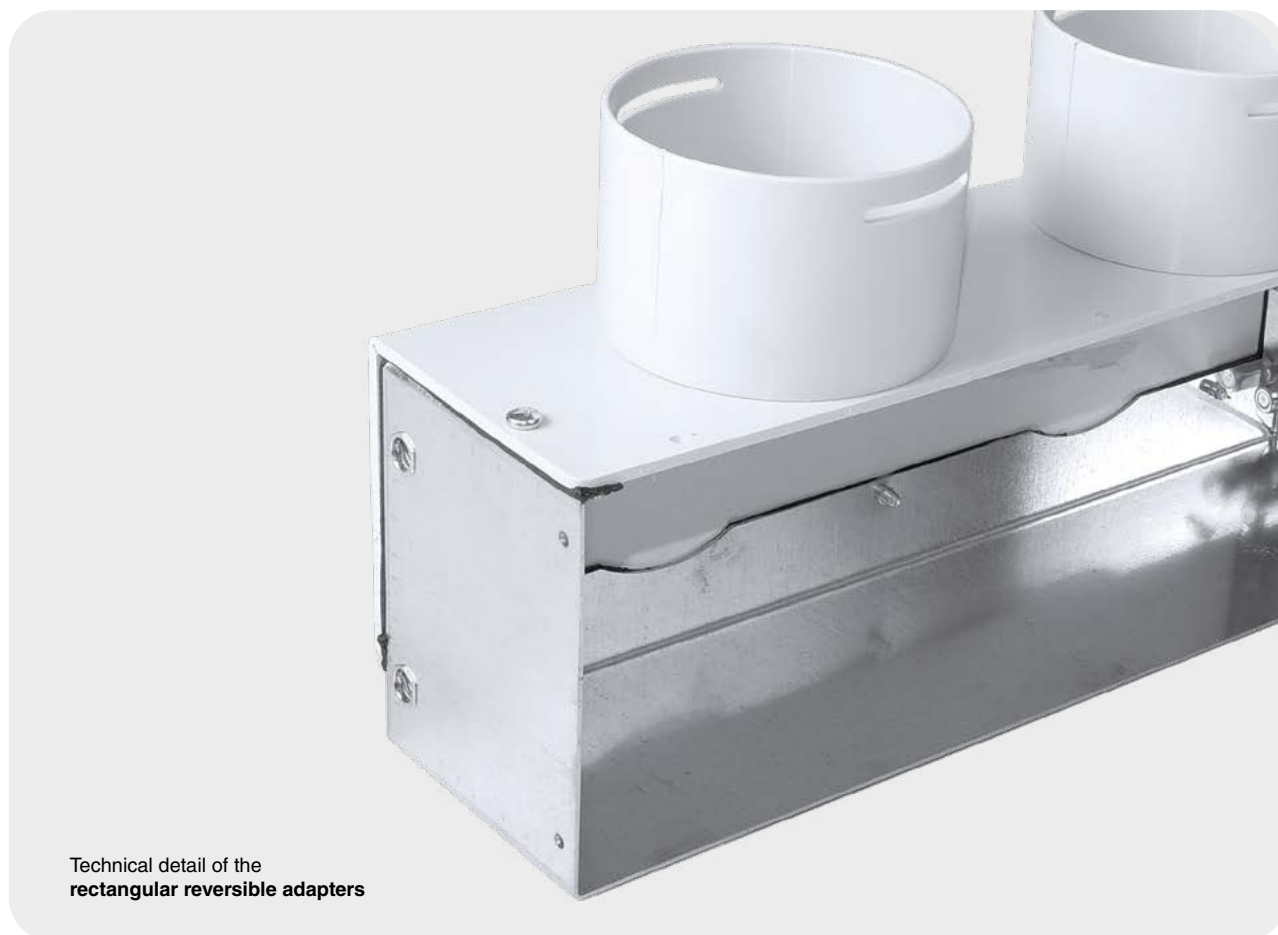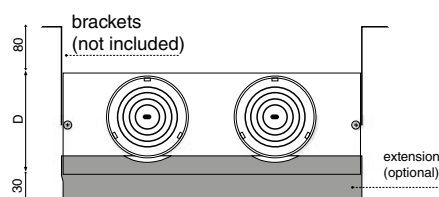


Technical detail of the
rectangular reversible adapters

Code		VMAD20X10X1075	VMAD30X10X1075	VMAD40X10X1075
Collar diameter	mm	75	75	75
Collars	no.	1	2	3
Grille side dimensions	mm	200x100	300x100	400x100
Max flow rate (air speed 3 m/s)	m ³ /h	34	68	102
Depth (D)	mm	103	103	103

Code		VMAD20X10X1090	VMAD30X10X1090	VMAD40X10X1090
Collar diameter	mm	90	90	90
Collars	no.	1	2	3
Grille side dimensions	mm	200x100	300x100	400x100
Max flow rate (air speed 3 m/s)	m ³ /h	48	96	144
Depth (D)	mm	103	103	103



VMADKITS100 Kit of 2 brackets for fixing galvanised sheet metal 100 mm high and 103 mm or 83 mm deep adapters, or 140x140 mm square adapters





low-profile rectangular reversible adapters



Galvanised sheet metal and PVC adapters with factory set side connections that can also be moved to the rear ("reversible"), including "Grey" type collars
With semi-rigid pipe sealing rings. Cardboard template for dust protection included.
Suitable for Flat vents, grilles and diffusers, and perforated grilles.

Depth reduced to 83 mm

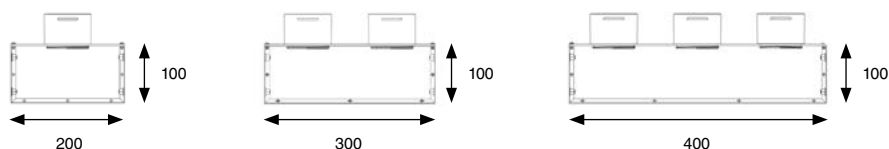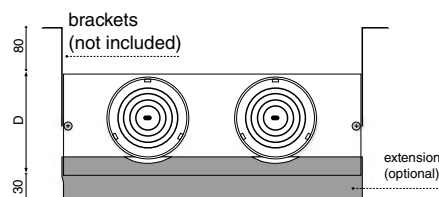

Code		VMAD20X10XR75	VMAD30X10XR75	VMAD40X10XR75
Collar diameter	mm	75	75	75
Collars	no.	1	2	3
Grille side dimensions	mm	200x100	300x100	400x100
Max flow rate (air speed 3 m/s)	mc/h	34	68	102
Depth (D)	mm	83	83	83



VMADKITS100

Kit of 2 brackets for fixing galvanised sheet metal 100 mm high and 103 mm or 83 mm deep adapters, or 140x140 mm square adapters



accessories for adapters



VMRPT75AP	Flow regulators for semi-rigid pipes - 5 pcs pack (to be inserted inside the pipe on the grille side.	Ø 75
VMRPT90AP	Each regulator consists of 3 removable rings)	Ø 90



VMKISOP140X140	Insulation on adhesive expanded polyethylene strip for galvanised sheet metal-PVC adapters	425x103
VMKISOP200X100		420x103
VMKISOP300X100	INSULATION CHARACTERISTICS Density 30 kg/m³ - Thickness: 3 mm	520x103
VMKISOP400X100	Thermal conductivity at 23°C: 0.035 W/mK Thermal conductivity at 40°C: 0.039 W/mK	620x103

Actual insulation strip dimensions [mm]



VMPP140X140	D=30 mm extension for galvanised sheet metal-PVC adapters	140x140
VMPP200X100FITT		200x100
VMPP300X100FITT	D=30 mm extension for galvanised sheet metal-PVC adapters (2 pcs/pack)	300x100
VMPP400X100FITT		400x100

Grille side dimensions of related adapter [mm]



VMRF140X140		130x160
VMRF200X100		190x130
VMRF300X100	Mesh kit + G4 filter for galvanised sheet metal-PVC adapters (1 pc.)	290x130
VMRF400X100		390x130

Actual mesh dimensions [mm]



VMFV100140X140		140x140
VMFV100200X100		230x140
VMFV100300X100	Filters for galvanised sheet metal - PVC and polycarbonate polyester adapters, class G4, pack of 10 pcs.	330x140
VMFV100400X100		430x140

Actual filter dimensions [mm]



VMAF125	Ring + filter kit for Ø125 adapter with pipe/extension	Ø125
----------------	--	------



VMF-125DS	Double-layer filter specific for smoke-grease for Ø125 adapter	Ø125
------------------	--	------



VMF-20X10DS		200x100
VMF-30X10DS	Double-layer filter specific for smoke-grease	300x100
VMF-40X10DS		400x100



VMFV100125	G4 class polyester filter for Ø125 adapters - 10 pcs pack	Ø125
-------------------	---	------

perforated screen diffusers



PERFORATED SLOTTED SCREEN DIFFUSERS

Code	Description	Hole size [mm]
VMGSFAO200X100B	Perforated screen diffuser with horizontal slots made of galvanised sheet metal white RAL9010 powder-coated	200x100
VMGSFAO300X100B		300x100
VMGSFAO400X100B		400x100



CLASSIC PAINTED GALVANISED STEEL PERFORATED SCREEN DIFFUSERS

Code	Description	Flow rate at 1 m/s [m³/h]	Hole size [mm]
VMGSF140X140B		10	140x140
VMGSF200X100B	Perforated screen diffuser made of galvanised sheet metal white RAL9010 powder-coated	18	200x100
VMGSF300X100B		30	300x100
VMGSF400X100B		40	400x100



VMADKM	Magnet Kit for Rectangular Adapter for VMGSF white for ceiling installation
---------------	---



PERFORATED SCREEN ROUND /SQUARE DIFFUSERS FOR Ø125

VMGSF16B125	ROUND 162 mm diffuser of galvanised sheet metal RAL 9010 powder-coated. Perforated screen. For installation on Ø125 adapter/pipe (adapter/pipe excluded)
VMGSF16X16B125	SQUARE 162x162 mm diffuser of galvanised sheet metal RAL 9010 powder-coated. Perforated screen. For installation on Ø125 adapter/pipe (adapter/pipe excluded)



Flat line diffusers


FLAT NORMAL DIFFUSERS RAL9010

- Diffuser for the intake and extraction of air in indoor environments.
- It consists of a flat screen made of aluminium set at a protruding distance from the wall, so that the air can travel through the four sides, and an aluminium frame.
- The distance between the screen and the wall, and therefore

the flow rate, can be adjusted to three positions.


- Fixing of the screen to the frame by means of built-in springs.
- The screen can be removed and replaced very easily for cleaning.
- Aluminium white RAL9010 powder-coated.

DETAIL

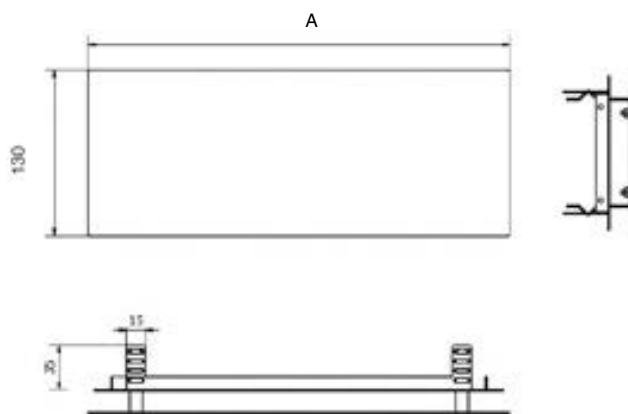

Code	Description	Flow rate at 1 m/s [m³/h]	Hole size [mm]	A [mm]
VMDP140X140B1	Flat powder-coated aluminium screen diffuser RAL 9010	44	140x140	170
VMDP200X100B1		48	200x100	230
VMDP300X100B1		64	300x100	330
VMDP400X100B1		81	400x100	430

ø125 flat diffusers



Code	Description	material and finish	for adapter/pipe	Screen dim. [mm]
VMDP17X17B1251	Flat screen diffuser with frame (pipe excluded)	aluminium RAL 9010	Ø 125	170x170
VMDP17X17I125		STAINLESS STEEL	Ø 125	170x170

ø125 flat glass diffusers

FLAT GLASS DIFFUSERS FOR ADAPTER Ø125

- Square diffuser with frame for Ø125mm pipe/adapter for the intake and extraction of air in indoor environments.
- It consists of a flat screen made of glass with a painted back installed at a distance from the wall or ceiling, allowing the air to flow at the four sides.
- Tabs on the frame allow the screen to wall distance to be adjusted to regulate the air flow (also available is a fully closed position).
- The diffuser screen can be removed and replaced very easily, making maintenance and cleaning extremely simple.
- Available in black and white
- With anti-condensation PVC panel on the back, which also serves to fix the springs to the screen.





Code	Size [mm]	Hole size [mm]	Colour
VMDP17X17I25VB	170x170	Ø 125	White
VMDP17X17I25VN	170x170	Ø 125	Black

flat glass rectangular diffusers

FLAT GLASS DIFFUSERS FOR RECTANGULAR ADAPTERS

- Diffuser for the intake and extraction of air in indoor environments.
- It consists of a flat screen made of back-painted glass set at a protruding distance from the wall so that the air can travel through the four sides, and an aluminium frame.
- The distance between the screen and the wall, and therefore the flow rate, can be adjusted to three positions.
- With anti-condensation PVC panel on the back, which also serves to fix the springs to the screen.
- The screen can be removed and replaced very easily for cleaning.
- Available in black and white.

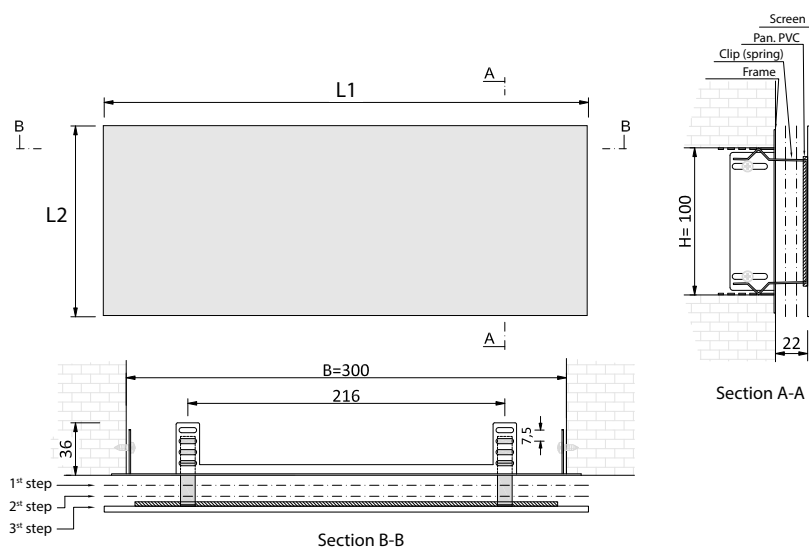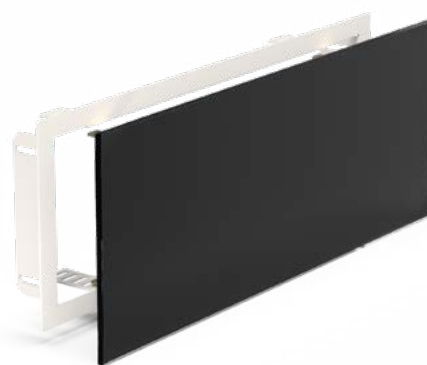

Code	Size L1 [mm]	Size L2 [mm]	Hole size [mm]	Colour
VMDP200100VB	230	130	200x100	White
VMDP300100VB	330	130	300x100	White
VMDP400100VB	430	130	400x100	White
VMDP200100VN	230	130	200x100	Black
VMDP300100VN	330	130	300x100	Black
VMDP400100VN	430	130	400x100	Black

Flat flush mounted diffusers




Code	Description	Flow rate at 1 m/s [m³/h]	Hole size [mm]
VMDPFM140X140B1	Flat diffuser with flat screen, complete with frame, for installation flush with the wall surface, white RAL9010 powder-coated.	29	140x140
VMDPFM200X100B1		31	200x100
VMDPFM300X100B1		42	300x100
VMDPFM400X100B1		53	400x100



Code	Description	Flow rate at 1 m/s [m³/h]	Hole size [mm]
VMDPFM140X140I1	Flat diffuser with flat screen, complete with frame, for installation flush with the wall surface, satin STAINLESS STEEL FINISH	29	140x140
VMDPFM200X100I1		31	200x100
VMDPFM300X100I1		42	300x100
VMDPFM400X100I1		53	400x100

customisable flat flush mounted diffusers



Code	Description	Flow rate at 1 m/s [m³/h]	Hole size [mm]
VMDPPFM14X14I1	Flat customisable diffuser with flat screen, complete with frame, for installation flush with the wall surface, stainless steel Note: THE DIFFUSER IS ONLY SUITABLE FOR WALL INSTALLATION	29	140x140
VMDPPFM20X10I1		31	200x100
VMDPPFM30X10I1		42	300x100
VMDPPFM40X10I1		53	400x100




l= 500 and 1000 mm diffusers for hrv



Code	Description	Nominal hole size [mm]
VMDL1500X55BSU	PVC linear diffuser with 1 slot without nozzles RAL 9010	500x55
VMDL1100X55BSU		1000x55



Code	Description	Nominal hole size [mm]
VMDP500X55B	Flat screen diffuser RAL 9010	500x55
VMDP1000X55B		1000x55



Code	Description	Nominal hole size [mm]
VMGSF500X55B	Perforated screen diffuser RAL 9010	500x55
VMGSF1000X55B		1000x55



Code	Description	Nominal hole size [mm]	
VMDPFM500X57KT	Adapter + flat flush mounted diff. kit RAL 9010	2 x Ø 75	500x55
VMDPFM500X59KT		2 x Ø 90	500x55
VMDPFM1000X57KT		4 x Ø 75	1000x55
VMDPFM1000X59KT		4 x Ø 90	1000x55



GALVANISED METAL SHEET ADAPTERS FOR LINEAR, FLAT AND PERFORATED DIFFUSERS 500-1000 MM

NON-REVERSIBLE





VMAD5075PS	Galvanised sheet metal-PVC adapter, nominal size 500x55x100, for 1-slot / flat / perforated linear diffuser (with kit of brackets for wall/ceiling installation)	With no. 2 pipe collars Ø75
VMAD5090PS		With no. 2 pipe collars Ø90

NON-REVERSIBLE



VMAD10075PS	Galvanised sheet metal-PVC adapter, nominal size 1000x55x100, for 1-slot / flat / perforated linear diffuser (with kit of brackets for wall/ceiling installation)	With no. 4 pipe collars Ø75
VMAD10090PS		With no. 4 pipe collars Ø90

hrv pvc grilles and vents



Code	Description	Sizes [mm]
VMG01140X140B	Classic model PVC grille RAL 9010 Flow rate at 1 m/s: 18 m³/h (Standard fixing with no. 4 plastic clips - not included, to be ordered separately - Optional fixing with no. 2 magnets)	140x140

VMB01140X140B	PVC vent with double row of fins RAL 9010 Flow rate at 1 m/s: 40 m³/h (Standard fixing with no. 4 plastic clips - not included, to be ordered separately - Optional fixing with no. 2 magnets)	140x140
----------------------	--	---------

VMGF01140X140B	Slotted PVC grille RAL 9010 Flow rate at 1 m/s: 45 m³/h (Standard fixing with no. 4 plastic clips - not included, to be ordered separately - Optional fixing with no. 2 magnets)	140x140
-----------------------	--	---------


Code	Description	Flow rate at 1 m/s [m³/h]	Sizes [mm]
VMGF01200X100B	Slotted PVC grille RAL 9010 (Standard fixing with no. 4 plastic clips - not included, to be ordered separately - Optional fixing with no. 2 magnets)	30	200x100
VMGF01300X100B		60	300x100
VMGF01400X100B		90	400x100

Code	Description	Sizes [mm]
VMGF01200X100BM	Slotted PVC grille with magnet kit RAL 9010	200x100
VMGF01300X100BM		300x100
VMGF01400X100BM		400x100

Code	Description	Flow rate at 1 m/s [m³/h]	Sizes [mm]
-B/01200X100B	PVC vent with double row of fins RAL 9010 (Standard fixing with no. 4 plastic clips - not included, to be ordered separately - Optional fixing with no. 2 magnets)	40	200x100
-B/01300X100B		61	300x100
-B/01400X100B		83	400x100
-B/01300X150B		97	300x150
-B/01400X150B		130	400x150
-B/01500X150B		166	500x150

Code	Description	Flow rate at 1 m/s [m³/h]	Sizes [mm]
-B/01200X100BM	PVC vent with magnet kit RAL 9010	40	200x100
-B/01300X100BM		61	300x100
-B/01400X100BM		83	400x100
-B/01300X150BM		97	300x150
-B/01400X150BM		130	400x150
-B/01500X150BM		166	500x150

stainless steel floor grilles



WALKABLE FLOOR GRILLES FOR RECTANGULAR ADAPTERS

Code	Description	Flow rate at 1 m/s [m³/h]	Actual dimensions [mm]
VMGPT200X100IS	INOX SMART walkable grille for floor installation.	71	217x112
VMGPT300X100IS	Including stainless steel counterframe for the use of the adapter and as a support for the grille	103	317x112
VMGPT400X100IS		136	417x112

Code	Description	Flow rate at 1 m/s [m³/h]	Actual dimensions [mm]
VMGPT200X100I	INOX LUX walkable grille for floor installation.	71	217x112
VMGPT300X100I	Including stainless steel counterframe for the use of the adapter and as a support for the grille	103	317x112
VMGPT400X100I		136	417x112

WALKABLE FLOOR GRILLE KIT L=500-1000 MM



Code	Description	Actual dimensions [mm]	GREY collars
VMGPS500X55275I	Complete walkable floor grille set, INOX LUX .	515x55x100	2 x Ø 75
VMGPS100X55475I	Including stainless steel counterframe and galvanised sheet metal-PVC adapter with connections for semi-rigid round pipe Ø 75 and Ø 90	1030x55x100	4 x Ø 75
VMGPS500X55290I		515x55x100	2 x Ø 90
VMGPS100X55490I		1030x55x100	4 x Ø 90

GALVANISED SHEET METAL-PVC ADAPTER EXTENSIONS



Code	Description	Sizes [mm]
VMPP140X140		140x140
VMPP200X100		200x100
VMPP300X100		300x100
VMPP400X100	D=30 mm deep adapter extension	400x100
VMPP500X55		500x55 (nominal)
VMPP100X55		1000x55 (nominal)

ACCESSORIES FOR GALVANISED SHEET METAL-PVC ADAPTERS 500-1000 MM



VMKISOP500X55		500x55x100
VMKISOP1000X55	Insulation kit for adapter	1000x55x100
VMPP500X55		500x55x100
VMPP100X55	Extension with depth D=30 mm for adapter	1000x55x100


airbox sr series delivery plenum

AirBox SR is a system for the distribution (intake) of air from a heat recovery unit and an indoor air conditioning unit.

AirBox SR allows the use of antibacterial and antistatic Ø75 and Ø90mm distribution pipes, both for air conditioning and heat recovery ventilation, decreasing installation space requirements and the crossing of pipes, whilst also improving the performance levels of the installed machines

The AirBox SR supply plenum replaces the supply box of the heat recovery ventilation unit and the channelling plenum of the indoor air-conditioning unit. Thanks to the internal flow separation septum, the two air flows never come into contact, either in the plenum or in the pipes.

NEW

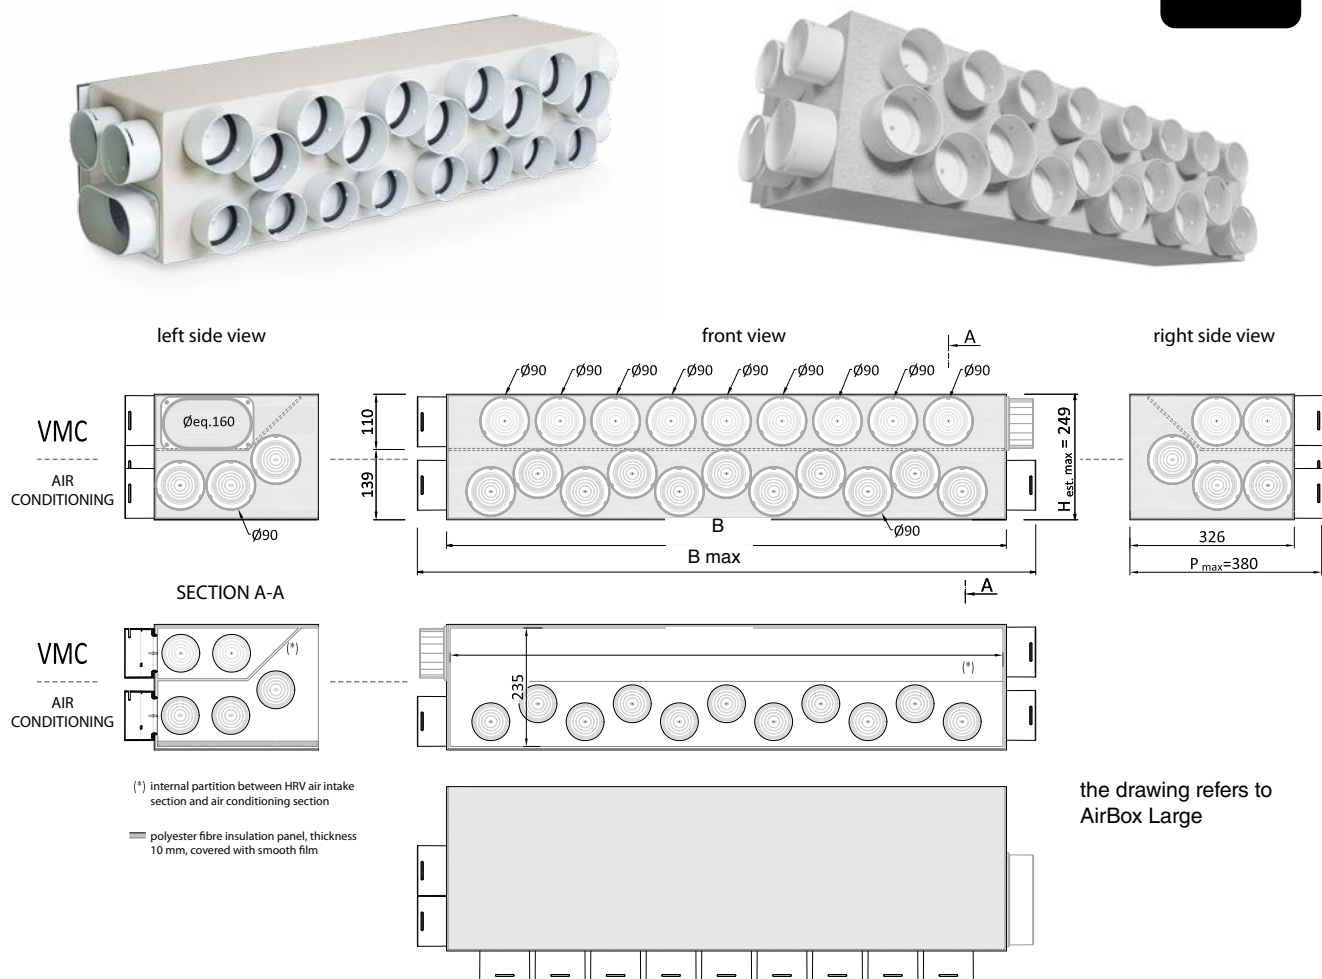

Code	Series	Air conditioning distribution collars		HRV distribution collars		Semi-oval collar HRV coupling size [mm]	Max ext. height H [mm]	Length B [mm]	Depth* D max [mm]
		no.	Ø [mm]	no.	Ø [mm]				
ABS-9075	Small	13	Ø90	8	Ø75	Øeq. 160	249	760	326
ABS-9090	Small	13	Ø90	8	Ø90	Øeq. 160	249	760	326
ABM-9075	Medium	15	Ø90	10	Ø75	Øeq. 160	249	922	326
ABM-9090	Medium	15	Ø90	10	Ø90	Øeq. 160	249	922	326
ABL-9075	Large	17	Ø90	11	Ø75	Øeq. 160	249	1110	326
ABL-9090	Large	17	Ø90	11	Ø90	Øeq. 160	249	1110	326

(*) excluding the space required for the collars and the 10 mm thick PE foam external insulation of unit connection part

Note: AirBox SR devices are supplied for fan coils or indoor units of all makes on the market. Each Airbox SR must be associated with a specific flange for the chosen fan coil or unit model. Contact the company for information on the flange required.

FITT AGIX LINE-S monobloc plenum/linear diffuser

Single-slot «monoblock» linear diffuser, having the plenum constituting a single body with the diffuser itself. Made entirely of PVC. It is modular: multiple plenums can be easily joined to form a multiple-length plenum/diffuser.

When ordering, it is recommended to specify whether the LINE-S is to be installed individually or in modules to be joined together at the construction site. In second case also specify the length and the number of the lines to be made.

Built-in "Grey" threaded collars can be easily removed by unscrewing them, helping with a suitable bar. Ø75 or Ø90 "Grey" collars can be added instead of threaded caps*, or threaded caps can be exchanged for "Grey" collars.

*community registered design number 015060943



Materials of construction:

PVC anti-condensation; PP «Grey» collars and PP threaded caps. External insulation of closed-cell polyethylene foam thick. 3 mm.

Color:

- Color of PVC diffuser/plenum body: gray-light RAL7035 PAINTABLE;
- Color of outer insulation: gray-light RAL7035;
- Color of threaded caps: fuchsia.

Place of installation:

It is ideal for ceiling/ceiling installation, particularly on plasterboard. It can also be installed on walls, with special preference on drywall. Compatible plasterboard thicknesses for fixing, regardless of the model, are 12.5 and 15 mm.

NEW

PATENT
PENDING

PLENUM / LINEAR DIFFUSERS FITT AGIX "LINE-S" SERIES

Code	Mouth dimens. (mm)	"GREY" collars on the long side	Total threaded plugs (of which no. 1 on one of the two 'sides')	Flow rate (m³/h) with v= 1 m/s	Flow rate (m³/h) with v= 2 m/s	Flow rate (m³/h) with v= 3 m/s	Effective length of the plenum excluding isolation. sides x height int. mouth (mm)
VMDLINE5X75	494 x 23	2 x Ø75	3	40	80	120	500 x 23
VMDLINE5X90	494 x 23	2 x Ø90	3	40	80	120	500 x 23
VMDLINE1X75	994 x 23	4 x Ø75	5	83	166	249	1000 x 23
VMDLINE1X90	994 x 23	4 x Ø90	5	83	166	249	1000 x 23

v=crossing velocity at the mouth

ACCESSORIES

Code	Description
VMDLINEK235	kit consisting of no. 2 fins for LINE-S having inner mouth dimensions 494x23 mm
VMDLINEK231	kit consisting of no. 4 fins for LINE-S having inner mouth dimensions 994x23 mm

Specific optional accessories: thin PP fins, which can be added (in production) to direct airflow, including associated screws.



climæ-hrv line pvc plenum for diffusers



PLENUM FOR 2-SLOT LINEAR DIFFUSERS

Code	Description	Collar position	Collars
VMP6X2C12275L	Anti-condensation PVC plenum for linear diffuser 600x(2 slots)xDepth 200 mm	side	1 x Ø125 AIR CONDITIONING + 2 x Ø75 HRV
VMP6X2C12275P		rear	
VMP8X2C12275L	Anti-condensation PVC plenum for linear diffuser 800x(2 slots)xDepth 200 mm	side	
VMP8X2C12275P		rear	
VMP10X2C12275L	Anti-condensation PVC plenum for linear diffuser 1000x(2 slots)xDepth 200 mm	side	1 x Ø125 AIR CONDITIONING + 2 x Ø90 HRV
VMP10X2C12275P		rear	
VMP6X2C12290L	Anti-condensation PVC plenum for linear diffuser 600x(2 slots)xDepth 200 mm	side	
VMP6X2C12290P		rear	
VMP8X2C12290L	Anti-condensation PVC plenum for linear diffuser 800x(2 slots)xDepth 200 mm	side	1 x Ø125 AIR CONDITIONING + 2 x Ø90 HRV
VMP8X2C12290P		rear	
VMP10X2C12290L	Anti-condensation PVC plenum for linear diffuser 1000x(2 slots)xDepth 200 mm	side	
VMP10X2C12290P		rear	



PLENUM FOR 3-SLOT LINEAR DIFFUSERS

Code	Description	Collar position	Collars
VMP6X3C16275L	Anti-condensation PVC plenum for linear diffuser 600x(3 slots)xDepth200 mm	side	1 x Ø160 AIR CONDITIONING + 2 x Ø75 HRV
VMP6X3C16275P		rear	
VMP8X3C16275L	Anti-condensation PVC plenum for linear diffuser 800x(3 slots)xDepth200 mm	side	
VMP8X3C16275P		rear	
VMP10X3C16275L	Anti-condensation PVC plenum for linear diffuser 1000x(3 slots)xDepth200 mm	side	1 x Ø160 AIR CONDITIONING + 2 x Ø90 HRV
VMP10X3C16275P		rear	
VMP6X3C16290L	Anti-condensation PVC plenum for linear diffuser 600x(3 slots)xDepth200 mm	side	
VMP6X3C16290P		rear	
VMP8X3C16290L	Anti-condensation PVC plenum for linear diffuser 800x(3 slots)xDepth200 mm	side	1 x Ø160 AIR CONDITIONING + 2 x Ø90 HRV
VMP8X3C16290P		rear	
VMP10X3C16290L	Anti-condensation PVC plenum for linear diffuser 1000x(3 slots)xDepth200 mm	side	
VMP10X3C16290P		rear	

hrv plenums, diffusers and vents

HRV PVC INDOOR LINEAR DIFFUSERS

Code	Description	Nominal length [mm] x no. of slots
-DL/2A600B		600x2 slots
-DL/2A800B		800x2 slots
-DL/2A1000B	Anti-condensation PVC linear diffuser with WHITE nozzles	1000x2 slots
-DL/3A600B		600x3 slots
-DL/3A800B		800x3 slots
-DL/3A1000B		1000x3 slots
-DL/2A600		600x2 slots
-DL/2A800		800x2 slots
-DL/2A1000	Anti-condensation PVC linear diffuser with BLACK nozzles	1000x2 slots
-DL/3A600		600x3 slots
-DL/3A800		800x3 slots
-DL/3A1000		1000x3 slots

HRV PVC PLENUM

Code	Description	Vent/grille nominal size [mm]
ADF-40X10X16L12	Anti-condensation PVC + sheet metal plenum for grille/vent with Øeq.125 mm SIDE COLLAR - Depht=160 mm	400x100
ADF-30X15X16L12	Anti-condensation PVC plenum for grille/vent with Øeq.125 mm SIDE COLLAR (reversible) - Depht=160 mm	300x150
ADF-40X15X16L12		400x150
ADF-50X15X16L16	Anti-condensation PVC plenum for grille/vent with Øeq.160 mm SIDE COLLAR (reversible) - Depht=160 mm	500x150

HRV POLYCARBONATE PLENUM

Code	Description	Collar Ø [mm]	Vent/grille nominal size [mm]
-EP/01400X100		160/200	400x100
-EP/01300X150	Polycarbonate plenum for grille/vent with selectable collar with adjustable damper	160/200	300x150
-EP/01400X150	-Body depht=110 mm - REAR COLLAR	160/200/250	400x150
-EP/01500X150		160/200/250	500x150

HRV - AIR CONDITIONING PVC PLENUM

Code	Description	Ø air conditioning collar [mm]	Vent/grille nominal size [mm]
VMPE40X1027516		160	400x100
VMPE40X1027512	Anti-condensation PVC plenum (non-reversible) no. 2 Ø75 collars for the HRV side and no. 1 collar for the air conditioning side	125	400x100
VMPE30X1527512		125	300x150
VMPE40X1527512		125	400x150
VMPE50X1527516		160	500x150





B/01 SERIES PVC VENTS FOR AIR CONDITIONING AND HRV PLENUMS AND ADAPTERS

Code	Description	Flow rate 2.5 m/s [m³/h]	Nominal dim [mm]
-B/01200X100B		99	200x100
-B/01300X100B		153	300x100
-B/01400X100B	Anti-condensation PVC vent with double row of adjustable fins RAL 9010	207	400x100
-B/01300X150B		243	300x150
-B/01400X150B		324	400x150
-B/01500X150B		414	500x150

PVC RETURN GRILLE KIT WITH INSPECTIONABLE FILTER-FRAME



Code	Description	Grille nominal size [mm]	Collar Ø [mm]
ADF-GTF1230X20L		300x200	125
ADF-GTF1240X20L	Anti-condensation PVC plenum for GTF series return grille (D=216 mm)	400x200	125
ADF-GTF1640X20L		400x200	160
ADF-GTF1640X30L	(grill and filter excluded)	400x300	160
ADF-GTF1660X30L	Collar position: Side	600x300	160
ADF-GTF1660X40L		600x400	160



Code	Description	Flow rate 2 m/s [m³/h]	Nominal dim. [mm]
-GTF/06300X200B		130	300x200
-GTF/06400X200B	Anti-condensation PVC return grille, inspectionable, with honeycomb filter and galvanised sheet metal filter frame RAL 9010	194	400x200
-GTF/06400X300B		302	400x300
-GTF/06600X300B		425	600x300
-GTF/06600X400B		648	600x400



Code	Description	Nominal dim. [mm]
-F/02300X200	Stitched honeycomb filter 135 g/m²	300x200x6
-F/02400X200	Stitched honeycomb filter 135 g/m²	400x200x6
-F/02400X300	Stitched honeycomb filter 135 g/m²	400x300x6
-F/02600X300	Stitched honeycomb filter 135 g/m²	600x300x6
-F/02600X400	Stitched honeycomb filter 135 g/m²	600x400x6

ventilation valves



VENTILATION VALVES Ø100 AND Ø125

VMVIE125FT "Flat round" plastic adjustable valve Ø125

VMVIE125FQ "Flat square" polymer adjustable valve Ø125

VMBOREA080 Round intake/extraction grille Ø80 TUBPLA series, antistatic plastic material

VMBOREA125 Round intake/extraction grille Ø125 TUBPLA series, antistatic plastic material

VMVF125 "FLOW SQUARE" POLYSTYRENE VALVE Ø125

VMVB125 ROUND POLYSTYRENE VALVE RAL 9016 Ø125

VMC-04-125 Steel ventilation valve with insulated disc, Ø125, RAL 9010

VMVEI100 ABS air intake/extraction round valve Ø100

V/01125 Polypropylene valve Ø125


VENTILATION VALVE FILTERS

VMAF125 Ring + filter kit for Ø125 adapter with extension

VMFV100110 G4 class Ø110 polyester filters for adapters - 10 pcs pack


VMFV100125 G4 class Ø125 polyester filters for adapters - 10 pcs pack

airmix smart series pvc delivery plenums

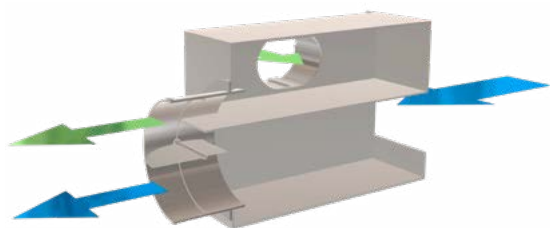

The AirMix SMART plenum is a special PVC-U plenum with a flow separator and a collar (of selectable diameter) for the air coming from the HRV system. Its gravity-driven damper system is the most economical and simplest possible solution when small hallway spaces do not allow for multiple air distribution pipes. The AirMix SMART plenum is equipped with a side collar for the connection of air coming from the Heat Recovery Ventilation unit, with standard diameter Ø125 or Ø150/160mm.

SMALL AirMix
Up to 3 Ø150/160mm front dampers



MEDIUM AirMix
Up to 4 Ø150/160mm front dampers



LARGE AirMix
Up to 5 Ø150/160mm front dampers



PLENUM CODING EXAMPLE

S/M/L	-	A	D1	-	3	0	0	V1 / V2
S = SMALL M = MEDIUM L = LARGE	-	Plenum version A = AirMix SMART	Ducted unit brand and model	-	Ø160 separation dampers (n.)	Ø200 separation dampers (n.)	Ø250 separation dampers (n.)	HRV collar Ø: V1 = Ø125 V2 = Ø150/160 (the separation dampers are operated by gravity)

AIRMIX SMART - DAIKIN

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
FBA35-50A FBQ35-50D FXSQ40-50A	S-AD1-020V1	S-AD1-300V1	S-AD1-400V1*	ON REQUEST
	S-AD1-020V2	S-AD1-300V2	S-AD1-400V2*	ON REQUEST
FBA60-71A FBQ60-71D FXSQ63-80A	M-AD2-020V1	M-AD2-300V1	M-AD2-400V1	M-AD2-500V1*
	M-AD2-020V2	M-AD2-300V2	M-AD2-400V2	M-AD2-500V2*
FDXM25-35F FDXM25-35F3 FDXM25-35F9 FDXS25-35F FXDQ15-32A FXDQ15-32A3	S-AD3-020V1	S-AD3-300V1	S-AD3-400V1*	ON REQUEST
	S-AD3-020V2	S-AD3-300V2	S-AD3-400V2*	ON REQUEST
FDXS50F FXDQ40-50A FXDQ40-50A3	M-AD4-020V1	M-AD4-300V1	M-AD4-400V1	ON REQUEST
	M-AD4-020V2	M-AD4-300V2	M-AD4-400V2	ON REQUEST
FDXM50-60F FDXM50-60F3 FDXM50-60F9 FDXS60F FDXS-50F9 FXDQ63A FXDQ63A3	ON REQUEST	L-AD5-030V1	L-AD5-400V1	L-AD5-500V1
	ON REQUEST	L-AD5-030V2	L-AD5-400V2	L-AD5-500V2
FXSQ40-50P	S-AD6-020V1	S-AD6-300V1	S-AD6-400V1*	M-AD6-500V1*
	S-AD6-020V2	S-AD6-300V2	S-AD6-400V2*	M-AD6-500V2*
FXSQ63-80P	ON REQUEST	M-AD7-030V1	M-AD7-400V1	M-AD7-500V1*
	ON REQUEST	M-AD7-030V2	M-AD7-400V2	M-AD2-500V2*

*One of the zone dampers is on the short side.

AIRMIX SMART - FUJITSU

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
AR*G12LLTB AR*G14LLTB AR*G12LSLAP AR*G14LSLAP	S-AF3-020V1	S-AF3-300V1	S-AF3-400V1*	M-AF3-500V1*
	S-AF3-020V2	S-AF3-300V2	S-AF3-400V2*	M-AF3-500V2*
AR*G18LLTB AR*G18LSLAP	M-AF4-020V1	M-AF4-300V1	M-AF4-400V1	M-AF4-500V1*
	M-AF4-020V2	M-AF4-300V2	M-AF4-400V2	M-AF4-500V2*
ARYG12LHTBP ARYG14LHTBP	S-AF6-020V1	S-AF6-300V1	S-AF6-400V1*	M-AF6-500V1*
	S-AF6-020V2	S-AF6-300V2	S-AF6-400V2*	M-AF6-500V2*
ARYG18LHTBP ARYG24LHTBP ARYG30LHTBP	ON REQUEST	M-AF7-030V1	M-AF7-400V1	M-AF7-500V1*
		M-AF7-030V2	M-AF7-400V2	M-AF7-500V2*

AIRMIX SMART - HITACHI

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
RPI-0.4FSN5E	S-AI16-200V1	S-AI16-300V1	ON REQUEST	ON REQUEST
	S-AI16-200V2	S-AI16-300V2	ON REQUEST	ON REQUEST
RPI-0.6FSN5E RPI-0.8FSN5E RPI-1.0FSN5E RPI-1.5FSN5E	L-AI17-020V1	L-AI17-300V1	L-AI17-400V1	ON REQUEST
	L-AI17-020V2	L-AI17-300V2	L-AI17-400V2	ON REQUEST
RPI-2.0FSN5E RPI-2.5FSN5E RPI-3.0FSN5E	L-AI18-020V1	L-AI18-300V1	L-AI18-400V1	L-AI18-500V1
	L-AI18-020V2	L-AI18-300V2	L-AI18-400V2	L-AI18-500V2
RPIM-0.6FSN4E RPIM-0.8FSN4E RPIM-1.0FSN4E RPIM-1.5FSN4E	S-AI19-020V1	S-AI19-300V1	S-AI19-400V1*	ON REQUEST
	S-AI19-020V2	S-AI19-300V2	S-AI19-400V2*	ON REQUEST
RAD-50RPE RAD-60RPE RAD-50PPA RAD-60PPA RAD-50PPD RAD-60PPD	ON REQUEST	M-AI20-030V1	M-AI20-400V1	M-AI20-500V1*
	ON REQUEST	M-AI20-030V2	M-AI20-400V2	M-AI20-500V2*

AIRMIX SMART - MIDEA - under development, for info **PLEASE** contact the company

ACCESSORIES

ADF-FIX1	Belt (l=5m) for clamping PVC plenums for ductable units
----------	---

*One of the zone dampers is on the short side.

AIRMIX SMART - MITSUBISHI ELECTRIC				
MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
SEZ-KD25VAL SEZ-M25DAL	S-AE3-200V1	S-AE3-300V1	S-AE3-400V1*	ON REQUEST
	S-AE3-200V2	S-AE3-300V2	S-AE3-400V2*	ON REQUEST
SEZ-KD35VAL SEZ-M35DAL SEZ-KD50VAL SEZ-M50DAL	M-AE4-020V1	M-AE4-300V1	M-AE4-400V1	M-AE4-500V1*
	M-AE4-020V2	M-AE4-300V2	M-AE4-400V2	M-AE4-500V2*
SEZ-KD60VAL SEZ-M60DAL SEZ-KD71VAL SEZ-M71DAL	ON REQUEST	L-AE5-030V1	L-AE5-400V1	L-AE5-500V1
	ON REQUEST	L-AE5-030V2	L-AE5-400V2	L-AE5-500V2
PEFY-P 20/25/32 VMA-E	S-AE13-200V1	S-AE13-300V1	S-AE13-400V1*	ON REQUEST
	S-AE13-200V2	S-AE13-300V2	S-AE13-400V2*	ON REQUEST
PEFY-P 40/50 VMA-E PEAD-RP35JAQ	M-AE14-020V1	M-AE14-300V1	M-AE14-400V1	M-AE14-500V1*
	M-AE14-020V2	M-AE14-300V2	M-AE14-400V2	M-AE14-500V2*
PEFY-P 63/71/80 VMA-E PEAD-RP60JAQ PEAD-RP71JAQ	ON REQUEST	L-AE15-030V1	L-AE15-400V1	L-AE15-500V1
	ON REQUEST	L-AE15-030V2	L-AE15-400V2	L-AE15-500V2

*One of the zone dampers is on the short side.

AIRMIX SMART - MITSUBISHI HEAVY INDUSTRIES

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
FDUM50VF	S-AM13-020V1	S-AM13-300V1	S-AM13-400V1*	ON REQUEST
	S-AM13-020V2	S-AM13-300V2	S-AM13-400V2*	ON REQUEST
FDUM60VF FDUM71VF	M-AM14-020V1	M-AM14-300V1	M-AM14-400V1	M-AM14-500V1*
	M-AM14-020V2	M-AM14-300V2	M-AM14-400V2	M-AM14-500V2*
SRR 25AM-S SRR 35ZM-S	ON REQUEST	S-AM21-030V1*	M-AM21-040V1*	M-AM21-500V1*
	ON REQUEST	S-AM21-030V2*	M-AM21-040V2*	M-AM21-500V2*
SRR 50AM-S SRR 60ZM-S	ON REQUEST	M-AM22-030V1	M-AM22-400V1	M-AM22-500V1*
	ON REQUEST	M-AM22-030V2	M-AM22-400V2	M-AM22-500V2*

AIRMIX SMART - HAIER

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
AD35S2SM3FA	S-AH26-020V1	S-AH26-300V1	S-AH26-400V1*	ON REQUEST
	S-AH26-020V2	S-AH26-300V2	S-AH26-400V2*	ON REQUEST
AD50S2SM1FA AD71S2SM1FA	ON REQUEST	M-AH27-030V1	M-AH27-400V1	M-AH27-500V1*
	ON REQUEST	M-AH27-030V2	M-AH27-400V2	M-AH27-500V2*
AD50S2SM3FA AD71S2SM3FA	ON REQUEST	L-AH28-030V1	L-AH28-400V1	L-AH28-500V1
	ON REQUEST	L-AH28-030V2	L-AH28-400V2	L-AH28-500V2

*One of the zone dampers is on the short side.

air systems and components

FITT Agix® offers complete solutions dedicated to **air distribution and air conditioning systems**: diffusion plenums, grilles, flexible pipes (with or without insulation) and a complete range of accessories for the management of the air (also split into zones) inside the home.



4

index

pvc plenums for ducted units

Easy and Regolo series delivery plenums



p. 92

air distribution pipes and accessories

Airsan anti-bacterial pipes



p. 102

air diffusion and accessories

Plenums for vents and grilles



p. 103

Delivery vents



p. 106

Return grilles



p. 110

air diffusion and accessories

Multi-directional diffusers and linear diffusers



p. 120

Circular diffusers



p. 130

Air valves



p. 132

pvc delivery plenums - easy series



The EASY series plenum is installed on the delivery of ducted units, providing simple and homogeneous air distribution within the home.

The plenum is supplied with collars (already installed) and external insulation; the diameters of the standard configurations are based on the indoor unit model, the flow rate and the head required for optimal distribution.

PLENUM CODING EXAMPLE




S/M/L	-	E	D1	-	0	3	0	0
S = SMALL M = MEDIUM L = LARGE	-	Plenum version: E = EASY	Ducted unit brand and model	-	Ø125 collars (n.)	Ø160 collars (n.)	Ø200 collars (n.)	Ø250 collars (n.)

Easy series plenum sizes:

SMALL: 750 x h 240 x p 320 mm

MEDIUM: 912 x h 240 x p 320 mm

LARGE: 1100 x h 240 x p 320 mm

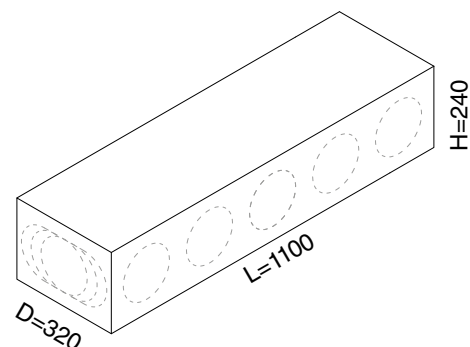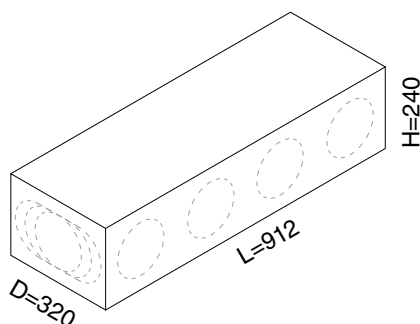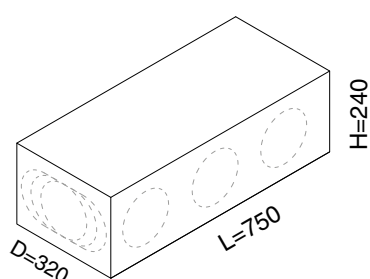

EASY PLENUM - FUJITSU

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
AR*G12LLTB AR*G14LLTB AR*G12LSLAP AR*G14LSLAP	S-EF3-0020 (SMALL 2 × Ø200)	S-EF3-0300 (SMALL 3 × Ø160)	S-EF3-0400* (SMALL 4 × Ø160)	S-EF3-5000* (SMALL 5 × Ø125)
AR*G18LLTB AR*G18LSLAP	M-EF4-0020 (MEDIUM 2 × Ø200)	M-EF4-0300 (MEDIUM 3 × Ø160)	M-EF4-0400 (MEDIUM 4 × Ø160)	M-EF4-5000 (MEDIUM 5 × Ø125)
ARYG12LHTBP ARYG14LHTBP	S-EF6-0020 (SMALL 2 × Ø200)	S-EF6-0300 (SMALL 3 × Ø160)	S-EF6-0400* (SMALL 4 × Ø160)	S-EF6-5000* (SMALL 5 × Ø125)
ARYG18LHTBP ARYG24LHTBP ARYG30LHTBP	ON REQUEST	M-EF7-0030 (MEDIUM 3 × Ø200)	M-EF7-0400 (MEDIUM 4 × Ø160)	M-EF7-0500* (MEDIUM 5 × Ø160)

*One of the zone collars is on the short side.

PLENUM EASY - HITACHI

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
RPI-0.4FSN5E	S-EI16-0200 (SMALL 2 × Ø160)	S-EI16-3000 (SMALL 3 × Ø125)	S-EI16-4000 (SMALL 4 × Ø125)	ON REQUEST
RPI-0.6FSN5E RPI-0.8FSN5E RPI-1.0FSN5E RPI-1.5FSN5E	L-EI17-0020 (LARGE 2 × Ø200)	L-EI17-0300 (LARGE 3 × Ø160)	L-EI17-0400 (LARGE 4 × Ø160)	L-EI17-0500 (LARGE 5 × Ø160)
RPI-2.0FSN5E RPI-2.5FSN5E RPI-3.0FSN5E	L-EI18-0020 (LARGE 2 × Ø200)	L-EI18-0300 (LARGE 3 × Ø160)	L-EI18-0400 (LARGE 4 × Ø160)	L-EI18-0500 (LARGE 5 × Ø160)
RPIM-0.6FSN4E RPIM-0.8FSN4E RPIM-1.0FSN4E RPIM-1.5FSN4E	S-EI19-0020 (SMALL 2 × Ø200)	S-EI19-0300 (SMALL 3 × Ø160)	S-EI19-4000* (SMALL 4 × Ø160)	ON REQUEST
RAD-50RPE RAD-60RPE RAD-50PPA RAD-60PPA RAD-50PPD RAD-60PPD	ON REQUEST	M-EI20-0030 (MEDIUM 3 × Ø200)	M-EI20-0400 (MEDIUM 4 × Ø160)	M-EI20-0500* (MEDIUM 5 × Ø160)

PLENUM EASY - DAIKIN

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
FBA35-50A FBQ35-50D FXSQ40-50A	S-ED1-0020 (SMALL 2 × Ø200)	S-ED1-0300 (SMALL 3 × Ø160)	S-ED1-0400* (SMALL 4 × Ø160)	S-ED1-5000* (SMALL 5 × Ø125)
FBA60-71A FBQ60-71D FXSQ63-80A	M-ED2-0020 (MEDIUM 2 × Ø200)	M-ED2-0300 (MEDIUM 3 × Ø160)	M-ED2-0400 (MEDIUM 4 × Ø160)	M-ED2-0500* (MEDIUM 5 × Ø160)
FDXM25-35F FDXM25-35F3 FDXM25-35F9 FDXS25-35F FXDQ15-32A FXDQ15-32A3	S-ED3-0020 (SMALL 2 × Ø200)	S-ED3-0300 (SMALL 3 × Ø160)	S-ED3-0400* (SMALL 4 × Ø160)	ON REQUEST
FDXS50F FXDQ40-50A FXDQ40-50A3	M-ED4-0020 (MEDIUM 2 × Ø200)	M-ED4-0300 (MEDIUM 3 × Ø160)	M-ED4-0400 (MEDIUM 4 × Ø160)	M-ED4-0500* (MEDIUM 5 × Ø160)
FDXM50-60F FDXM50-60F3 FDXM50-60F9 FDXS60F FDXS-50F9 FXDQ63A FXDQ63A3	L-ED5-0002 (LARGE 2 × Ø250)	L-ED5-0030 (LARGE 3 × Ø200)	L-ED5-0400 (LARGE 4 × Ø160)	L-ED5-0500 (LARGE 5 × Ø160)
FXSQ40-50P	S-ED6-0020 (SMALL 2 × Ø200)	S-ED6-0300 (SMALL 3 × Ø160)	S-ED6-0400* (SMALL 4 × Ø160)	S-ED6-5000* (SMALL 5 × Ø125)
FXSQ63-80P	M-ED7-0002 (MEDIUM 2 × Ø250)	M-ED7-0030 (MEDIUM 3 × Ø200)	M-ED7-0400 (MEDIUM 4 × Ø160)	M-ED7-0500* (MEDIUM 5 × Ø160)

*One of the zone collars is on the short side.

PLENUM EASY - MITSUBISHI ELECTRIC

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
SEZ-KD25VAL SEZ-M25DAL	S-EE3-0200 (SMALL 2 × Ø160)	S-EE3-0300 (SMALL 3 × Ø160)	S-EE3-4000 (SMALL 4 × Ø125)	ON REQUEST
SEZ-KD35VAL SEZ-M35DAL SEZ-KD50VAL SEZ-M50DAL	M-EE4-0020 (MEDIUM 2 × Ø200)	M-EE4-0300 (MEDIUM 3 × Ø160)	M-EE4-0400 (MEDIUM 4 × Ø160)	ON REQUEST
SEZ-KD60VAL SEZ-M60DAL SEZ-KD71VAL SEZ-M71DAL	ON REQUEST	L-EE5-0300 (LARGE 3 × Ø160)	L-EE5-0400 (LARGE 4 × Ø160)	L-EE5-0500 (LARGE 5 × Ø160)
PEFY-P 20/25/32 VMA-E	S-EE13-0200 (SMALL 2 × Ø160)	S-EE13-0300 (SMALL 3 × Ø160)	S-EE13-4000 (SMALL 4 × Ø125)	ON REQUEST
PEFY-P 40/50 VMA-E PEAD-RP35JAQ	M-EE14-0020 (MEDIUM 2 × Ø200)	M-EE14-0300 (MEDIUM 3 × Ø160)	M-EE14-0400 (MEDIUM 4 × Ø160)	M-EE14-0500* (MEDIUM 5 × Ø160)
PEFY-P 63/71/80 VMA-E PEAD-RP60JAQ PEAD-RP71JAQ	ON REQUEST	L-EE15-0030 (LARGE 3 × Ø200)	L-EE15-0400 (LARGE 4 × Ø160)	L-EE15-0500 (LARGE 5 × Ø160)

EASY PLENUM - MIDEA - UNDER development, for info **PLEASE** contact the company

*One of the zone collars is on the short side.

PLENUM EASY - MITSUBISHI HEAVY INDUSTRIES

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
FDUM50VF	S-EM13-0200 (SMALL 2 × Ø160)	S-EM13-0300 (SMALL 3 × Ø160)	S-EM13-4000 (SMALL 4 × Ø125)	ON REQUEST
FDUM60VF FDUM71VF	M-EM14-0020 (MEDIUM 2 × Ø200)	M-EM14-0300 (MEDIUM 3 × Ø160)	M-EM14-0400 (MEDIUM 4 × Ø160)	M-EM14-0500* (MEDIUM 5 × Ø160)
SRR 25AM-S SRR 35ZM-S	ON REQUEST	S-EM21-0030* (SMALL 3 × Ø200)	M-EM21-0040* (MEDIUM 4 × Ø200)	M-EM21-0500* (MEDIUM 5 × Ø160)
SRR 50AM-S SRR 60ZM-S	ON REQUEST	M-EM22-0030 (MEDIUM 3 × Ø200)	M-EM22-0400 (MEDIUM 4 × Ø160)	M-EM22-0500* (MEDIUM 5 × Ø160)

PLENUM EASY - HAIER

MACHINE MODEL	2 OUTLETS	3 OUTLETS	4 OUTLETS	5 OUTLETS
	code	code	code	code
AD35S2SM3FA	S-EH26-0020 (SMALL 2 × Ø200)	S-EH26-0300 (SMALL 3 × Ø160)	S-EH26-0400* (SMALL 4 × Ø160)	S-EH26-5000* (SMALL 5 × Ø125)
AD50S2SM1FA AD71S2SM1FA	ON REQUEST	M-EH27-0030 (MEDIUM 3 × Ø200)	M-EH27-0400 (MEDIUM 4 × Ø160)	M-EH27-0500* (MEDIUM 5 × Ø160)
AD50S2SM3FA AD71S2SM3FA	ON REQUEST	L-EH28-0030 (LARGE 3 × Ø200)	L-EH28-0400 (LARGE 4 × Ø160)	L-EH28-0500 (LARGE 5 × Ø160)

ACCESSORIES

ADF-FIX1	Belt (l=5m) for clamping PVC plenums for ductable units
-----------------	---

pvc delivery plenums - regolo and regolo plus series

The REGOLO and REGOLO PLUS temperature control systems allow cost-effective temperature control in several zones of the home starting from a single ducted indoor unit.


The splitting into zones and the independent management of the air conditioning of each zone avoids the need for several split indoor units. It also ensures a high level of environmental comfort, thanks to the quiet operation of the ducted air diffusion system.

The installation of this system is very simple, as all wiring and configurations (wireless or wired) are completed directly at the factory.


The REGOLO and REGOLO PLUS systems consist of the following devices:

- PVC delivery plenum with sizes identical to the corresponding ones of the EASY series;
- Electronic PCB (with Regolo 2.0 PCB for "REGOLO" plenums and Regolo PLUS 2.0 PCB for "REGOLO PLUS" plenums);
- Motorised dampers (available Ø160, Ø200 and Ø250mm);
- Wireless/wired chronothermostats (optional).

SMALL REGOLO
Up to 3 Ø160mm front dampers +
1 side damper



MEDIUM REGOLO
Up to 4 Ø160mm front dampers +
1 side damper



LARGE REGOLO
Up to 5 Ø160mm front dampers +
1 side damper



*=BYPASS OUTLET

REGOLO 2.0 ELECTRONIC PCB SYSTEM

FUNCTIONS:

- Zone management for up to 6 climate zones with motor-driven proportional bypass;
- Possibility of managing up to 6 On/Off inputs for commercial and/or standard thermostats;
- Auxiliary input/output for:
 - a) Machine consent*;
 - b) Window sensor;
 - c) Smoke sensor.
- Integrated 12V-220V transformer on the control card;
- Quick-connect terminal blocks;
- Wireless mode for operation with chronothermostats (rechargeable power supply batteries).

*If the ducted indoor unit offers this function.

DESCRIPTION

The REGOLO system allows the separate management of the zones created with the room thermostats: each time a damper receives a signal, it allows air to reach the zone of reference.

When the desired temperature (set on the thermostat) is reached, the damper will configure itself in such a way to prevent air to reach the zone of reference.

Operation can be programmed with a weekly program that can be set using the chronothermostats.

BYPASS MODE MANAGEMENT

The function of the bypass is to manage, proportionally to the number of dampers, the excess air from the indoor unit.

The motorised bypass provides for: full opening (90°), partial opening at 67.5°, 45° and 22.5°, and full closing.

The opening level depends on both the number of active channels and the number of enabled channels.

When all channels are in demand, the bypass output is closed, while when no channel is in demand, the bypass output is fully open.

REGOLO PLUS 2.0 ELECTRONIC PCB SYSTEM

DESCRIPTION

The advanced REGOLO PLUS system allows greater control over the ducted delivery air flows of the various climate zones. In addition to retaining all the features of the REGOLO system, with the REGOLO PLUS it is also possible to set and adjust the opening of each individual motorised damper, with significant increase in acoustic and climate comfort, as the regulation of the air flow takes place upstream of the system.

In fact, the display shows all the parameters required by the technician when customising and programming the system.

REGOLO PLUS system combined with EC brushless fan coils

The most important new feature of the REGOLO PLUS system is undoubtedly the possibility of flow rate modulation connection with brushless fan coils and EC fans.

Thanks to the possibility of direct interface with the indoor machine, the plus system can:

- Set the maximum and minimum operating flow rate;
- Switch the machine on and off;
- Modulate the fan speed according to the active climate zones (0-10V);
- Set the opening (in %) of each damper, ensuring perfect system regulation.

DIAGRAM OF SYSTEM WITH 4 CLIMATE ZONES

Plenum with REGOLO system, cooling mode operation.

REGOLO PLUS 2.0 control unit



PLENUM CODING EXAMPLE

S/M/L	-	R/RP	F3	-	3	0	0
S = SMALL M = MEDIUM L = LARGE	-	R = REGOLO RP = REGOLO PLUS	Ducted unit brand and model	-	Ø160 dampers (n.)	Ø200 dampers (n.)	Ø250 dampers (n.)
damper = motorised delivery damper							

KIT REGOLO/REGOLO PLUS - FUJITSU

MACHINE MODEL	2 OUTLETS		3 OUTLETS		4 OUTLETS		5 OUTLETS	
	code		code		code		code	
AR*G12LLTB AR*G14LLTB AR*G12LSLAP AR*G14LSLAP	REGOLO	S-RF3-020	REGOLO	S-RF3-300	REGOLO	S-RF3-400*	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPF3-020	REGOLO PLUS	S-RPF3-300	REGOLO PLUS	S-RPF3-400*	REGOLO PLUS	ON REQUEST
AR*G18LLTB AR*G18LSLAP	REGOLO	M-RF4-020	REGOLO	M-RF4-300	REGOLO	M-RF4-400	REGOLO	M-RF4-500*
	REGOLO PLUS	M-RPF4-020	REGOLO PLUS	M-RPF4-300	REGOLO PLUS	M-RPF4-400	REGOLO PLUS	M-RPF4-500*
ARYG12LHTBP ARYG14LHTBP	REGOLO	S-RF6-020	REGOLO	S-RF6-300	REGOLO	S-RF6-400*	REGOLO	M-RF6-500*
	REGOLO PLUS	S-RPF6-020	REGOLO PLUS	S-RPF6-300	REGOLO PLUS	S-RPF6-400*	REGOLO PLUS	M-RPF6-500*
ARYG18LHTBP ARYG24LHTBP ARYG30LHTBP	REGOLO	ON REQUEST	REGOLO	M-RF7-030	REGOLO	M-RF7-400	REGOLO	M-RF7-500*
	REGOLO PLUS	ON REQUEST	REGOLO PLUS	M-RPF7-030	REGOLO PLUS	M-RPF7-400	REGOLO PLUS	M-RPF7-500*

KIT REGOLO/REGOLO PLUS - HITACHI

MACHINE MODEL	2 OUTLETS		3 OUTLETS		4 OUTLETS		5 OUTLETS	
	code		code		code		code	
RPI-0.4FSN5E	REGOLO	S-RI16-200	REGOLO	S-RI16-300	REGOLO	ON REQUEST	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPI16-200	REGOLO PLUS	S-RPI16-300	REGOLO PLUS	ON REQUEST	REGOLO PLUS	ON REQUEST
RPI-0.6FSN5E RPI-0.8FSN5E RPI-1.0FSN5E RPI-1.5FSN5E	REGOLO	L-RI17-020	REGOLO	L-RI17-300	REGOLO	L-RI17-400	REGOLO	ON REQUEST
	REGOLO PLUS	L-RPI17-020	REGOLO PLUS	L-RPI17-300	REGOLO PLUS	L-RPI17-400	REGOLO PLUS	ON REQUEST
RPI-2.0FSN5E RPI-2.5FSN5E RPI-3.0FSN5E	REGOLO	L-RI18-020	REGOLO	L-RI18-300	REGOLO	L-RI18-400	REGOLO	L-RI18-500*
	REGOLO PLUS	L-RPI18-020	REGOLO PLUS	L-RPI18-300	REGOLO PLUS	L-RPI18-400	REGOLO PLUS	L-RPI18-500*
RPIM-0.6FSN4E RPIM-0.8FSN4E RPIM-1.0FSN4E RPIM-1.5FSN4E	REGOLO	S-RI19-200	REGOLO	S-RI19-300	REGOLO	S-RI19-400*	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPI19-200	REGOLO PLUS	S-RPI19-300	REGOLO PLUS	S-RPI19-400*	REGOLO PLUS	ON REQUEST
RAD-50RPE RAD-60RPE RAD-50PPA RAD-60PPA RAD-50PPD RAD-60PPD	REGOLO	M-RI20-020	REGOLO	M-RI20-300	REGOLO	M-RI20-400	REGOLO	M-RI20-500*
	REGOLO PLUS	M-RPI20-020	REGOLO PLUS	M-RPI20-300	REGOLO PLUS	M-RPI20-400	REGOLO PLUS	M-RPI20-500*

*One of the zone dampers is on the short side.

*It is possible to add a side damper on the short side to obtain the 6th climate zone: ON REQUEST

KIT REGOLO/REGOLO PLUS - DAIKIN

MACHINE MODEL	2 OUTLETS		3 OUTLETS		4 OUTLETS		5 OUTLETS	
	code		code		code		code	
FBA35-50A FBQ35-50D FXSQ40-50A	REGOLO	S-RD1-020	REGOLO	S-RD1-300	REGOLO	S-RD1-400*	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPD1-020	REGOLO PLUS	S-RPD1-300	REGOLO PLUS	S-RPD1-400*	REGOLO PLUS	
FBA60-71A FBQ60-71D FXSQ63-80A	REGOLO	M-RD2-020	REGOLO	M-RD2-300	REGOLO	M-RD2-400	REGOLO	M-RD2-500*
	REGOLO PLUS	M-RPD2-020	REGOLO PLUS	M-RPD2-300	REGOLO PLUS	M-RPD2-400	REGOLO PLUS	M-RPD2-500*
FDM25-35F FDM25-35F3 FDM25-35F9 FDXS25-35F FXDQ15-32A FXDQ15-32A3	REGOLO	S-RD3-020	REGOLO	S-RD3-300	REGOLO	S-RD3-400*	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPD3-020	REGOLO PLUS	S-RPD3-300	REGOLO PLUS	S-RPD3-400*	REGOLO PLUS	
FDXS50F FXDQ40-50A FXDQ40-50A3	REGOLO	M-RD4-020	REGOLO	M-RD4-300	REGOLO	M-RD4-400	REGOLO	ON REQUEST
	REGOLO PLUS	M-RPD4-020	REGOLO PLUS	M-RPD4-300	REGOLO PLUS	M-RPD4-400	REGOLO PLUS	
DXM50-60F FDM50-60F3 FDM50-60F9 FDXS60F FDXS-50F9 FXDQ63A FXDQ63A3	REGOLO	L-RD5-020	REGOLO	L-RD5-300	REGOLO	L-RD5-400	REGOLO	L-RD5-500*
	REGOLO PLUS	L-RPD5-020	REGOLO PLUS	L-RPD5-300	REGOLO PLUS	L-RPD5-400	REGOLO PLUS	L-RPD5-500*
FXSQ40-50P	REGOLO	S-RD6-020	REGOLO	S-RD6-300	REGOLO	S-RD6-400*	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPD6-020	REGOLO PLUS	S-RPD6-300	REGOLO PLUS	S-RPD6-400*	REGOLO PLUS	
FXSQ63-80P	REGOLO	ON REQUEST	REGOLO	M-RD7-030	REGOLO	M-RD7-400	REGOLO	M-RD7-500*
	REGOLO PLUS		REGOLO PLUS	M-RPD7-030	REGOLO PLUS	M-RPD7-400	REGOLO PLUS	M-RPD7-500*

KIT REGOLO/REGOLO PLUS - MITSUBISHI ELECTRIC

MACHINE MODEL	2 OUTLETS		3 OUTLETS		4 OUTLETS		5 OUTLETS	
	code		code		code		code	
SEZ-KD25VAL SEZ-M25DAL	REGOLO	S-RE3-200	REGOLO	S-RE3-300	REGOLO	S-RE3-400*	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPE3-200	REGOLO PLUS	S-RPE3-300	REGOLO PLUS	S-RPE3-400*	REGOLO PLUS	
SEZ-KD35VAL SEZ-M35DAL SEZ-KD50VAL SEZ-M50DAL	REGOLO	M-RE4-020	REGOLO	M-RE4-300	REGOLO	M-RE4-400	REGOLO	ON REQUEST
	REGOLO PLUS	M-RPE4-020	REGOLO PLUS	M-RPE4-300	REGOLO PLUS	M-RPE4-400	REGOLO PLUS	
SEZ-KD60VAL SEZ-M60DAL SEZ-KD71VAL SEZ-M71DAL	REGOLO	L-RE5-020	REGOLO	L-RE5-300	REGOLO	L-RE5-400	REGOLO	L-RE5-500*
	REGOLO PLUS	L-RPE5-020	REGOLO PLUS	L-RPE5-300	REGOLO PLUS	L-RPE5-400	REGOLO PLUS	L-RPE5-500*
PEFY-P 20/25/32 VMA-E	REGOLO	S-RE13-200	REGOLO	S-RE13-300	REGOLO	S-RE13-400*	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPE13-200	REGOLO PLUS	S-RPE13-300	REGOLO PLUS	S-RPE13-400*	REGOLO PLUS	
PEFY-P 40/50 VMA-E PEAD-RP35JAQ	REGOLO	ON REQUEST	REGOLO	M-RE14-030	REGOLO	M-RE14-400	REGOLO	M-RE14-500*
	REGOLO PLUS		REGOLO PLUS	M-RPE14-030	REGOLO PLUS	M-RPE14-400	REGOLO PLUS	M-RPE14-500*
PEFY-P 63/71/80 VMA-E PEAD-RP60JAQ PEAD-RP71JAQ	REGOLO	ON REQUEST	REGOLO	L-RE15-030	REGOLO	L-RE15-400	REGOLO	L-RE15-500*
	REGOLO PLUS		REGOLO PLUS	L-RPE15-030	REGOLO PLUS	L-RPE15-400	REGOLO PLUS	L-RPE15-500*

KIT REGOLO/REGOLO PLUS - MITSUBISHI HEAVY INDUSTRIES

MACHINE MODEL	2 OUTLETS		3 OUTLETS		4 OUTLETS		5 OUTLETS	
	code		code		code		code	
FDUM50VF	REGOLO	S-RM13-200	REGOLO	S-RM13-300	REGOLO	S-RM13-400*	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPM13-200	REGOLO PLUS	S-RPM13-300	REGOLO PLUS	S-RPM13-400*	REGOLO PLUS	ON REQUEST
FDUM60VF FDUM71VF	REGOLO	M-RM14-020	REGOLO	M-RM14-300	REGOLO	M-RM14-400	REGOLO	M-RM14-500*
	REGOLO PLUS	M-RPM14-020	REGOLO PLUS	M-RPM14-300	REGOLO PLUS	M-RPM14-400	REGOLO PLUS	M-RPM14-500*
SRR 25AM-S SRR 35ZM-S	REGOLO	S-RM21-020	REGOLO	S-RM21-300	REGOLO	S-RM21-400*	REGOLO	ON REQUEST
	REGOLO PLUS	S-RPM21-020	REGOLO PLUS	S-RPM21-300	REGOLO PLUS	S-RPM21-400*	REGOLO PLUS	ON REQUEST
SRR 50AM-S SRR 60ZM-S	REGOLO	M-RM22-020	REGOLO	M-RM22-300	REGOLO	M-RM22-400	REGOLO	M-RM22-500*
	REGOLO PLUS	M-RPM22-020	REGOLO PLUS	M-RPM22-300	REGOLO PLUS	M-RPM22-400	REGOLO PLUS	M-RPM22-500*

KIT REGOLO/REGOLO PLUS - HAIER

MACHINE MODEL	2 OUTLETS		3 OUTLETS		4 OUTLETS		5 OUTLETS	
	code		code		code		code	
AD35S2SM3FA	REGOLO	S-RH26-020	REGOLO	S-RH26-300	REGOLO	S-RH26-400*	REGOLO	M-RH26-500*
	REGOLO PLUS	S-RPH26-020	REGOLO PLUS	S-RPH26-300	REGOLO PLUS	S-RPH26-400*	REGOLO PLUS	M-RPH26-500*
AD50S2SM1FA AD71S2SM1FA	REGOLO	M-RH27-020	REGOLO	M-RH27-030	REGOLO	M-RH27-400	REGOLO	M-RH27-500*
	REGOLO PLUS	M-RPH27-020	REGOLO PLUS	M-RPH27-030	REGOLO PLUS	M-RPH27-400	REGOLO PLUS	M-RPH27-500*
AD50S2SM3FA AD71S2SM3FA	REGOLO	L-RH28-020	REGOLO	L-RH28-030	REGOLO	L-RH28-400	REGOLO	L-RH28-500*
	REGOLO PLUS	L-RPH28-020	REGOLO PLUS	L-RPH28-030	REGOLO PLUS	L-RPH28-400	REGOLO PLUS	L-RPH28-500*

REGOLO/REGOLO PLUS KIT - MIDEA under development, for info please contact the company

*One of the zone dampers is on the short side.

*It is possible to add a side damper on the short side to obtain the 6th climate zone: ON REQUEST

wired chronothermostat



image with plate (plate not supplied)

Wired digital control chronothermostat -REGOLO-CF wired digital control chronothermostat powered by the Regolo control unit. Suitable for wall (flush-mounted) installation, it is used to manage the temperatures of the various zones of the home by setting the opening and closing time bands of the servomotors that will move the dampers to facilitate or prevent the passage of air.

It can be used in REGOLO/REGOLO PLUS systems to control the servomotors of dampers installed on plenums combined with ducted units of various brands.

It also gives the possibility of bypassing time programs by forcing the manual closing or opening of each damper, and of changing the operating mode to heating or cooling.

Main functions of the CF chronothermostat:

- time setup and display;
- display of the ambient temperature in which it is located;
- temperature setup;
- manual operation mode (forced opening of the damper);
- operating mode according to the set temperature set-point;
- automated operation mode based on time bands (weekly programs);
- switching to cooling mode (for the summer period) and heating mode (for the winter period);
- forced closure of dampers (shutdown).

Code	Description
-REGOLO-CF	Wired digital control chronothermostat

radio chronothermostat



Wireless "chronothermostat": it sends operating commands via radio frequency; the signal sent can be received by the REGOLO/REGOLO PLUS control unit, which has the task of recognising and interpreting it, translating it into an operation to be carried out (e.g. activation and/or display). It has a large and clear display (with adjustable contrast) for monitoring all its functions in real time. Ease of programming is its key feature.

Its permanent memory contains 3 different freely settable programs, conceived for maximum comfort.

Main functions of the CR chronothermostat:

- Year, month, day, hour and minute setup.
- Display of current time or room temperature.
- Possibility of correcting the detected room temperature (OFFSET).
- Possibility of total exclusion of the absence temperature.
- Possibility of password protecting the modification of settings.
- Possibility of assignment to one or more receivers.
- Display indication of radio signal transmission.
- Total shutdown of temperature control.
- Easy matching of the transmitter to the zone, with self-learning capabilities.
- Forwarding of the " " signal to ascertain the signal presence and range.
- Forwarding of batteries almost exhausted notification to the receiver.

Code	Description
-REGOLO-CR	"Wireless" radio chronothermostat

Airsan and Airsan coated insulated antibacterial pipes

Flexible pipeline featuring exclusive technologies.

Pipe made of:

- polyolefin resin film with antibacterial and anti-mould master additives.
- closed-cell cross-linked polyethylene foam 4 mm thickn.
- external protection film of polyolefin resins with additives.
- internal harmonic steel wire spiral.

The assembly of the materials for the construction of the flexible pipeline does not involve the use of chemicals, adhesives or glues.

APPLICATIONS:

Air conditioning

Single and double flow heat recovery ventilation

Reduction of condensation and heat loss

Air conditioning systems for transport vehicles, for agricultural and industrial use.

CHARACTERISTICS

Colour: Grey

Thickness: 4 mm

Length: 10 ml

Operating temperature: -40°C +100°C

Air speed: max. 20 m/sec

Bending radius: 1.2 - 1.8 x Ø

Reaction to fire:

Class 1 (DM 26/06/84)

Class M1

Class EN B - s1, d0 (13823:2010)

Coating properties: **(for the coated Airsan version)**

Polyester thickness 25 mm, $\lambda=0.028$, $U=1.12\text{W/m}^2\text{K}$.

Airsan



Airsan coated




AIRSAN AND AIRSAN COATED PIPE

Code	Ø	Description
VML2610085	Ø 85	AIRSAN flexible pipe
VML2610102	Ø 100	with sanitized antibacterial/anti-mould internal treatment, heat-insulating coating and external resin film protection; embedded harmonic steel wire spiral.
VML2610127	Ø 125	
VML2610165	Ø 165	Designed for use in air conditioning and heat recovery ventilation systems.
VML2610203	Ø 200	IT CAN BE CLEANED WITH PROBE!
VML2610254	Ø 250	10 ml PACK
VML2610127R	Ø 125	AIRSAN COATED flexible pipeline
VML2610165R	Ø 165	with sanitized antibacterial/anti-mould internal treatment, heat-insulating coating and external resin film protection; embedded harmonic steel wire spiral. Polyester fibre thickness 25 mm covering, wrapped in an aluminium film
VML2610203R	Ø 200	vapourshielding layer.
VML2610254R	Ø 250	Designed for use in air conditioning and heat recovery ventilation systems.
		IT CAN BE CLEANED WITH PROBE!
		10 ml PACK

polycarbonate plenum - ep series

Plenum with butterfly damper
adaptable to the collar



Patented plenum with quick connector for connection to the flexible pipeline and adjustable to up to 5 different diameters. A butterfly valve is supplied as standard, capable of adapting to the selected pipeline diameter.

Thanks to the special construction and the locking clips, the installation of the flexible pipeline is quick and safe, as well as uniquely simple.

The lightness and the guide clamping system optimise the characteristics of this product and make it a viable alternative to classic galvanised sheet metal plenums. Plasterboard fixing kit available.

BENEFITS

Economical;
Extremely easy to install;
Equipped with a built-in regulation damper;
It can be used for both the delivery and the return of treated air.

EP/01 SERIES CONNECTION PLENUM

Code	Sizes [mm]	Description	For pipes Ø [mm]
-EP/01200X100	200x100	with no.1 oval rear collar with damper	Ø125
-EP/01300X100	300x100	with no. 1 modular oval rear collar with damper	Ø160/180/200
-EP/01400X100	400x100	with no. 1 modular oval rear collar with damper	Ø160/180/200
-EP/01300X150	300x150	with no. 1 modular oval rear collar with damper	Ø160/180/200
-EP/01400X150	400x150	with no. 1 modular oval rear collar with damper	Ø160/180/200/229/250
-EP/01500X150	500x150	with no. 1 modular oval rear collar with damper	Ø160/180/200/229/250
-EP/01600X150	600x150	with no. 1 modular oval rear collar with damper	Ø160/180/200/229/250
-EP/01400X200	400x200	with no. 1 modular oval rear collar with damper	Ø200/229/250
-EP/01500X200	500x200	with no. 1 modular oval rear collar with damper	Ø200/229/250
-EP/01600X200	600x200	with no. 1 modular oval rear collar with damper	Ø200/229/250

Note: With standard collars on Ø180 and Ø229 it is not possible to use the supplied damper.



fixing
clips

Code	Description
-EP/PAKIT	Plenum spring fixing kit for plasterboard

RELATED PRODUCTS:



PVC RETURN GRILLES



PVC DELIVERY VENTS

pvc plenum for grilles and vents - adf series



CONSTRUCTION MATERIAL:

Insulated anti-condensation PVC-U plenum, with collar on the long side, for the installation of vents/grilles.

All plenums are supplied with fixing and anchoring brackets. An additional optional kit is available for fixing the vent/grille with brackets and magnets (cod. ADF-FIX2).

BENEFITS

- Light;
- Extremely easy to install;
- Oval collar to reduce the overall space requirements;
- Anti-condensation and antibacterial due to the PVC composition;
- Hygienically superior to any other material of the air handling sector.



PVC PLENUM FOR GRILLES/VENTS


Code	Description	Vent sizes [mm]
ADF-40X10X16L16		400x100
ADF-30X15X16L16	PVC plenum for grilles/vents	300x150
ADF-40X15X16L16	D=160 mm with Ø160 mm oval collar on long side	400x150
ADF-40X20X16L16		400x200
ADF-40X15X20L20	PVC plenum	400x150
ADF-40X20X20L20	D=216 mm with Ø200 mm oval collar on long side	400x200

For other sizes, please contact the company


ACCESSORY

ADF-FIX2	Kit consisting of brackets + safety rope + magnets for fixing vents/grilles to the ceiling (pack of 2 brackets, 1 rope and 2 magnets, the latter installed at the factory on the vent/grille)
----------	---

SECTION LONG SIDE VIEW

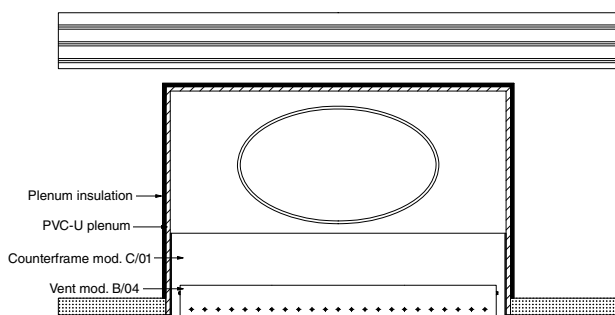

SECTION SHORT SIDE VIEW

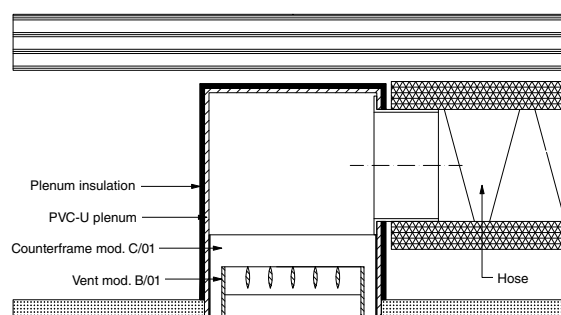

RELATED PRODUCTS:

PVC RETURN GRILLES

PVC DELIVERY VENTS



gtf return grilles pvc plenum - adf-gtf series



Anti-condensation PVC plenum, designed for the ceiling installation of the GTF model grille.

CONSTRUCTION MATERIAL: 3 mm thick anti-condensation PVC, externally insulated with PE foam, thickness 3 mm.

GTF grille (with frame and filter) to be ordered separately

BENEFITS

- Extremely easy to install;
- Customisation of collars possible;
- Anti-condensation and antibacterial due to the PVC composition.
- Hygienically superior to any other material of the air handling sector.



PVC PLENUM FOR GTF GRILLES

Code	Description	Grille sizes [mm]	Round collar Ø [mm]
ADF-GTF1230X20L		300x200	Ø125 lateral long side
ADF-GTF1630X20L	PVC plenum for GTF return grille	300x200	Ø160 lateral long side
ADF-GTF1240X20L		400x200	Ø125 lateral long side
ADF-GTF1640X20L	D=216 mm	400x200	Ø160 lateral long side
ADF-GTF1640X30L	(D: depth, corresponding to the height for ceiling plenums)	400x300	Ø160 lateral long side
ADF-GTF1660X30L		600x300	Ø160 lateral long side
ADF-GTF1660X40L		600x400	Ø160 lateral long side
ADF-GTF2060X30L		600x300	Ø200 lateral long side
ADF-GTF2060X40L	D=250 mm	600x400	Ø200 lateral long side

For other sizes, please contact the company

RELATED PRODUCTS:

RETURN GRILLE WITH FILTER FRAME AND FILTER - GTF



abs delivery vents - eb series



Vent with double row of adjustable fins, vertical at the front and horizontal at the rear

CONSTRUCTION MATERIAL: anti-condensation ABS


FIN PITCH: 20 mm

CLASS: V0

MAX. OPERATING TEMPERATURE: 60°C

AVAILABLE COLOUR: RAL 9010

FIXING METHOD: clips

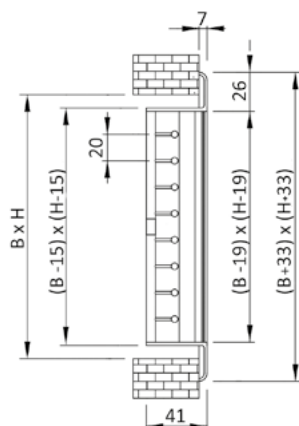

B x H = hole size (used as nominal size)

(B-15) x (H-15) = neck size

(B+33) x (H+33) = external size



Code	B x H [mm]	
-EB/01200X100	200X100	
-EB/01300X100	300X100	Anti-condensation ABS vent with double row of fins
-EB/01300X150	300X150	



Code	B x H [mm]	
-EB/01400X100	400X100	
-EB/01400X150	400X150	
-EB/01500X150	500X150	Anti-condensation ABS vent with double row of fins
-EB/01600X150	600X150	
-EB/01400X200	400X200	
-EB/01500X200	500X200	
-EB/01600X200	600X200	



RELATED PRODUCTS:

POLYCARBONATE PLENUM

pvc delivery vents - b series

The B series delivery vents are made of white RAL 9010 anti-condensation PVC and are available in four different conformations:




- B/01: double row of fins, vertical at the front* and horizontal at the rear;
- B/02: double row of fins, horizontal at the front and vertical at the rear;
- B/03: single row vertical of fins*;
- B/04: single row of horizontal fins.

*fins parallel to the short side


BENEFITS

- Anti-corrosive;
- Anti-condensation;
- Long-lasting and easy to maintain;
- Very low flammability and self-extinguishing.


MODEL B/01




MODEL B/02



MODEL B/03



MODEL B/04



External frame measurement: B+34 x H+34 [mm]

VENT CODE

B	/	01	B	X	H	B
PVC delivery vent	/	01	double row of fins, vertical at the front and horizontal at the rear	x	nominal sizes of the smaller side (hole size in mm)	RAL 9010 (white)
		02	double row of fins, horizontal at the front and vertical at the rear			
		03	single row of vertical fins			
		04	single row of horizontal fins			



RELATED PRODUCTS:

POLYCARBONATE PLENUM

REFERENCE FLOW RATE TABLE - B/01 AND B/02 SERIES

HOLE SIZE B x H [mm]	200x100	300x100	400x100	500x100	600x100	/	/	/
Q (m³/h) with s = 2.5m/s	99	153	207	261	315	/	/	/
HOLE SIZE B x H [mm]	/	300x150	400x150	500x150	600x150	700x150	800x150	/
Q (m³/h) with s = 2.5m/s	/	243	324	414	504	585	675	/
HOLE SIZE B x H [mm]	200x200	300x200	400x200	500x200	600x200	700x200	800x200	1000x200
Q (m³/h) with s = 2.5m/s	225	342	468	585	711	828	954	1197
HOLE SIZE B x H [mm]	/	300x300	400x300	500x300	600x300	/	800x300	1000x300
Q (m³/h) with s = 2.5m/s	/	531	729	918	1107	/	1494	1872
HOLE SIZE B x H [mm]	/	/	400x400	/	600x400	/	800x400	1000x400
Q (m³/h) with s = 2.5m/s	/	/	990	/	1503	/	2025	2547

REFERENCE FLOW RATE TABLE - B/03 SERIES

HOLE SIZE B x H [mm]	200x100	300x100	400x100	500x100	600x100	/	/	/
Q (m³/h) with s = 2.5m/s	117	180	243	306	369	/	/	/
HOLE SIZE B x H [mm]	/	300x150	400x150	500x150	600x150	700x150	800x150	/
Q (m³/h) with s = 2.5m/s	/	297	405	513	621	729	837	/
HOLE SIZE B x H [mm]	200x200	300x200	400x200	500x200	600x200	700x200	800x200	1000x200
Q (m³/h) with s = 2.5m/s	270	423	567	720	873	1017	1170	1467
HOLE SIZE B x H [mm]	/	300x300	400x300	500x300	600x300	/	800x300	1000x300
Q (m³/h) with s = 2.5m/s	/	657	891	1131	1368	/	1836	2313
HOLE SIZE B x H [mm]	/	/	400x400	/	600x400	/	800x400	1000x400
Q (m³/h) with s = 2.5m/s	/	/	1224	/	1863	/	2511	3159

REFERENCE FLOW RATE TABLE - B/04 SERIES

HOLE SIZE B x H [mm]	200x100	300x100	400x100	500x100	600x100	/	/	/
Q (m³/h) with s = 2.5m/s	117	189	252	215	387	/	/	/
HOLE SIZE B x H [mm]	/	300x150	400x150	500x150	600x150	700x150	800x150	/
Q (m³/h) with s = 2.5m/s	/	297	405	513	621	729	837	/
HOLE SIZE B x H [mm]	200x200	300x200	400x200	500x200	600x200	700x200	800x200	1000x200
Q (m³/h) with s = 2.5m/s	270	423	567	729	882	1035	1188	1494
HOLE SIZE B x H [mm]	/	300x300	400x300	500x300	600x300	/	800x300	1000x300
Q (m³/h) with s = 2.5m/s	/	657	900	1134	1377	/	1854	2331
HOLE SIZE B x H [mm]	/	/	400x400	/	600x400	/	800x400	1000x400
Q (m³/h) with s = 2.5m/s	/	/	1224	/	1872	/	2528	3177



DELIVERY VENTS - B SERIES

B x H hole size	B/01	B/02	B/03	B/04	Damper S/01	Counterframe C/01	n. Clips	n. Screws	n. M/01
	Code	Code	Code	Code	Code	Code	(to be ordered separately)		
200 x 100	-B/01200X100B	-B/02200X100B	-B/03200X100B	-B/04200X100B	-S/01200X100B	-C/01200X100	4	4	4
300 x 100	-B/01300X100B	-B/02300X100B	-B/03300X100B	-B/04300X100B	-S/01300X100B	-C/01300X100	4	4	4
400 x 100	-B/01400X100B	-B/02400X100B	-B/03400X100B	-B/04400X100B	-S/01400X100B	-C/01400X100	4	4	4
500 x 100	-B/01500X100B	-B/02500X100B	-B/03500X100B	-B/04500X100B	-S/01500X100B	-C/01500X100	4	4	4
600 x 100	-B/01600X100B	-B/02600X100B	-B/03600X100B	-B/04600X100B	-S/01600X100B	-C/01600X100	4	4	6
300 x 150	-B/01300X150B	-B/02300X150B	-B/03300X150B	-B/04300X150B	-S/01300X150B	-C/01300X150	4	4	4
400 x 150	-B/01400X150B	-B/02400X150B	-B/03400X150B	-B/04400X150B	-S/01400X150B	-C/01400X150	4	4	4
500 x 150	-B/01500X150B	-B/02500X150B	-B/03500X150B	-B/04500X150B	-S/01500X150B	-C/01500X150	4	4	4
600 x 150	-B/01600X150B	-B/02600X150B	-B/03600X150B	-B/04600X150B	-S/01600X150B	-C/01600X150	4	4	6
700 x 150	-B/01700X150B	-B/02700X150B	-B/03700X150B	-B/04700X150B	-S/01700X150B	-C/01700X150	6	4	6
800 x 150	-B/01800X150B	-B/02800X150B	-B/03800X150B	-B/04800X150B	-S/01800X150B	-C/01800X150	6	4	8
200 x 200	-B/01200X200B	-B/02200X200B	-B/03200X200B	-B/04200X200B	-S/01200X200B	-C/01200X200	4	4	4
300 x 200	-B/01300X200B	-B/02300X200B	-B/03300X200B	-B/04300X200B	-S/01300X200B	-C/01300X200	4	4	4
400 x 200	-B/01400X200B	-B/02400X200B	-B/03400X200B	-B/04400X200B	-S/01400X200B	-C/01400X200	4	4	4
500 x 200	-B/01500X200B	-B/02500X200B	-B/03500X200B	-B/04500X200B	-S/01500X200B	-C/01500X200	4	4	6
600 x 200	-B/01600X200B	-B/02600X200B	-B/03600X200B	-B/04600X200B	-S/01600X200B	-C/01600X200	4	4	6
700 x 200	-B/01700X200B	-B/02700X200B	-B/03700X200B	-B/04700X200B	-S/01700X200B	-C/01700X200	6	4	6
800 x 200	-B/01800X200B	-B/02800X200B	-B/03800X200B	-B/04800X200B	-S/01800X200B	-C/01800X200	6	4	8
1000 x 200	-B/011000X200B	-B/021000X200B	-B/031000X200B	-B/041000X200B	-S/011000X200B	-C/011000X200	6	8	10
300 x 300	-B/01300X300B	-B/02300X300B	-B/03300X300B	-B/04300X300B	-S/01300X300B	-C/01300X300	4	4	4
400 x 300	-B/01400X300B	-B/02400X300B	-B/03400X300B	-B/04400X300B	-S/01400X300B	-C/01400X300	4	4	4
500 x 300	-B/01500X300B	-B/02500X300B	-B/03500X300B	-B/04500X300B	-S/01500X300B	-C/01500X300	4	4	6
600 x 300	-B/01600X300B	-B/02600X300B	-B/03600X300B	-B/04600X300B	-S/01600X300B	-C/01600X300	4	4	6
800 x 300	-B/01800X300B	-B/02800X300B	-B/03800X300B	-B/04800X300B	-S/01800X300B	-C/01800X300	6	4	8
1000 x 300	-B/011000X300B	-B/021000X300B	-B/031000X300B	-B/041000X300B	-S/011000X300B	-C/011000X300	6	8	10
400 x 400	-B/01400X400B	-B/02400X400B	-B/03400X400B	-B/04400X400B	-S/01400X400B	-C/01400X400	4	4	4
600 x 400	-B/01600X400B	-B/02600X400B	-B/03600X400B	-B/04600X400B	-S/01600X400B	-C/01600X400	4	4	6
800 x 400	-B/01800X400B	-B/02800X400B	-B/03800X400B	-B/04800X400B	-S/01800X400B	-C/01800X400	6	4	8
1000 x 400	-B/011000X400B	-B/021000X400B	-B/031000X400B	-B/041000X400B	-S/011000X400B	-C/011000X400	6	8	10

M/01: M/01 type magnets

Clips (plastic) = standard fixing system; fixing with **screws** or **magnets** subject to special order

S/01 damper see description on next page

C/01 counterframe see description on next page

pvc return grilles with 45° fins - g-series

The G series return grilles (with 45° tilted fins) are made of RAL 9010 white anti-condensation PVC and are available in two different conformations:



- G/01: fixed horizontal fins* tilted at 45°;
- G/02: fixed vertical fins** tilted at 45°.


* parallel to the long side

** parallel to the short side

BENEFITS


- Anti-corrosive;
- Anti-condensation;
- Long-lasting and easy to maintain;
- Very low flammability and self-extinguishing.

MODEL G/01



External frame measurement: B+34 x H+34 [mm]

MODEL G/02



GRILLE CODING

G	/	01		B	X	H	B
PVC RETURN GRILLE	/	01	single row of fixed horizontal fins tilted at 45°	nominal sizes of the long side (hole size in mm)	x	nominal sizes of the short side (hole size in mm)	RAL 9010 (white)
		02	single row of fixed vertical fins tilted at 45°				

N.B: the catalogue pictures refer to the 300x100mm size for both models. Standard fixing is with plastic clips (to be ordered separately). A special order must be made for fixing with screws or magnets.

ACCESSORIES:

REGULATION DAMPER - MODEL S/01




Contrast damper with opposite movement.
CONSTRUCTION MATERIAL: anti-condensation PVC and bayblend.
CLASS: V0.
FIXING METHOD: Directly on the grilles or with screws on the plenum.
COLOUR: RAL 9010

COUNTERFRAME - MODEL C/01



Fixing counterframe.
CONSTRUCTION MATERIAL: Sheet metal.
FIXING METHOD: Direct on the plenum or channel.

BIRD/INSECT SCREEN FOR RETURN GRILLES - MODEL R/02



Bird/insect screen for outdoor grilles
MATERIAL: polyester
FIXING METHOD: standard on grille neck
PITCH: 10 mm (size 10x10 mm)

REFERENCE FLOW RATE TABLE - G/01 SERIES

HOLE SIZE B x H [mm]	200x100	300x100	400x100	500x100	600x100	/	800x100	/
Q (m³/h) with s = 2m/s	30	42	57	72	88	/	117	/
HOLE SIZE B x H [mm]	/	300x150	400x150	500x150	600x150	700x150	800x150	/
Q (m³/h) with s = 2m/s	/	84	114	144	174	204	235	/
HOLE SIZE B x H [mm]	200x200	300x200	400x200	500x200	600x200	700x200	800x200	1000x200
Q (m³/h) with s = 2m/s	84	125	171	216	261	307	352	445
HOLE SIZE B x H [mm]	/	300x300	400x300	500x300	600x300	/	800x300	1000x300
Q (m³/h) with s = 2m/s	/	208	284	359	435	/	586	737
HOLE SIZE B x H [mm]	/	/	400x400	/	600x400	/	800x400	1000x400
Q (m³/h) with s = 2m/s	/	/	403	/	609	/	821	1032
HOLE SIZE B x H [mm]	/	/	/	500x500	/	/	800x500	1000x500
Q (m³/h) with s = 2m/s	/	/	/	647	/	/	1055	1327
HOLE SIZE B x H [mm]	/	/	/	/	595x595*	/	/	/
Q (m³/h) with s = 2m/s	/	/	/	/	814	/	/	/
HOLE SIZE B x H [mm]	/	/	/	/	600x600	/	800x600	1000x600
Q (m³/h) with s = 2m/s	/	/	/	/	958	/	1290	1622

*Size for square tile ceilings, the only ones in which the measurements shown are external in mm. Be careful not to confuse with the 600x600mm hole size.

REFERENCE FLOW RATE TABLE - G/02 SERIES

HOLE SIZE B x H [mm]	200x100	300x100	400x100	500x100	600x100	/	800x100	/
Q (m³/h) with s = 2m/s	35	58	86	108	130	/	173	/
HOLE SIZE B x H [mm]	/	300x150	400x150	500x150	600x150	700x150	800x150	/
Q (m³/h) with s = 2m/s	/	101	137	173	209	252	288	/
HOLE SIZE B x H [mm]	200x200	300x200	400x200	500x200	600x200	700x200	800x200	1000x200
Q (m³/h) with s = 2m/s	84	137	187	245	295	346	403	503
HOLE SIZE B x H [mm]	/	300x300	400x300	500x300	600x300	/	800x300	1000x300
Q (m³/h) with s = 2m/s	/	208	295	374	461	/	626	792
HOLE SIZE B x H [mm]	/	/	400x400	/	600x400	/	800x400	1000x400
Q (m³/h) with s = 2m/s	/	/	403	/	626	/	857	1080
HOLE SIZE B x H [mm]	/	/	/	500x500	/	/	800x500	1000x500
Q (m³/h) with s = 2m/s	/	/	/	647	/	/	1080	1368
HOLE SIZE B x H [mm]	/	/	/	/	595x595*	/	/	/
Q (m³/h) with s = 2m/s	/	/	/	/	814	/	/	/
HOLE SIZE B x H [mm]	/	/	/	/	600x600	/	800x600	1000x600
Q (m³/h) with s = 2m/s	/	/	/	/	958	/	1310	1656

*Size for square tile ceilings, the only ones in which the measurements shown are external in mm. Be careful not to confuse with the 600x600mm hole size.




RETURN GRILLES - G SERIES

B x H hole size	G/01 Code	G/02 Code	Insect screen Code	Damper Code	Counterframe Code	n. Clips (to be ordered separately)	n. Screws	n. M/01
200 x 100	-G/01200X100B	-G/02200X100B	-R/02200X100	-S/01200X100B	-C/01200X100	4	4	4
300 x 100	-G/01300X100B	-G/02300X100B	-R/02300X100	-S/01300X100B	-C/01300X100	4	4	4
400 x 100	-G/01400X100B	-G/02400X100B	-R/02400X100	-S/01400X100B	-C/01400X100	4	4	4
500 x 100	-G/01500X100B	-G/02500X100B	-R/02500X100	-S/01500X100B	-C/01500X100	4	4	4
600 x 100	-G/01600X100B	-G/02600X100B	-R/02600X100	-S/01600X100B	-C/01600X100	4	4	6
800 x 100	-G/01800X100B	-G/02800X100B	-R/02800X100	On request	On request	6	4	8
300 x 150	-G/01300X150B	-G/02300X150B	-R/02300X150	-S/01300X150B	-C/01300X150	4	4	4
400 x 150	-G/01400X150B	-G/02400X150B	-R/02400X150	-S/01400X150B	-C/01400X150	4	4	4
500 x 150	-G/01500X150B	-G/02500X150B	-R/02500X150	-S/01500X150B	-C/01500X150	4	4	4
600 x 150	-G/01600X150B	-G/02600X150B	-R/02600X150	-S/01600X150B	-C/01600X150	4	4	6
700 x 150	-G/01700X150B	-G/02700X150B	-R/02700X150	-S/01700X150B	-C/01700X150	6	4	6
800 x 150	-G/01800X150B	-G/02800X150B	-R/02800X150	-S/01800X150B	-C/01800X150	6	4	8
200 x 200	-G/01200X200B	-G/02200X200B	-R/02200X200	-S/01200X200B	-C/01200X200	4	4	4
300 x 200	-G/01300X200B	-G/02300X200B	-R/02300X200	-S/01300X200B	-C/01300X200	4	4	4
400 x 200	-G/01400X200B	-G/02400X200B	-R/02400X200	-S/01400X200B	-C/01400X200	4	4	4
500 x 200	-G/01500X200B	-G/02500X200B	-R/02500X200	-S/01500X200B	-C/01500X200	4	4	6
600 x 200	-G/01600X200B	-G/02600X200B	-R/02600X200	-S/01600X200B	-C/01600X200	4	4	6
700 x 200	-G/01700X200B	-G/02700X200B	-R/02700X200	-S/01700X200B	-C/01700X200	6	4	6
800 x 200	-G/01800X200B	-G/02800X200B	-R/02800X200	-S/01800X200B	-C/01800X200	6	4	8
1000 x 200	-G/011000X200B	-G/021000X200B	-R/021000X200	-S/011000X200B	-C/011000X200	6	8	10
300 x 300	-G/01300X300B	-G/02300X300B	-R/02300X300	-S/01300X300B	-C/01300X300	4	4	4
400 x 300	-G/01400X300B	-G/02400X300B	-R/02400X300	-S/01400X300B	-C/01400X300	4	4	4
500 x 300	-G/01500X300B	-G/02500X300B	-R/02500X300	-S/01500X300B	-C/01500X300	4	4	6
600 x 300	-G/01600X300B	-G/02600X300B	-R/02600X300	-S/01600X300B	-C/01600X300	4	4	6
800 x 300	-G/01800X300B	-G/02800X300B	-R/02800X300	-S/01800X300B	-C/01800X300	6	4	8
1000 x 300	-G/011000X300B	-G/021000X300B	-R/021000X300	-S/011000X300B	-C/011000X300	6	8	10
400 x 400	-G/01400X400B	-G/02400X400B	-R/02400X400	-S/01400X400B	-C/01400X400	4	4	4
600 x 400	-G/01600X400B	-G/02600X400B	-R/02600X400	-S/01600X400B	-C/01600X400	4	4	6
800 x 400	-G/01800X400B	-G/02800X400B	-R/02800X400	-S/01800X400B	-C/01800X400	6	4	8
1000 x 400	-G/011000X400B	-G/021000X400B	-R/021000X400	-S/011000X400B	-C/011000X400	6	8	10
500 x 500	-G/01500X500B	-G/02500X500B	-R/02500X500	On request	On request	4	4	4
800 x 500	-G/01800X500B	-G/02800X500B	-R/02800X500	On request	On request	6	4	8
1000 x 500	-G/011000X500B	-G/021000X500B	-R/021000X500	On request	On request	6	8	10
595 x 595*	-G/01595X595B	-G/02595X595B	-R/02595X595	On request	On request	4	4	8
600 x 600	-G/01600X600B	-G/02600X600B	-R/02600X600	On request	On request	4	4	8
800 x 600	-G/01800X600B	-G/02800X600B	-R/02800X600	On request	On request	6	4	10
1000 x 600	-G/011000X600B	-G/021000X600B	-R/021000X600	On request	On request	6	8	10

*Size for square tile ceilings, the only ones in which the measurements shown are external in mm.

FIXING WITH CLIPS (standard fixing)



FIXING WITH SCREWS



FIXING WITH MAGNETS type M/01



**PVC return grilles with 45° fins - G-series**

The G series return grilles (with 45° tilted fins) are made of RAL 9010 white anti-condensation PVC and are available in two different conformations: fixed horizontal fins tilted at 45° (-G/01) and fixed vertical fins tilted at 45° (- G/02).

pvc return air grilles with filter frame - gtf series

The GTF series return grilles with filter frame are made of white RAL 9010 anti-condensation PVC; they include a filter frame with Velcro filter fixing technology, which allows for quick and easy maintenance.

The options for fixing the grille to the filter frame are listed below in the product code configuration.



BENEFITS

- Anti-corrosive;
- Anti-condensation;
- Long-lasting and easy to maintain;
- Very low flammability and self-extinguishing.

GRILLE CODING

GTF	/	0		6		B	X	H	B
PVC return grille with filter frame and filter	/	0	grille with 45° tilted fins parallel to the long side	6=	automatic concealed fixing by means of magnets and safety cables	nominal sizes of the largest side (internal measurement of the counterframe)	x	nominal sizes of the smaller side (internal measurement of the counterframe)	RAL 9010 (white)




GTF/06
automatic concealed system



detail with filter frame fixing bracket (included)



Filter media, Velcro fastening and extraction rope (included)

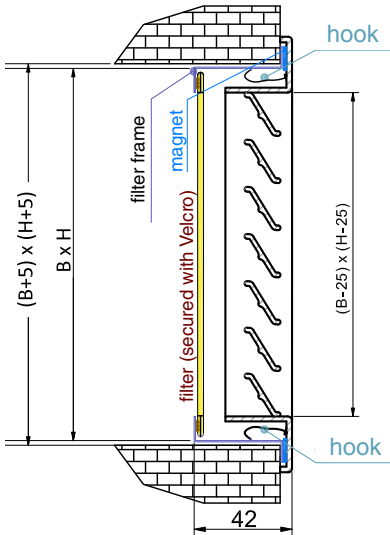

The dimensional drawing shows the G/01 model fixed to the filter frame

REFERENCE FLOW RATE TABLE - GTF/06 SERIES

HOLE SIZE B x H [mm]	200x100	300x100	400x100	500x100	600x100	/	800x100	/
Q (m³/h) with s = 2m/s	30	42	57	72	88	/	117	/
HOLE SIZE B x H [mm]	/	300x150	400x150	500x150	600x150	700x150	800x150	/
Q (m³/h) with s = 2m/s	/	84	114	144	174	204	235	/
HOLE SIZE B x H [mm]	200x200	300x200	400x200	500x200	600x200	700x200	800x200	1000x200
Q (m³/h) with s = 2m/s	84	125	171	216	261	307	352	445
HOLE SIZE B x H [mm]	/	300x300	400x300	500x300	600x300	/	800x300	1000x300
Q (m³/h) with s = 2m/s	/	208	284	359	435	/	586	737
HOLE SIZE B x H [mm]	/	/	400x400	/	600x400	/	800x400	1000x400
Q (m³/h) with s = 2m/s	/	/	403	/	609	/	821	1032
HOLE SIZE B x H [mm]	/	/	/	500x500	/	/	800x500	1000x500
Q (m³/h) with s = 2m/s	/	/	/	647	/	/	1055	1327
HOLE SIZE B x H [mm]	/	/	/	/	595x595*	/	/	/
Q (m³/h) with s = 2m/s	/	/	/	/	814	/	/	/
HOLE SIZE B x H [mm]	/	/	/	/	600x600	/	800x600	1000x600
Q (m³/h) with s = 2m/s	/	/	/	/	958	/	1290	1622

*Size for square tile ceilings, the only ones in which the measurements shown are external in mm.
Be careful not to confuse with the 600x600mm hole size.

REFERENCE FLOW RATE TABLE - GTF/26 SERIES

HOLE SIZE B x H [mm]	200x100	300x100	400x100	500x100	600x100	/	800x100	/
Q (m³/h) with s = 2m/s	35	58	86	108	130	/	173	/
HOLE SIZE B x H [mm]	/	300x150	400x150	500x150	600x150	700x150	800x150	/
Q (m³/h) with s = 2m/s	/	101	137	173	209	252	288	/
HOLE SIZE B x H [mm]	200x200	300x200	400x200	500x200	600x200	700x200	800x200	1000x200
Q (m³/h) with s = 2m/s	84	137	187	245	295	346	403	503
HOLE SIZE B x H [mm]	/	300x300	400x300	500x300	600x300	/	800x300	1000x300
Q (m³/h) with s = 2m/s	/	208	295	374	461	/	626	792
HOLE SIZE B x H [mm]	/	/	400x400	/	600x400	/	800x400	1000x400
Q (m³/h) with s = 2m/s	/	/	403	/	626	/	857	1080
HOLE SIZE B x H [mm]	/	/	/	500x500	/	/	800x500	1000x500
Q (m³/h) with s = 2m/s	/	/	/	647	/	/	1080	1368
HOLE SIZE B x H [mm]	/	/	/	/	595x595*	/	/	/
Q (m³/h) with s = 2m/s	/	/	/	/	814	/	/	/
HOLE SIZE B x H [mm]	/	/	/	/	600x600	/	800x600	1000x600
Q (m³/h) with s = 2m/s	/	/	/	/	958	/	1310	1656

*Size for square tile ceilings, the only ones in which the measurements shown are external in mm.
Be careful not to confuse with the 600x600mm hole size.



GTF/06 includes the G/01 grille, TF/02 filter frame and F/02 filter.

G/01: return grille with single row of 45° tilted fins parallel to the long side.

Notes: *Size suitable for installation on 600x600 panels (corresponding grille hole size: 561x561mm).


WITH G/01 RETURN GRILLE

BxH (base x height)	GTF/06	TF/02: Filter frame and filter (as standard)	F/02 Spare filter
300X200	-GTF/06300X200B	-TF/02300X200	-F/02300X200
400X200	-GTF/06400X200B	-TF/02400X200	-F/02400X200
500X200	-GTF/06500X200B	-TF/02500X200	-F/02500X200
600X200	-GTF/06600X200B	-TF/02600X200	-F/02600X200
800X200	-GTF/06800X200B	-TF/02800X200	-F/02800X200
1000X200	-GTF/06100X200B	-TF/021000X200	-F/021000X200
300X300	-GTF/06300X300B	-TF/02300X300	-F/02300X300
400X300	-GTF/06400X300B	-TF/02400X300	-F/02400X300
500X300	-GTF/06500X300B	-TF/02500X300	-F/02500X300
600X300	-GTF/06600X300B	-TF/02600X300	-F/02600X300
800X300	-GTF/06800X300B	-TF/02800X300	-F/02800X300
1000X300	-GTF/06100X300B	-TF/021000X300	-F/021000X300
400X400	-GTF/06400X400B	-TF/02400X400	-F/02400X400
600X400	-GTF/06600X400B	-TF/02600X400	-F/02600X400
800X400	-GTF/06800X400B	-TF/02800X400	-F/02800X400
1000X400	-GTF/06100X400B	-TF/021000X400	-F/021000X400
500X500	-GTF/06500X500B	-TF/02500X500	-F/02500X500
800X500	-GTF/06800X500B	-TF/02800X500	-F/02800X500
1000X500	-GTF/06100X500B	-TF/021000X500	-F/021000X500
595X595*	-GTF/06595X595B	-TF/02595X595	-F/02595X595
600X600	-GTF/06600X600B	-TF/02600X600	-F/02600X600
1000X600	-GTF/06100X600B	-TF/021000X600	-F/021000X600

Detail of the fixing of the GTF inspectionable grille



special safety rope + hook

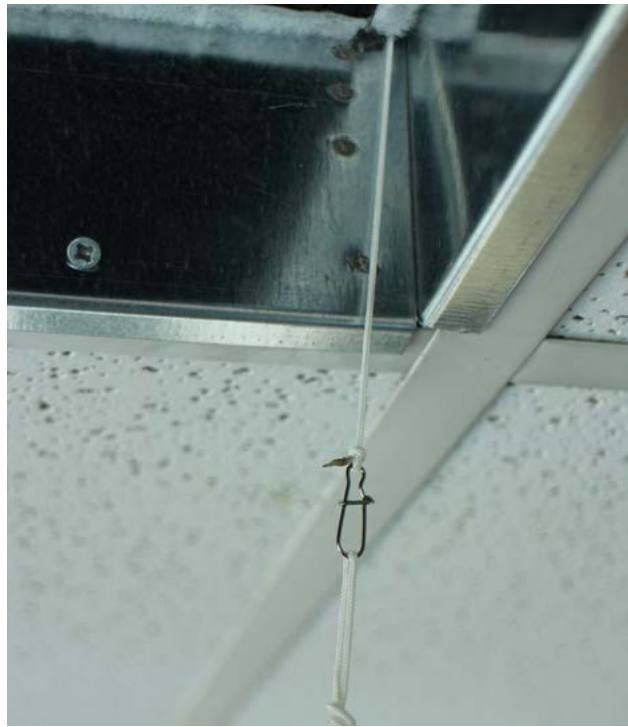

detail showing perfect adhesion to the ceiling



detail of a neodymium magnet

**RELATED PRODUCTS:**

GTF PVC PLENUM

easy combi delivery/return vent

Easy combi is a vent with delivery and return integrated in one single unit, with nominal sizes 500 x 150 mm.

CONSTRUCTION MATERIAL: Anti-condensation PVC RAL 9010.

FIN PITCH: 20 mm.


CLASS: V0.

OPERATING TEMPERATURE: -30°C +60°C.

VENT FIXING: clips.



vent complete with PVC plenum (see also below)

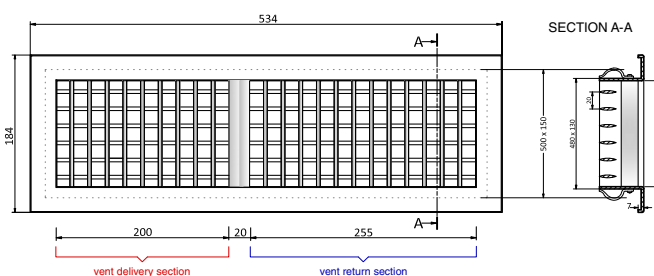

ACCESSORIES:

COMBIS01 CALIBRATION DAMPER 500X150*



Contrast damper with opposite movement.

CONSTRUCTION MATERIAL: Anti-condensation PVC and bayblend.

FIN PITCH: 44 mm.

CLASS: V0.

OPERATING TEMPERATURE: -30°C +60°C.

*Optional accessory

COMBIPL PVC PLENUM 500X150X175



COMBIPL is a plenum with delivery and return integrated in one single unit. It features airtight separation between the delivery and the return sections, to prevent air short circuits. Once installed, it appears as a single element. Complete with two Ø125 or Ø160 mm (oval type) rear collars.

CONSTRUCTION MATERIAL: Anti-condensation PVC, thickness 3 mm. With polyethylene foam outer cover.

CLASS: V0.


OPERATING TEMPERATURE: -30°C +60°C.

REFERENCE FLOW RATE TABLE

EASY COMBI	Useful area	Q (m³/h) s = 1 m/s	Q (m³/h) s = 2 m/s	Q (m³/h) s = 2.5 m/s	Q (m³/h) s = 3 m/s	Q (m³/h) s = 4 m/s
		Headloss 1 Pa	Headloss 3 Pa	Headloss 5 Pa	Headloss 7 Pa	Headloss 12 Pa
DELIVERY section	0.02	72	144	180	216	288
RETURN section	0.0255	94	187	235	282	374

COMBI SERIES VENT WITH ACCESSORIES

Code	Description
COMBIBO500X150B	Combined delivery/return vent with 2 rows of fins (vertical at the front)
COMBIS01500X150	Contrast calibration damper with separator
COMBIPL50X15P12	PVC plenum with bulkhead, with two Ø125mm collars
COMBIPL50X15P16	PVC plenum with bulkhead, with two Ø160mm collars

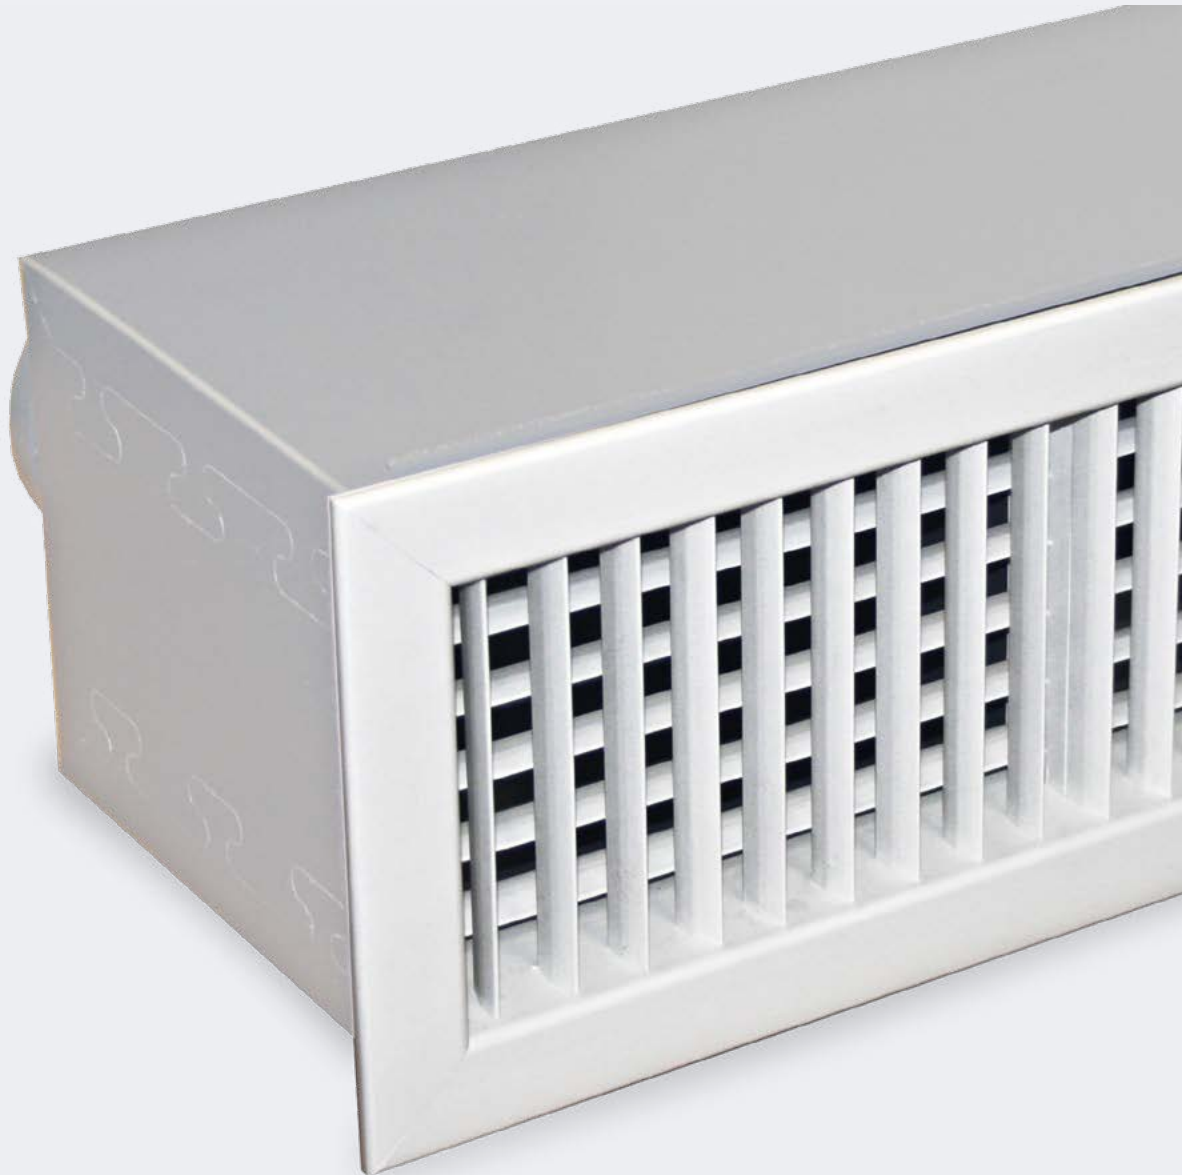**Easy combi delivery/return vent**

Easy combi delivery/return vent, made of anti-condensation PVC RAL 9010, is integrated in one single unit, with nominal sizes 500 x 150 mm.

multi-directional diffusers - df series



FLAT multi-directional diffuser with hidden frame

CONSTRUCTION MATERIAL:

White RAL9010 painted aluminium screen, RAL 9010 PVC frame.
On the inner face of the screen is an insulation panel made of
fores, thickness 6 mm.

Fixing of the screen to the frame using springs

SIZES AND QUICK SELECTION OF DF DIFFUSERS

Code	Plenum coupling NECK measurements (mm)	EXTERNAL sizes (mm)	Area on useful diffusion edge (m ²)	Flow rate (m ³ /h) with v= 2.5 m/s Headloss: 2 Pa	Flow rate (m ³ /h) with v= 3 m/s Headloss: 3 Pa	Flow rate (m ³ /h) with v= 4 m/s Headloss: 5 Pa	Flow rate (m ³ /h) with v= 5 m/s Headloss: 8 Pa	Flow rate (m ³ /h) with v= 6 m/s Headloss: 12 Pa
-DF/150X150B	150 x 150	280 x 280	0.0135	122	146	195	243	292
-DF/225X225B	225 x 225	355 x 355	0.0169	153	183	244	305	366
-DF/300X300B	300 x 300	430 x 430	0.0208	184	221	295	368	442
-DF/375X375B	375 x 375	505 x 505	0.0243	218	262	349	437	524

(DF diffuser flow rates are for 14 mm high perimeter slot; for 17 mm slots, increase the flow rates by 22%)

multi-directional diffusers - dfc series



FLAT multi-directional diffuser with exposed frame.

CONSTRUCTION MATERIAL:

RAL9010 painted aluminium screen, RAL 9010 PVC frame.
On the inner face of the screen is an insulation panel made of
fores, thickness 6 mm.

Fixing of the screen to the frame using springs

SIZES AND QUICK SELECTION OF DFC DIFFUSERS

Code	Plenum coupling NECK measurements (mm)	EXTERNAL sizes (mm)	Area on useful diffusion edge (m ²)	Flow rate (m ³ /h) with v= 2.5 m/s Headloss: 2 Pa	Flow rate (m ³ /h) with v= 3 m/s Headloss: 3 Pa	Flow rate (m ³ /h) with v= 4 m/s Headloss: 5 Pa	Flow rate (m ³ /h) with v= 5 m/s Headloss: 8 Pa	Flow rate (m ³ /h) with v= 6 m/s Headloss: 12 Pa
-DFC/150X150B	150 x 150	280 x 280	0.0082	73	88	117	147	176
-DFC/225X225B	225 x 225	355 x 355	0.0116	104	125	167	208	250
-DFC/300X300B	300 x 300	430 x 430	0.0154	138	166	221	277	277
-DFC/375X375B	375 x 375	505 x 505	0.0190	171	205	273	342	410

ACCESSORIES:**DAMPER S/02**

Manual contrast damper with opposite movement.

CONSTRUCTION MATERIAL: Anti-condensation PVC and bayblend.

CLASS: V0.

OPERATING TEMPERATURE: -30°C +60°C.

FIXING METHOD: screws.


**EXPANDED POLYISOCYANURATE PLENUM PAL/02**

Junction plenum with circular side connection.

CONSTRUCTION MATERIAL:

Expanded polyisocyanurate (PAL).

The plenum is supplied with a quick-connection coupling to allow the diffuser to be installed without the use of screws or special tools.

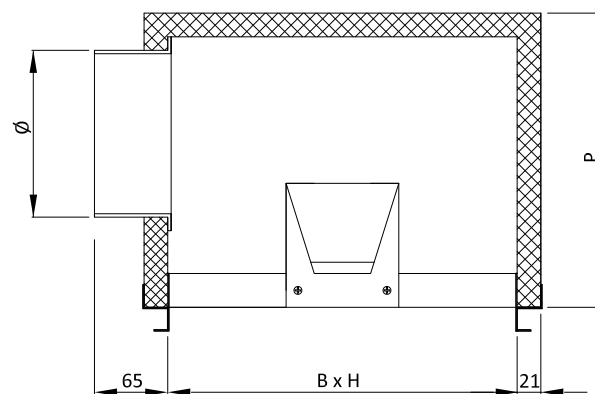

Code for plenums suitable for DF-DFC series diffusers	sizes B x H [mm]	D [mm]	Ø [mm]
-PAL/02150X150	150x150	250	145
-PAL/02225X225	225x225	250	145
-PAL/02300X300	300x300	300	195
-PAL/02375X375	375x375	350	245
-PAL/02450X450	450x450	350	245

linear diffusers - dl series



Slotted linear diffuser with directional nozzles, DL /-A..._ series
Slotted linear diffuser without directional nozzles, DL /-B..._ series.

Construction material:

RAL 9010 anti-condensation PVC for the frame;
Black RAL 9005 or white RAL 9010 ABS for nozzles and nozzle supports.

Fixing: with screws on special brackets.

Operating temperature: -30°C... +60°C.

The diffuser comes complete with metal fixing brackets.

Accessories:

- Plenum in anti-condensation PVC. ADF-P04;
- Anti-condensation PVC sliding damper, mod. ADF-S/04 (only in combination with PVC plenum);
- Plenum in Hydrotec coupled with polyester, resistant version (resistant to aggressive atmospheres), mod. PAL/04;
- Sheet metal sliding damper, mod. S/04 (only in association with PAL plenums).



-DL with 1 slot



-DL with 2 slots



-DL with 3 slots




-DL with 4 slots




DL DIFFUSER CODING

-DL	/	1	A	...	(B)
LINEAR DIFFUSER	-	1 slot 2 slots 3 slots 4 slots	A with directional nozzles B without directional nozzles	nominal length [mm]	Without B = with black nozzles B = with white nozzles

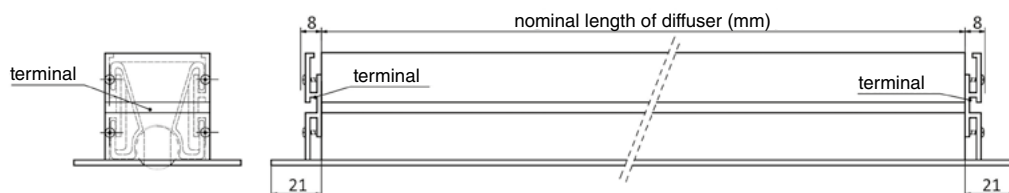


LONGITUDINAL VIEW OF DL DIFFUSER [with terminals]


Note: minimum - maximum length of the diffuser plenum = nominal length + 20 - 25 mm




SECTION 1-slot model



SECTION 2-slot model



SECTION 3-slot model

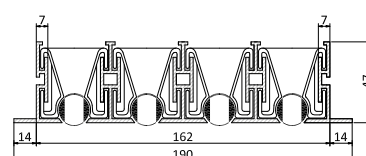

SECTION 4-slot model

REFERENCE FLOW RATE TABLE - DL SERIES


Nominal size [mm]	no. of slots	Useful area [m ²]	Flow rate [m ³ /h] with s = 1 m/s Headloss: 2 Pa	Flow rate [m ³ /h] with s = 2 m/s Headloss: 4 Pa	Flow rate [m ³ /h] with s = 2.5 m/s Headloss: 6 Pa	Flow rate [m ³ /h] with s = 3 m/s Headloss: 9 Pa	Flow rate [m ³ /h] with s = 4 m/s Headloss: 13 Pa
600	1	0.0090	33	65	83	99	132
800		0.0120	43	86	108	129	172
1000		0.0150	54	108	135	162	216
1200		0.0180	65	129	162	194	259
1600		0.0235	87	174	218	261	348
2000		0.0300	108	216	270	324	432
600	2	0.0180	65	130	162	195	260
800		0.0240	86	173	216	258	344
1000		0.0300	108	216	270	324	432
1200		0.0360	130	260	325	390	520
1600		0.0480	173	346	433	519	692
2000		0.0600	216	432	540	648	864
600	3	0.0270	97	194	243	291	388
800		0.0360	130	260	325	390	520
1000		0.0450	162	324	405	486	648
1200		0.0540	195	390	488	585	780
1600		0.0720	260	520	650	780	1040
2000		0.0900	324	648	810	972	1296
600	4	0.0360	130	260	325	390	520
800		0.0480	173	346	433	519	692
1000		0.0600	216	432	540	648	864
1200		0.0720	260	520	650	780	1040
1600		0.0960	347	693	866	1038	1384
2000		0.1200	432	864	1080	1296	1728



LINEAR DIFFUSERS - DL AND DLK SERIES

Description	Codes					
	Nominal L 600 mm	Nominal L 800 mm	Nominal L 1000 mm	Nominal L 1200 mm	Nominal L 1600 mm	Nominal L 2000 mm
1 SLOT						
DL models - linear diffusers						
With black nozzles	-DL/1A600	-DL/1A800	-DL/1A1000	-DL/1A1200	-DL/1A1600	-DL/1A2000
With white nozzles	-DL/1A600B	-DL/1A800B	-DL/1A1000B	-DL/1A1200B	-DL/1A1600B	-DL/1A2000B
Without nozzles	-DL/1B600B	-DL/1B800B	-DL/1B1000B	-DL/1B1200B	-DL/1B1600B	-DL/1B2000B
DLK models - linear diffuser composition modules for nominal L > 2000mm						
With black nozzles	-DLK/1A600	-DLK/1A800	-DLK/1A1000	-DLK/1A1200	-DLK/1A1600	-DLK/1A2000
With white nozzles	-DLK/1A600B	-DLK/1A800B	-DLK/1A1000B	-DLK/1A1200B	-DLK/1A1600B	-DLK/1A2000B
Without nozzles	-DLK/1B600	-DLK/1B800	-DLK/1B1000	-DLK/1B1200	-DLK/1B1600	-DLK/1B2000
DLK terminals	T/1B					
Fixing between modules	FISSAGGIODLK1					
2 SLOTS						
DL models - linear diffusers						
With black nozzles	-DL/2A600	-DL/2A800	-DL/2A1000	-DL/2A1200	-DL/2A1600	-DL/2A2000
With white nozzles	-DL/2A600B	-DL/2A800B	-DL/2A1000B	-DL/2A1200B	-DL/2A1600B	-DL/2A2000B
Without nozzles	-DL/2B600B	-DL/2B800B	-DL/2B1000B	-DL/2B1200B	-DL/2B1600B	-DL/2B2000B
DLK models - linear diffuser composition modules for nominal L > 2000mm						
With black nozzles	-DLK/2A600	-DLK/2A800	-DLK/2A1000	-DLK/2A1200	-DLK/2A1600	-DLK/2A2000
With white nozzles	-DLK/2A600B	-DLK/2A800B	-DLK/2A1000B	-DLK/2A1200B	-DLK/2A1600B	-DLK/2A2000B
Without nozzles	-DLK/2B600	-DLK/2B800	-DLK/2B1000	-DLK/2B1200	-DLK/2B1600	-DLK/2B2000
DLK terminals	T/2B					
Fixing between modules	FISSAGGIODLK2					
3 SLOTS						
DL models - linear diffusers						
With black nozzles	-DL/3A600	-DL/3A800	-DL/3A1000	-DL/3A1200	-DL/3A1600	-DL/3A2000
With white nozzles	-DL/3A600B	-DL/3A800B	-DL/3A1000B	-DL/3A1200B	-DL/3A1600B	-DL/3A2000B
Without nozzles	-DL/3B600B	-DL/3B800B	-DL/3B1000B	-DL/3B1200B	-DL/3B1600B	-DL/3B2000B
DLK models - linear diffuser composition modules for nominal L > 2000mm						
With black nozzles	-DLK/3A600	-DLK/3A800	-DLK/3A1000	-DLK/3A1200	-DLK/3A1600	-DLK/3A2000
With white nozzles	-DLK/3A600B	-DLK/3A800B	-DLK/3A1000B	-DLK/3A1200B	-DLK/3A1600B	-DLK/3A2000B
Without nozzles	-DLK/3B600	-DLK/3B800	-DLK/3B1000	-DLK/3B1200	-DLK/3B1600	-DLK/3B2000
DLK terminals	T/3B					
Fixing between modules	FISSAGGIODLK3					
4 SLOTS						
DL models - linear diffusers						
With black nozzles	-DL/4A600	-DL/4A800	-DL/4A1000	-DL/4A1200	-DL/4A1600	
With white nozzles	-DL/4A600B	-DL/4A800B	-DL/4A1000B	-DL/4A1200B	-DL/4A1600B	
Without nozzles	-DL/4B600B	-DL/4B800B	-DL/4B1000B	-DL/4B1200B	-DL/4B1600B	
DLK models - linear diffuser composition modules for nominal L > 2000mm						
With black nozzles	-DLK/4A600	-DLK/4A800	-DLK/4A1000	-DLK/4A1200	-DLK/4A1600	-DLK/4A2000
With white nozzles	-DLK/4A600B	-DLK/4A800B	-DLK/4A1000B	-DLK/4A1200B	-DLK/4A1600B	-DLK/4A2000B
Without nozzles	-DLK/4B600	-DLK/4B800	-DLK/4B1000	-DLK/4B1200	-DLK/4B1600	-DLK/4B2000
DLK terminals	T/4B					
Fixing between modules	FISSAGGIODLK4					


plenum for linear diffusers - adf-p04 series

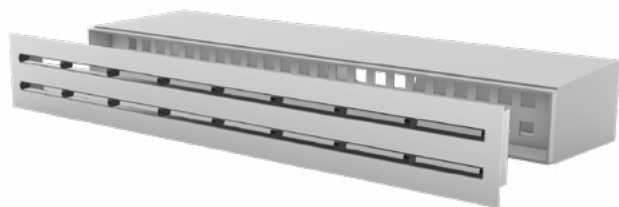

Equaliser supplied as standard on the plenum
Note: image including the linear diffuser (to be ordered separately)



special fixing bracket included with the linear diffuser, to be installed on site on the plenum equaliser using screws




plenum box for "DL" series linear diffusers with 3 slots, with Øeq.160 reversible connections (for diffusers with length L=600 mm, L=1200 mm) and with Øeq.200 reversible connections (for diffusers with length L=800 mm, L=1000 mm, L=1600 mm, L=2000 mm).

The collar is fixed as standard in the "axial" position (rear collar), but it can easily be moved on site to either of the two long sides by swapping the collar itself with the blind plate screwed onto the side face.

The collar applied to one of the two 'short' side faces is only on specific request.

The plenum is equipped with an equaliser, consisting of a rectangular 4 mm thick "perforated" PVC plate permanently incorporated into the plenum itself.

Plenums longer than Lnom.1000 mm are supplied in two symmetrical pieces, each half the required plenum length; the two pieces are joined together very easily and solidly on site by screwing the appropriate PVC strips onto the two pieces.

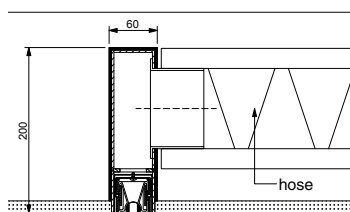



1-SLOT PVC DIFFUSER PLENUMS

Nominal size L [mm]	Plenum Code	Ø collars [mm]	No. of collars	Collar position
600	ADF-P04060X1L12	Ø125	1	Side, long side
800	ADF-P04080X1L12	Ø125	1	Side, long side
1000	ADF-P04100X1L12	Ø125	1	Side, long side
1200	ADF-P04120X1L12	Ø125	2	Side, long side
1600	ADF-P04160X1L12	Ø125	2	Side, long side
2000	ADF-P04200X1L12	Ø125	2	Side, long side

The plenums for sizes 1200, 1600 and 2000 mm consist of:

Plenum nom. L = 1200 mm: formed by no. 2 customised plenums with int. L = 608 mm to be assembled on site;
Plenum nom. L = 1600 mm: formed by no. 2 customised plenums with int. L = 808 mm to be assembled on site;
Plenum nom. L = 2000 mm: formed by no. 2 customised plenums with int. L = 1008 mm to be assembled on site.

Note: for PVC sliding dampers, the order must be placed together with the order for the PVC Plenum.

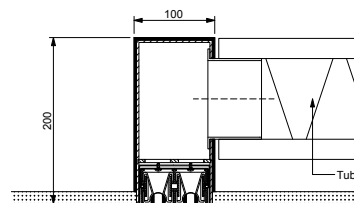



Note: example of plenum installation with collar "moved" to the long side

2-SLOT DIFFUSER PVC PLENUMS

Nominal size L [mm]	Plenum Code	Ø standard collar*	Ø applicable collar**
600	ADF-P04600X2	1 x Øeq.160	Øeq.125
800	ADF-P04800X2	1 x Øeq.160	Øeq.125
1000	ADF-P041000X2	1 x Øeq.160	Øeq.125
1200	ADF-P041200X2	2 x Øeq.160	Øeq.125
1600	ADF-P041600X2	2 x Øeq.160	Øeq.125
2000	ADF-P042000X2	2 x Øeq.160	Øeq.125

* oval collar installed as standard at the rear. However, thanks to the "reversibility" of the plenum it can also be moved on site to the long side

** collars that can be used to replace the Ø160 collars directly on site. In this case, it will be necessary to order the plate separately, code ADF-P04PI125

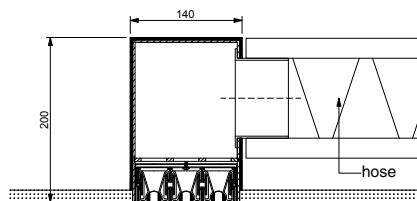



Note: example of plenum installation with collar "moved" to the long side

3-SLOT DIFFUSER PVC PLENUMS

Nominal size L [mm]	Plenum Code	Ø standard collar*	Ø applicable collar**
600	ADF-P04600X3	1 x Øeq.160	-
800	ADF-P04800X3	1 x Øeq.200	Øeq.160
1000	ADF-P041000X3	1 x Øeq.200	Øeq.160
1200	ADF-P041200X3	2 x Øeq.160	-
1600	ADF-P041600X3	2 x Øeq.200	Øeq.160
2000	ADF-P042000X3	2 x Øeq.200	Øeq.160

* oval collar installed as standard at the rear. However, thanks to the "reversibility" of the plenum it can also be moved on site to the long side

** collars that can be used to replace the Ø160 or Ø200 collars directly on site. In this case, it will be necessary to order the plate separately, code ADF-P04PI160

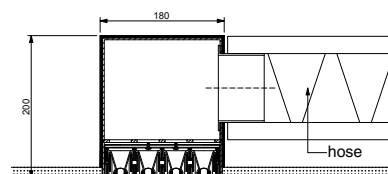

Note: example of plenum installation with collar "moved" to the long side

4-SLOT DIFFUSER PVC PLENUMS

Nominal size L [mm]	Plenum Code	Ø standard collar*	Ø applicable collar**
600	ADF-P04600X4	1 x Øeq.160	-
800	ADF-P04800X4	1 x Øeq.200	Øeq.160
1000	ADF-P041000X4	1 x Øeq.200	Øeq.160
1200	ADF-P041200X4	2 x Øeq.160	-
1600	ADF-P041600X4	2 x Øeq.200	Øeq.160
2000	ADF-P042000X4	2 x Øeq.200	Øeq.160


* oval collar installed as standard at the rear. However, thanks to the "reversibility" of the plenum it can also be moved on site to the long side

** collars that can be used to replace the Ø160 or Ø200 collars directly on site. In this case, it will be necessary to order the plate separately, code ADF-P04PI160

Plenum dimensional characteristics; possibility of installation of additional plate and PVC dampers for 2-slot plenums (for 1, 3 and 4 slot plenums see relevant data sheets)

Code	PVC supply parts	Depth (mm)	Length x height, max (mm)	Min. hole size on plasterboard (mm)	Nominal length
ADF-P04600X2	1 single piece	200	634 x 113	630 x 97	600
ADF-P04800X2	1 single piece	200	834 x 113	830 x 97	800
ADF-P041000X2	1 single piece	200	1034 x 113	1030 x 97	1000
ADF-P041200X2	2 pcs.	200	1235 x 113	1232 x 97	1200
ADF-P041600X2	2 pcs.	200	1635 x 113	1632 x 97	1600
ADF-P042000X2	2 pcs.	200	2035 x 113	2033 x 97	2000


Code	Semi-oval series collar(s)	standard collar position	position of blind plates	possibility of installation of optional plate with indicated Øeq.	Nominal length
ADF-P04600X2	1 x Ø _{eq.} 160	rear	1 x side	√ Ø _{eq.} 125	600
ADF-P04800X2	1 x Ø _{eq.} 160	rear	1 x side	√ Ø _{eq.} 125	800
ADF-P041000X2	1 x Ø _{eq.} 160	rear	1 x side	√ Ø _{eq.} 125	1000
ADF-P041200X2	2 x Ø _{eq.} 160	rear	2 x side	√ Ø _{eq.} 125	1200
ADF-P041600X2	2 x Ø _{eq.} 160	rear	2 x side	√ Ø _{eq.} 125	1600
ADF-P042000X2	2 x Ø _{eq.} 160	rear	2 x side	√ Ø _{eq.} 125	2000




PVC plate, thickness 3 mm, code ADF-P04PI125

Plate (optional) to be ordered separately, supplied with Øeq. 125 mm semi-oval collar, which makes it possible have a plenum with Ø125 connection by replacing the Øeq collar directly on site. 160 mm as standard.


PVC dampers, thickness 3 mm for 2-slot linear diffuser, mod. DL/2 (600/800/100)



for plenum with nom. length = 600 mm




for plenum with nom. length = 800 mm



for plenum with nom. length = 1000 mm

linear diffusers - ds series

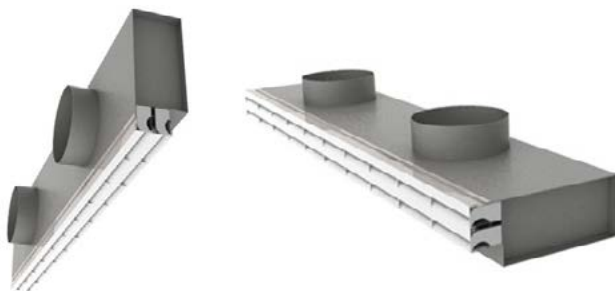


Slotted linear diffuser without frame

CONSTRUCTION MATERIAL:

Deflectors in RAL 9010 or RAL 9005 abs, guides in natural anodised aluminium.

CLASS 1 galvanised steel plenum with insulation, with aluminium snap-on collar. Side connection.

FIXING METHOD: By plenum suspension

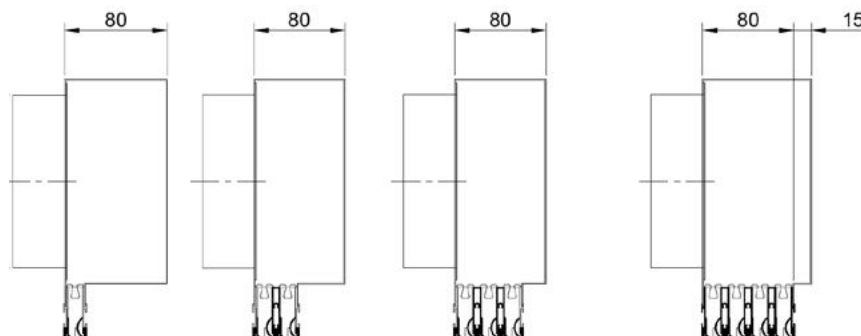

REFERENCE FLOW RATE TABLE - DS SERIES

1 Slot	L = 600millimeters	L = 800millimeters	L = 1000millimeters	L = 1500millimeters	L = 2000millimeters
Q (m³/h) with s = 4m/s	44	60	76	112	150
2 slots	L = 600millimeters	L = 800millimeters	L = 1000millimeters	L = 1500millimeters	L = 2000millimeters
Q (m³/h) with s = 4m/s	90	120	150	225	300
3 slots	L = 600millimeters	L = 800millimeters	L = 1000millimeters	L = 1500millimeters	L = 2000millimeters
Q (m³/h) with s = 4m/s	135	180	224	336	448
4 slots	L = 600millimeters	L = 800millimeters	L = 1000millimeters	L = 1500millimeters	L = 2000millimeters
Q (m³/h) with s = 4m/s	176	240	300	448	597

LINEAR DIFFUSERS - DS SERIES

DS nominal size	No. of slots			
	1	2	3	4
	Code	Code	Code	Code
600	-DS/1600	-DS/2600	-DS/3600	-DS/4600
800	-DS/1800	-DS/2800	-DS/3800	-DS/4800
1000	-DS/11000	-DS/21000	-DS/31000	-DS/41000
1500	-DS/11500	-DS/21500	-DS/31500	-DS/41500
2000	-DS/12000	-DS/22000	-DS/32000	-DS/42000

FITT AGIX LINE-S monobloc plenum/linear diffuser

Single-slot «monoblock» linear diffuser, having the plenum constituting a single body with the diffuser itself. Made entirely of PVC. It is modular: multiple plenums can be easily joined to form a multiple-length plenum/diffuser.

When ordering, it is recommended to specify whether the LINE-S is to be installed individually or in modules to be joined together at the construction site. In second case also specify the length and the number of the lines to be made.

Built-in Ø125 oval type PP collars, on the long side, can be exchanged in place with the plates on the back side (reversibility). The solution with Ø125 is particularly suitable for installations of air conditioning using Ø125 pipes; upon request, it is possible to Have Ø160 oval connections.

Materials of construction:

PVC anti-condensation; PP oval Ø125 collars.
External insulation of closed-cell polyethylene foam thick. 3 mm.

Color:

- Color of PVC diffuser/plenum body: gray-light RAL7035 PAINTABLE;
- Color of outer insulation: gray-light RAL7035;
- Color of threaded caps: fuchsia.

Place of installation:

It is ideal for ceiling/ceiling installation, particularly on plasterboard. It can also be installed on walls, with special preference on drywall. Compatible plasterboard thicknesses for fixing, regardless of the model, are 12.5 and 15 mm.



NEW

PLENUM / LINEAR DIFFUSERS FITT AGIX "LINE-S" SERIES

Code	Dimens. int. mouth (mm)	Collars side Ø125 ov. (for climate predominantlyem.)	Flow rate (m³/h) with v= 1 m/s	Flow rate (m³/h) with v= 2 m/s	Flow rate (m³/h) with v= 3 m/s	Effective length of the plenum excluding isolation. sides x height int. mouth (mm)
VMDLINE235x1125	494 x 23	1	40	80	120	500 x 23
VMDLINE365x1125	494 x 36	1	62	124	186	500 x 36
VMDLINE231x2125	994 x 23	2	83	166	249	1000 x 23
VMDLINE361x2125	994 x 36	2	126	252	378	1000 x 36

v=crossing velocity at the mouth

ACCESSORIES

Code	Description
VMDLINEK235	kit consisting of no. 2 fins for LINE-S having inner mouth dimensions 494x23 mm
VMDLINEK231	kit consisting of no. 4 fins for LINE-S having inner mouth dimensions 994x23 mm
VMDLINEK365	kit consisting of no. 4 fins (in a double row) for LINE-S with mouth interior 494x36 mm
VMDLINEK361	kit consisting of no. 8 fins (in a double row) for LINE-S with mouth interior 994x36 mm

Specific optional accessories. Thin PP fins, which can be added (in production) to direct airflow, including associated screws.



flat screen circular diffusers - dc/10 series

DC/10 flat screen diffusers are installed in false ceilings and can be used in a variety of business, residential and commercial environments with installation heights of up to 3 metres, depending on the chosen size. Suitable for air with high summer delta T.


CONSTRUCTION MATERIAL: Upper section in RAL 9010 colour epoxy powder-coated aluminium, lower section in RAL 9010 colour epoxy powder-coated galvanised steel.

INSTALLATION:
The diffuser is fixed directly to a plenum or the ceiling.



DC/10 CONSTRUCTION SIZES AND ACCESSORIES


Nominal size [mm]	D [mm]	U [mm]	d [mm]
100	240	200	100
125	240	200	125
160	300	260	160
200	360	320	200
250	460	420	250
315	540	500	315
400	540	500	400

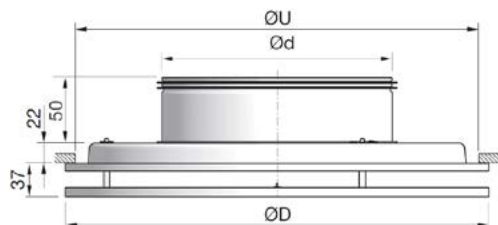

Calibration damper	Fixing brackets
Code	Code
-	-
-SDT125	SDM125
-SDT160	SDM160
-SDT200	SDM200
-SDT250	SDM250
-SDT315	SDM315
-SDT400	SDM400

SDT CALIBRATION DAMPER

Circular butterfly calibration damper.
CONSTRUCTION MATERIAL: Galvanised sheet metal.

**SDM FIXING BRACKETS**

Set consisting of 4 brackets for ceiling installation of the DC/10 diffuser, available sizes from Ø100 to Ø400mm.
CONSTRUCTION MATERIAL: Galvanised sheet metal.




Code	Area [m²]	Air flow rate [m³/h]	Reach (m)	Sound power (dBa)	Air flow rate [m³/h]	Reach [m]	Sound power (dBa)	Air flow rate [m³/h]	Reach [m]	Sound power (dBa)	Air flow rate [m³/h]	Reach [m]	Sound power (dBa)
Considering the following parameters:													
		Air speed = 2.5m/s Headloss = 7Pa			Air speed = 4m/s Headloss = 19Pa			Air speed = 5m/s Headloss = 29Pa			Air speed = 7m/s Headloss = 58Pa		
-DC/10100	0.010	90	2.2	<20	144	3.4	25-30	180	4.2	30-35	253	5.6	40-45
-DC/10125	0.011	99	1.9	<20	158	2.9	25-30	198	3.5	35-40	277	4.7	40-45
-DC/10160	0.017	151	2.3	<20	240	3.4	20-25	299	4.2	25-30	418	5.6	40-45
-DC/10200	0.023	207	2.4	<20	331	3.7	25-30	414	4.5	30-35	580	6.1	40-45
-DC/10250	0.030	270	2.5	20-25	432	3.8	30-35	540	4.6	35-40	756	6.3	45-50
-DC/10315	0.037	334	2.5	<20	533	3.8	25-30	668	4.6	30-35	932	6.2	40-45

steel valves - v/04 series



valve body and screw disc

assembly collar

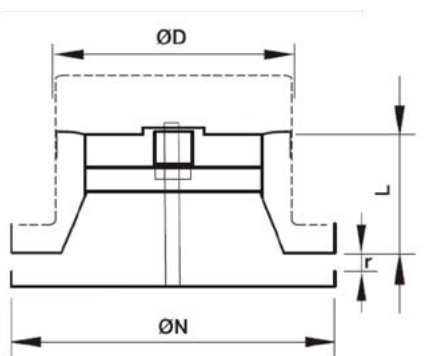

Air intake/extraction valve suitable for homes, offices, etc. Good regulation capacity thanks to the manually adjustable flat disc, and insulated on the inside with 10 mm thick polyethylene foam.

CONSTRUCTION

Made of RAL 9010 white epoxy powder-coated metal sheet steel. Metal sheet collar.

The valve body has a polyethylene foam gasket to ensure a tight seal on the mounting collar, adapter, air duct. The 10 mm thick PE foam of the disc allows hermetic seal of the valve.

FIXING METHOD

With steel clips integrated in the valve body and which fit onto the collar or a compatible adapter.

The connection can be with flexible hoses or with the VMAVC-125 adapters for the Ø125 model, which do not require a collar and can support the valve itself.

The mounting collar can be fixed to the support (plasterboard or else) using screws (not supplied) or other fixing systems.

Code	Ø D (mm)	Ø N (mm)	L (mm)	r (mm)*	insulation thickness (mm)	adjustment turns (0-max)*
VMC-04-125	125	160	60	var. 0-20	10	0...20
-V/04161	161	195	60	var. 0-20	10	0...20
-V/04200	200	238	63	var. 0-20	10	0...20


* If necessary, the valve can be further adjusted up to 30 mm, although in this case the possibility of having the screw supported by two supports will be lost.

ø150 flat diffusers



Code	Description	material and finish	for pipe	Screen dim. [mm]
VMDP20X20B150	Flat screen diffuser with frame (pipe excluded)	aluminium RAL 9010	Ø 150	200x200






polypropylene extraction valves - v/01 series

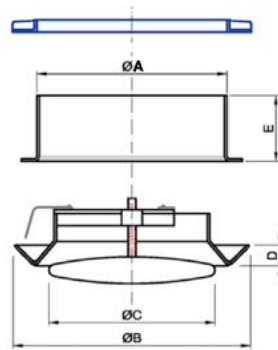

Air extraction valve with retaining frame (cylinder) to be fixed to the channel or hose, with valve body, millimetre-adjustable central plate, counterframe.

CONSTRUCTION MATERIAL:
RAL 9010 white polypropylene.

COLLAR FIXING: With front screws.
VALVE FIXING: Screwed into the collar.
ADJUSTMENT: Manual.

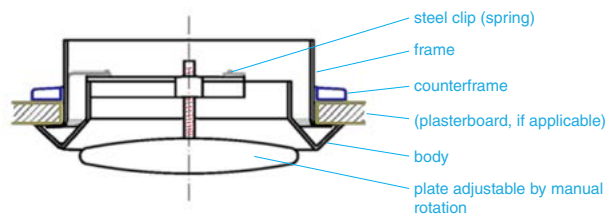

Areas highlighted in yellow: recommended maximum flow rates according to the valve opening level (25%, 50%, 75% and maximum opening)

Code	Ø A (mm)	Ø B (mm)	Ø C (mm)	D (mm)	E (mm)	max. plate excursion (mm)
-V/01100	99	148	87	20	53	20
-V/01125*	124	163	104	20	53	20
-V/01150	149	185	130	20	53	20
-V/01200	199	240	178	20	53	20

insurance certificate



Airplast srl guarantees its products with a specific insurance cover for all damage that may be caused to third parties.

Airplast srl products are covered by a specific policy with the following conditions:

- **MAXIMUM LIABILITY: EURO 15,000,000**
- **VALIDITY: WORLDWIDE**
- **VALIDITY OF THE COVER FROM THE DATE OF SALE**

The cover for damages also applies the following, insofar as they occur or are presumed to occur: repair, meaning the modification or rectification of the defective product and the installation of the product free of any defects; replacement, i.e. the removal of the defective product and the installation of a corresponding product free of defects.

See the general terms and conditions of sale on the following page of the [airplast.it/en](https://www.airplast.it/en) website:
<https://www.airplast.it/en/general-terms-and-conditions-sale>

certified company quality



Airplast srl implements a business management policy aimed at ensuring the highest quality in terms of technology, products and services, in full respect of the environment in which it operates.

The certification of the quality system obtained by the company ensures compliance with the requirements of the **UNI EN ISO 9001:2015** standards in relation to the design, manufacturing and sale of:

- aeraulic products
- accessories for air diffusion and heat recovery ventilation



FITT VENTILATION SOLUTIONS

This is the business area of the FITT Group that develops professional solutions, manufacturing complete HRV (Heat Recovery Ventilation) and air distribution systems for the air quality of residential environments, for energy saving and the comfort of people.

For more information:

AIRPLAST S.r.l. a sole shareholder company

Head Office: Via Piave, 8 – 36066 Sandrigo (VI), Italy

Warehouse - Production: Via Aldo Moro, 10 – 36060 Pianezze (VI), Italy

Tel: +39 0424 1754519 | airplast.it

Airplast S.r.l. is a company of the FITT Group